


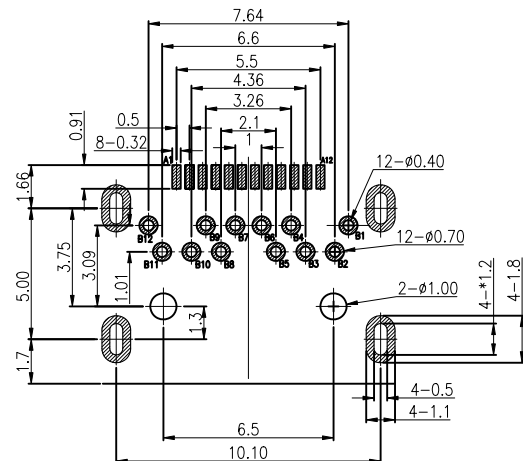
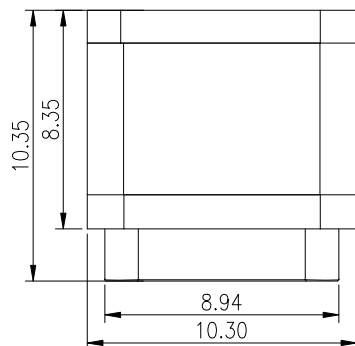
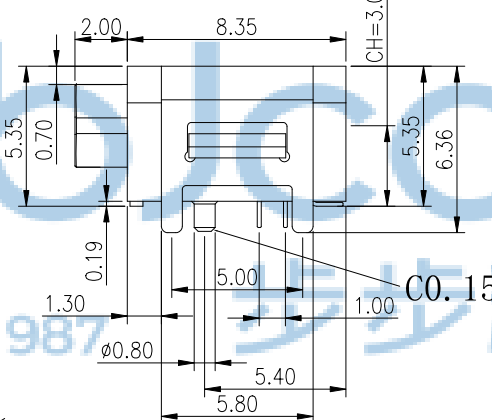






RECOMMENDED PCB LAYOUT
Tolerance: $\pm 0.05\text{mm}$

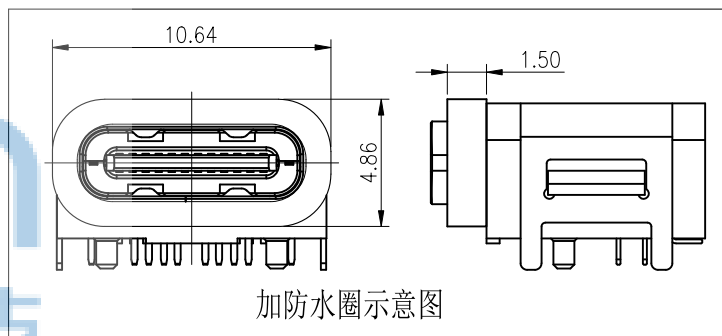

点胶水圈示意图

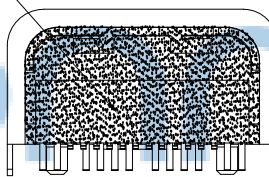

加防水圈示意图

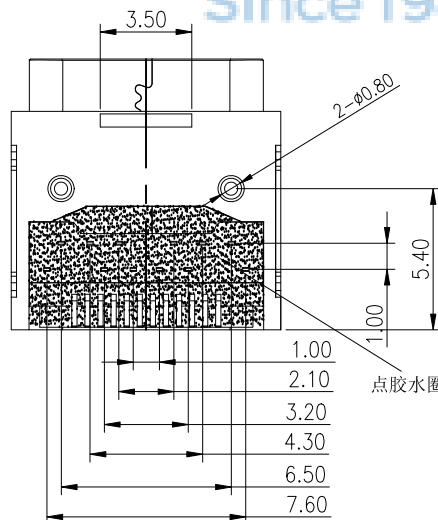

点胶水圈示意图



A1	GND	B12	GND
A2	SSTXP1	B11	SSTXP1
A3	SSTXN1	B10	SSTXN1
A4	VBUS	B09	VBUS
A5	CC1	B08	VBUS
A6	DP1	B07	DN2
A7	DN1	B06	DP2
A8	SBU1	B05	CC2
A9	VBUS	B04	VBUS
A10	SSRXN2	B03	SSRXN2
A11	SSRXP2	B02	SSRXP2
A12	GND	B01	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0366-2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

NOTE:

- MECHANICAL PERFORMANCE:
 - 1-1. INSERTION FORCE: $0.5 \sim 2.0\text{kgf}$.
 - 1-2. REMOVAL FORCE: $0.8\text{kgf} \sim 2.0\text{kgf}$.
 - 1-3. DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE:
 - 2-1. CURRENT RATING: 3.0A
VOLTAGE RATING: 5.0V
 - 2-2. LLCR:
VBUS & GND PINS AND OTHER PINS: $40\text{m}\Omega/\text{PIN MAX}$.
SHIELD: $50\text{m}\Omega/\text{MAX}$.
LLCR MAX. CHANGE OF ALL PINS: $10\text{m}\Omega$.
 - 2-3. INSULATION RESISTANCE: $100\text{M}\Omega/\text{MIN}$
 - 2-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: $-25^\circ\text{C} \sim 85^\circ\text{C}$.
- IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C .

NO	DESCRIPTION	QTY	MATERIAL	REMARKS
1	HOUSING	1PCS	LCP	BLACK
2	SHELL HOUSING	1PCS	LCP	BLACK
3	CONTACT	1SET	Brass	半金镍 1u"
4	Bracket	1PCS	STAINLESS STEEL	镀镍 50u"
5	SHELL	1PCS	STAINLESS STEEL	镀镍 30u"
6	Middle clip	1PCS	STAINLESS STEEL	Cleaning
7	Run-RING	1PCS	Silica gel	BLACK







深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

NAME:

TYPE-C 24P 防水母座 L=10.35 CH=3.07 板上四脚插 带柱 端子SMT+DIP IPX7 带防水圈

APPD. JM_Zheng	PJ. NO.: 126-223-240002-N5G
CHKD. TSP	SIZE: A4 DRW NO.:
DR. LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

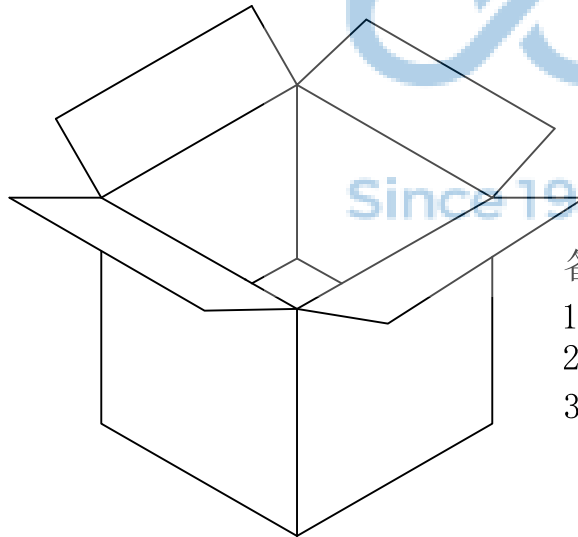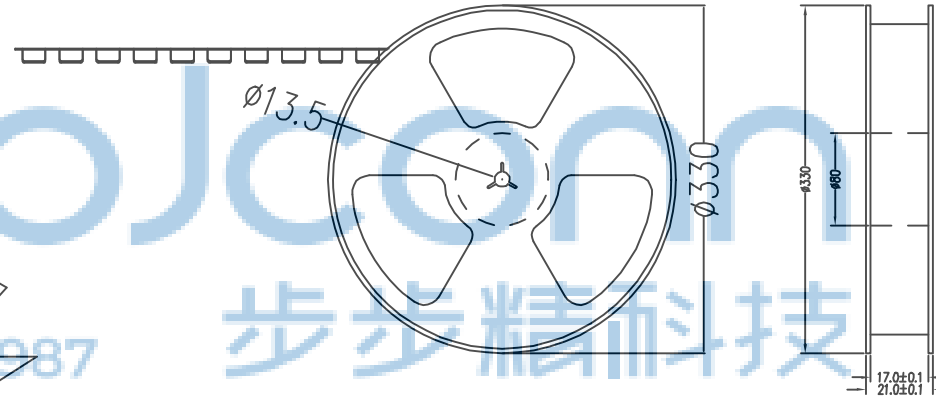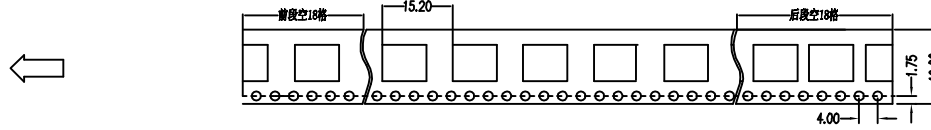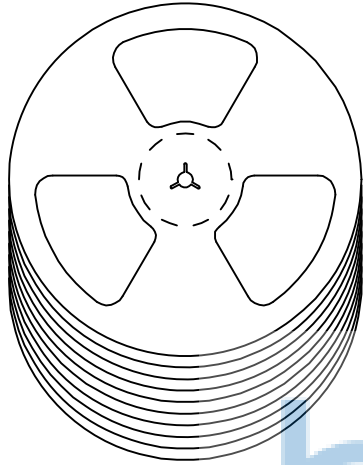

备注:

1. 包装数量: 600/PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME: TYPE-C 24P 防水插座 L=10.35 CH=3.07 板上四脚插 带柱 端子SMT+DIP 1PX7 带防水圈	
APPD. JM_Zheng	23/05'02	PJ. NO.: 126-223-240002-N5G	
CHKD. TSP	23/05'02	SIZE: A4 DRW NO.:	
DR. LYX	23/05'02	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0366-2		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	