
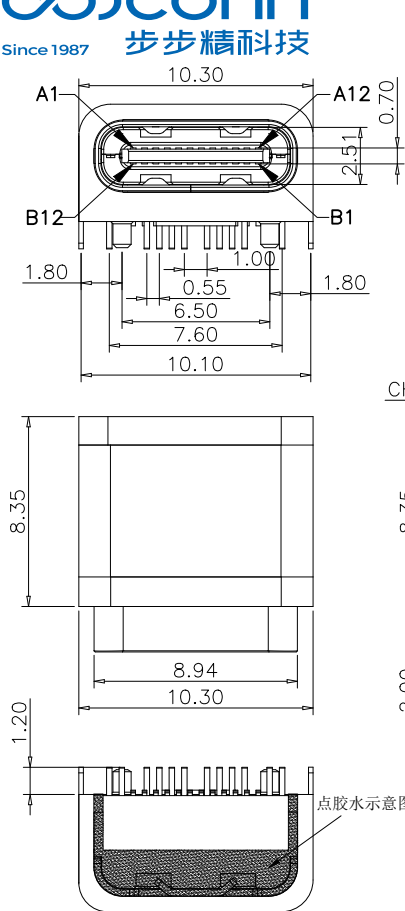
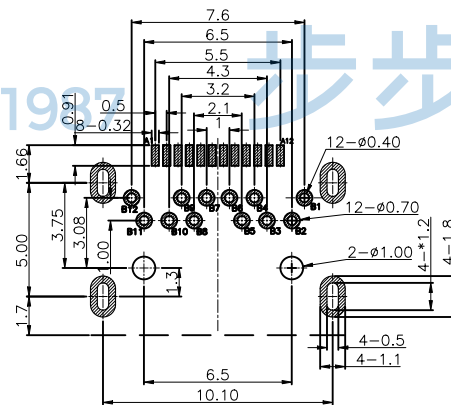
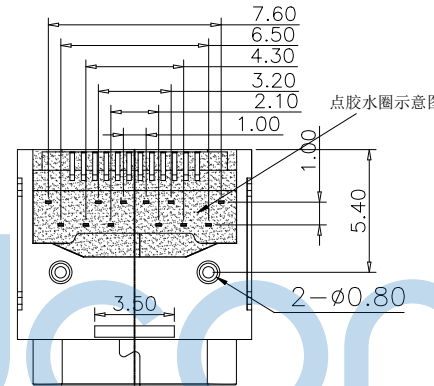
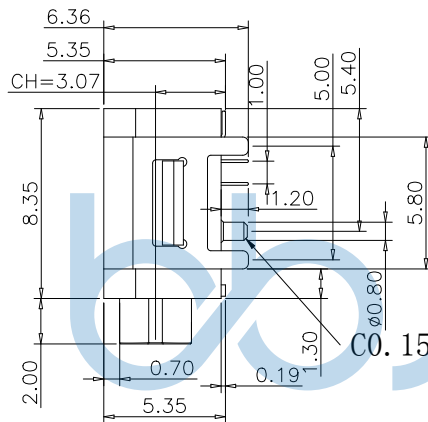



加防水圈示意图



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTE:

- MECHANICAL PERFORMANCE,
 - 1-1. INSERTION FORCE: 0.5~2.0kgf.
 - 1-2. REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 1-3. DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE,
 - 2-1. CURRENT RATING: 3.0A
VOLTAGE RATING: 5.0V
 - 2-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ /PIN MAX.
SHIELD: 50mΩ /MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 2-3. INSULATION RESISTANCE: 100MΩ MIN
 - 2-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25° C~+85° C.
- IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260° C.








NO	DESCRIPTION	QTY	MATERIAL	REMARKS
1	Rear high	1PCS	PA10T	BLACK
2	SHELL HOUSING	1PCS	PA10T	BLACK
3	CONTACT	1SET	C7025	接触, SMT 1u"
4	Bracket	1PCS	STAINLESS STEEL	镀镍 30u"
5	SHELL	1PCS	STAINLESS STEEL	镀镍 30u"
6	Middle clip	1PCS	STAINLESS STEEL	Cleaning
7	Run-RING	1PCS	Silica gel	BLACK

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0366-2

深圳市步步精科技有限公司		NAME: TYPE-C 24P 防水母座 SMT+DIP 板上四脚插 带柱 L=8.35 CH=3.07 IPX7 0形防水圈 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	APPD. JM_Zheng CHKD. LYX DR. TSP	PJ. NO.: 126-223-240001-N5G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	V _{BUS}	First	B9	V _{BUS}	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	V _{BUS}	First	B4	V _{BUS}	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	

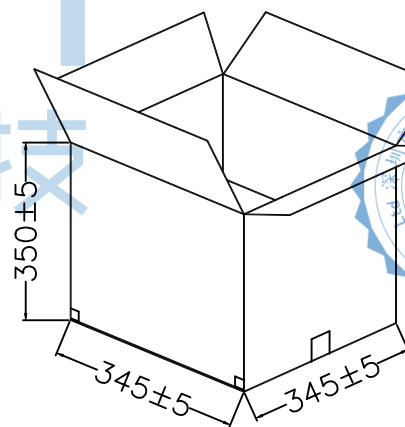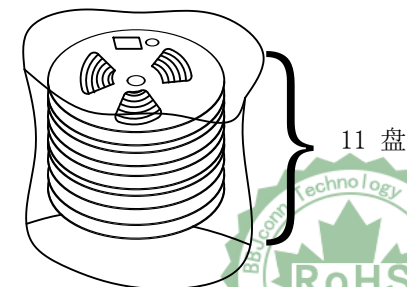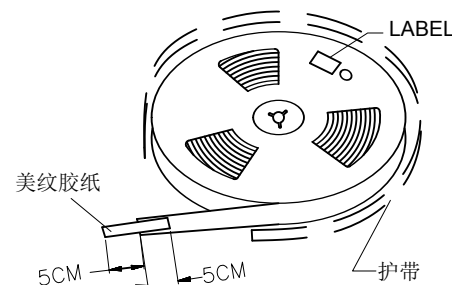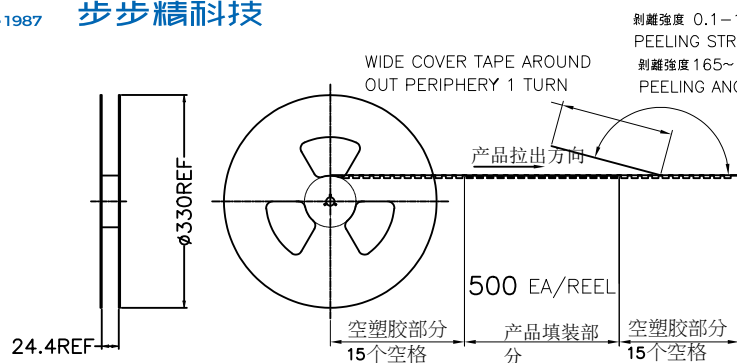

说明:

- 1.将检查合格的产品,放入承载带中,一盘包装550PCS;
- 2.将11盘承载带放入纸箱中;
- 3.将纸箱封装好,贴上标签.

每箱数量	净重(Kg)	毛重 (Kg)
5500PCS	XXX	XXX

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG,NO: 0366-2		深圳市步步精科技有限公司	
.X: ± 0.38	.XX: ± 0.25	.X*: $\pm 3^\circ$	.X*: $\pm 2^\circ$	.X*: $\pm 1^\circ$	NAME:TYPE-C 24P 防水母座 SMT+DIP 板上四脚插 带柱 L=8.35 CH=3.07 IPX7 0形防水圈 编带
APPD.	JM_Zheng	CHKD.	LYX	DR.	TSP
PJ. NO.:	126-223-240001-N5G	SIZE:	A4	DRW NO.:	
FINISH:	SEE NOTES	MAT'L.:	SEE NOTES	SCALE:	N/A
REV.:	A0	UNIT:	mm	PAGE:	2/2