

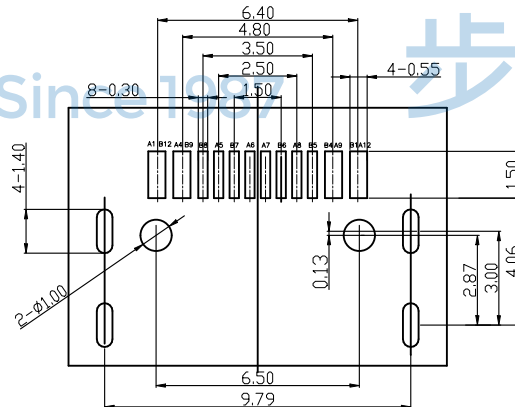
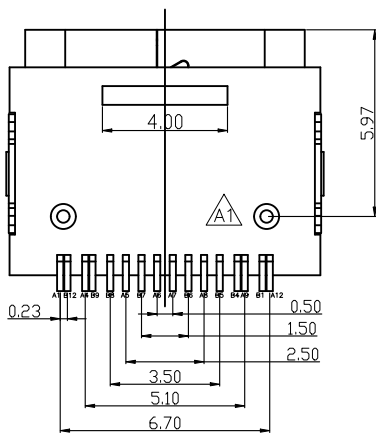
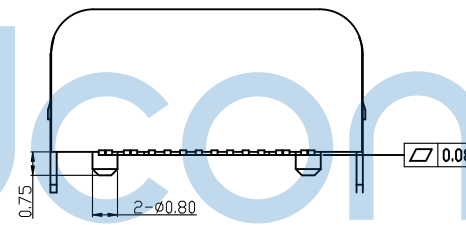

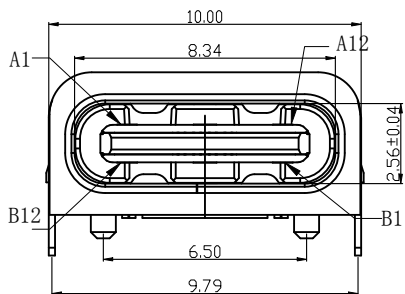


带防水圈示意图

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE: $6\text{N} \sim 20\text{N}$
7. UNMATING FORCE: $8\text{N} \sim 20\text{N}$
8. DURABILITY: 10,000 CYCLES
9. Water Resistance: IPX7



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$



6	OVER SHELL	STAINLESS STEEL	Ni 50u"MIN .OVERALL	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK UL 94V-0	1PCS
3	CONTACT	COPPER ALLOY C7025	1.Ni 50u" MIN OVERALL 2.CONTACT AREA: Au 3u" PAGE NOTE 4(OPTIONAL) 3.SOLDER AREA:Au 1u" MIN (DOUBLE FACE)	1SET
2	CONTACT	COPPER ALLOY C7025	1.Ni 50u" MIN OVERALL 2.CONTACT AREA: Au 3u" PAGE NOTE 4(OPTIONAL) 3.SOLDER AREA:Au 1u" MIN (DOUBLE FACE)	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK UL 94V-0	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

APPD. JM_Zheng
CHKD. LYX
DR. TSP





深圳市步步精科技有限公司

NAME:TYPE-C 16P 防水母座 板上四脚插 带柱 端子SMT
端子镀金3U 5A电流 L=7.85 CH=2.38 IPX7 带防水圈

PJ. NO.:UC.01.51-1W-0012
SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

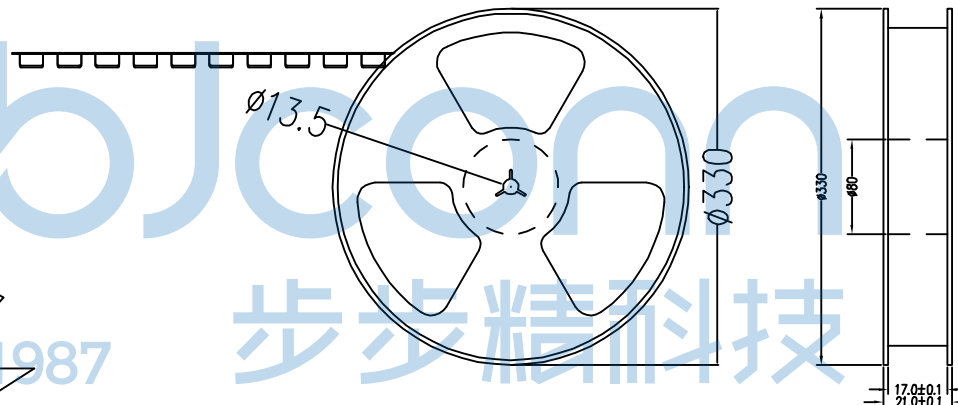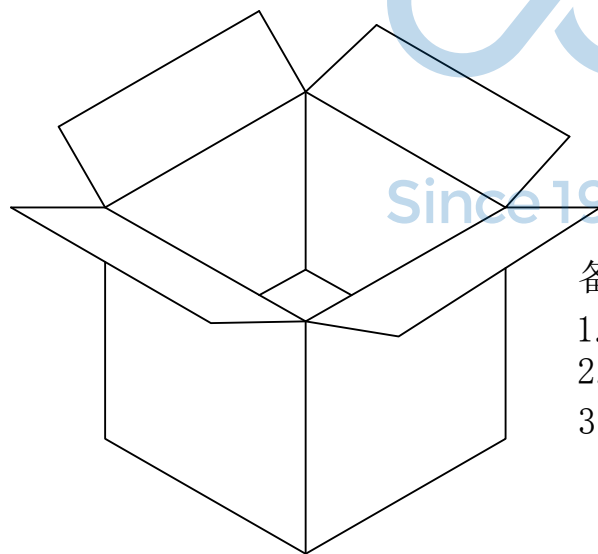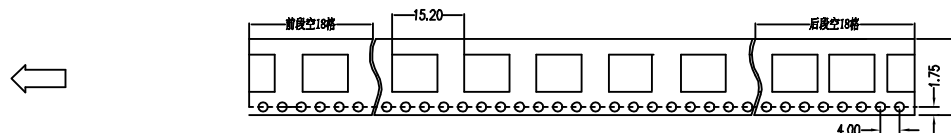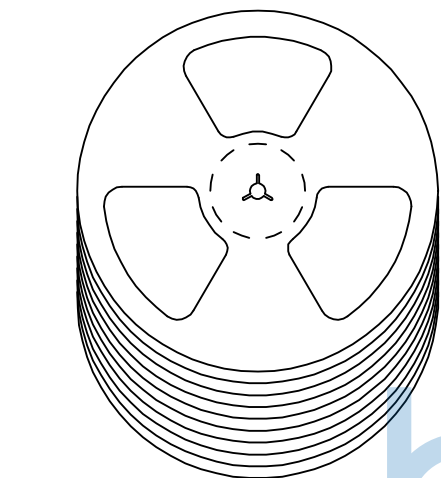

备注:

1. 包装数量: 600/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	NAME: TYPE-C 16P 防水母座 板上四脚插 带柱 端子SMT 端子镀金3U 5A电流 L=7.85 CH=2.38 IPX7 带防水圈	
APPD.	JM_Zheng	⊙	PJ. NO.: UC.01.51-1W-0012
CHKD.	LYX	SIZE: A4	DRW NO.:
PDWG.NO: 0523-1	DR. TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2