


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	TSP

Notes:

1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ∇ & $\blacktriangledown$ should be checked by Q.C. and process, engineers and ∇ should also check the CPK data.

Specification:

1. Current Rating: 5.0 AMP
2. Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30m Ω Max.
5. Insulator Resistance: 500M Ω Min. AT 250V DC.
6. Mating/Unmating cycles: 10000cycles
7. Temperature: -20 $^{\circ}$ C to +60 $^{\circ}$ C



A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
5	SHELL	STAINLESS STEEL	Ni/SN Plated	1PCS
4	SPRING	STAINLESS STEEL		1PCS
3	SHIELDING PLATE	STAINLESS STEEL	Ni Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0523-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 X'': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR TSP







NAME: TYPE-C 24P 防水母座 L=9.60 CH=0.35
沉板1.6 带耳 端子双排SMT IPX6

PJ NO: 126-221-240002-U9G

SIZE:A4 DRW NO:









FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/3

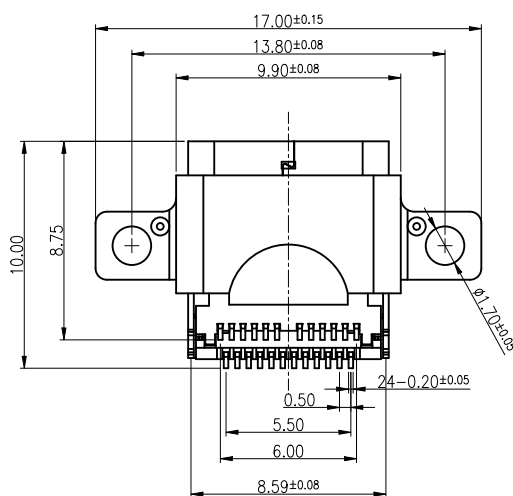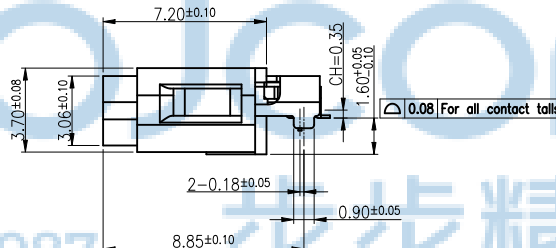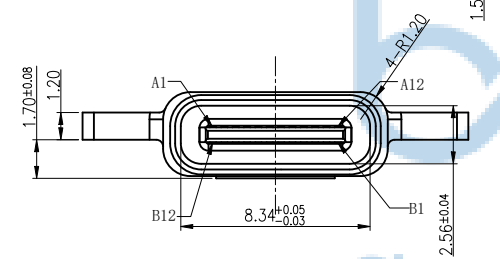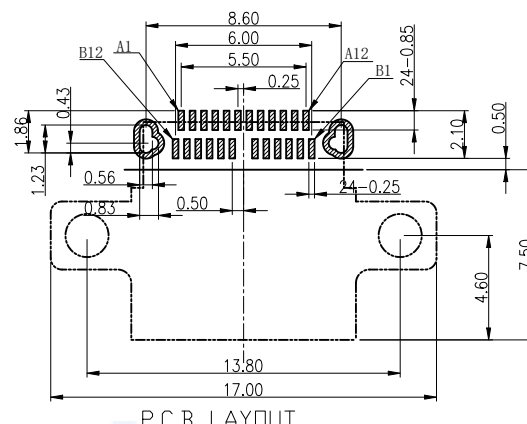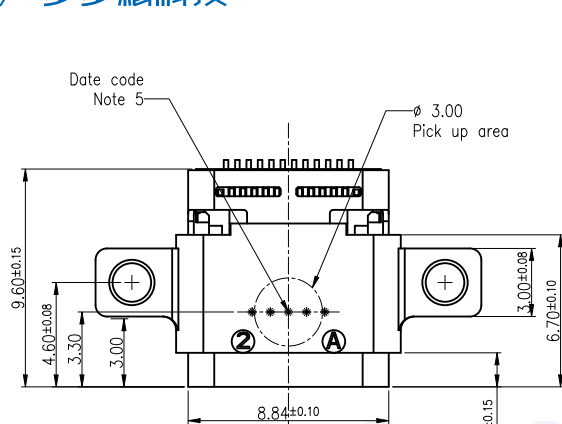



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	TSP

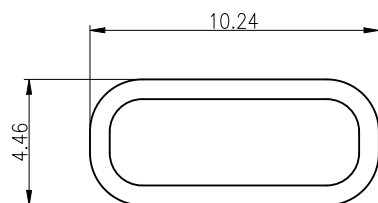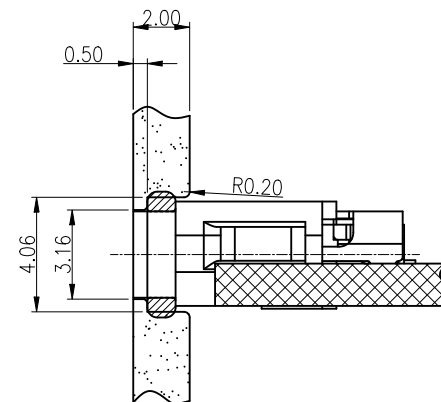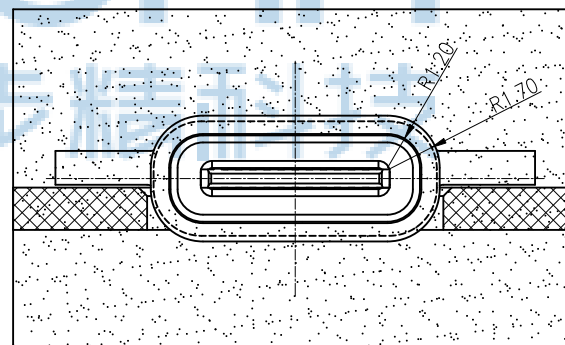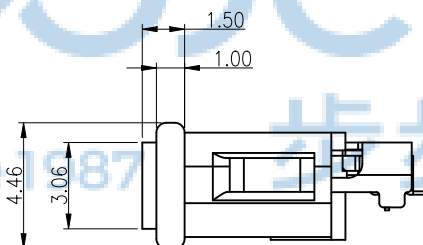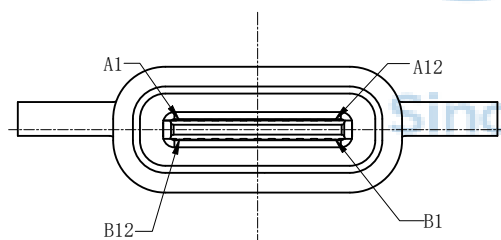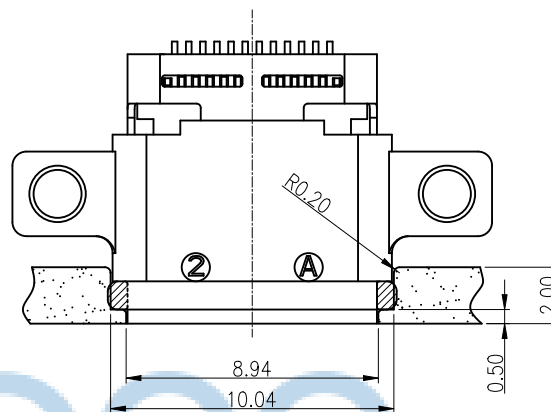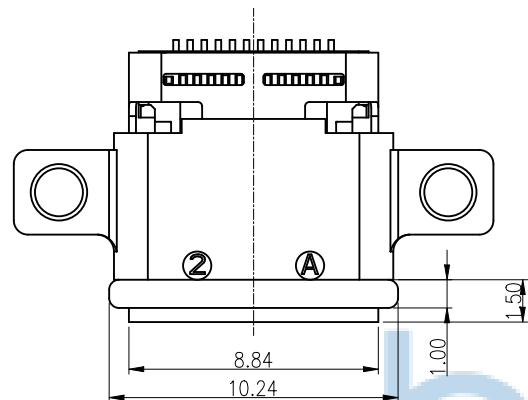

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0523-1

深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X*: ±3"
.X*: ±2"
.XX*: ±1"

NAME: TYPE-C 24P 防水母座 L=9.60 CH=0.35
沉板1.6 带耳 端子双排SMT IPX6

APPD JM_Zheng

CHKD LYX

DR

TSP

PJ NO:

SIZE:A4 DRW NO:


FINISH:SEE NOTES

SCALE:N/A

MAT'L:SEE NOTES

UNIT:mm

PAGE:2/3

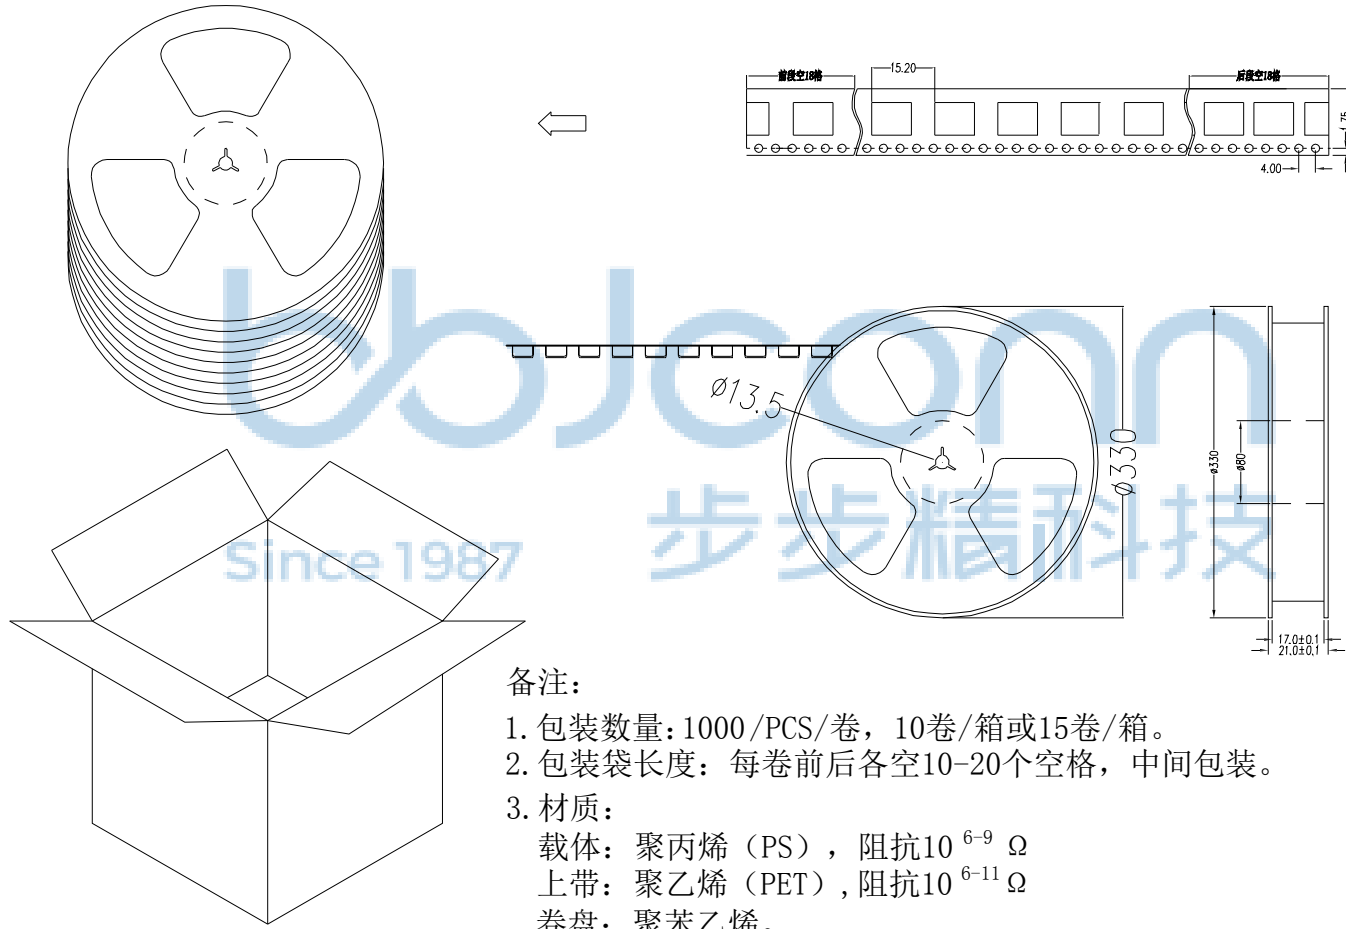

备注:

1. 包装数量: 1000 /PCS/ 卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) , 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET) , 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: TYPE-C 24P 防水母座 L=9.60 CH=0.35 沉板1.6 带耳 端子双排SMT IPX6	
				PJ NO:	
PDWG NO:0523-1		APPD	JM_Zheng	SIZE:A4	DRW NO:
		CHKD	LYX	FINISH:SEE NOTES	MAT'L:SEE NOTES
		DR	SGF	SCALE:N/A	REV: A0 UNIT:mm PAGE: 3/3