






REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

SPECIFICATION:

- Material & Finish: See the list;
- Mechanical:
 - Mating force: 5-20Nf;
 - Unmating force: Initial: 8-20Nf; Final: 6-20Nf;
 - Durability: 10000 Cycles;
- Electrical:
 - Current Rating:
 - VBus Pins: 5A, Vconn Pin: 1.25A, Other Pins: 0.25A;
 - Voltage Rating: 20V Max.;
 - Dielectric Withstanding voltage: 100Vac, 60S, 10mA;
 - Contact resistance: 40m Ohms Max.;
 - Insulation Resistance: 100M Ohms Min.;
- Environmental:
 - Operating temperature: -40°C ~ +85°C;
 - Salt Spray Test: 48H Min.;
 - Wetting Temperature: 265±5°C, 5±0.5s



PIN DEFINE TABLE			
PIN	SIGNAL	PIN	SIGNAL
A12	GND	B1	GND
A11	RX2+	B2	TX2+
A10	RX2-	B3	TX2-
A9	VBUS	B4	VBUS
A8	SBU1	B5	CC2
A7	D-	B6	
A6	D+	B7	
A5	CC1	B8	SBU2
A4	VBUS	B9	VBUS
A3	TX1-	B10	RX1-
A2	TX1+	B11	RX1+
A1	GND	B12	GND

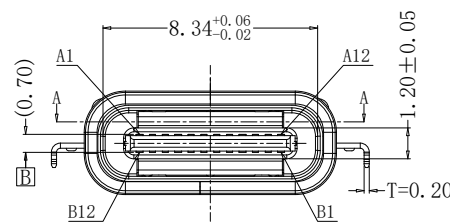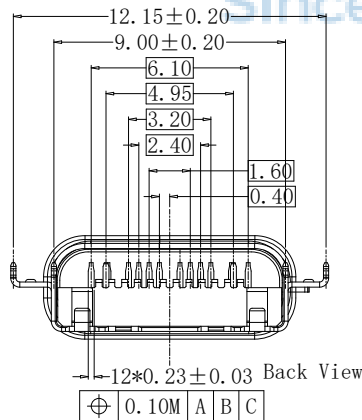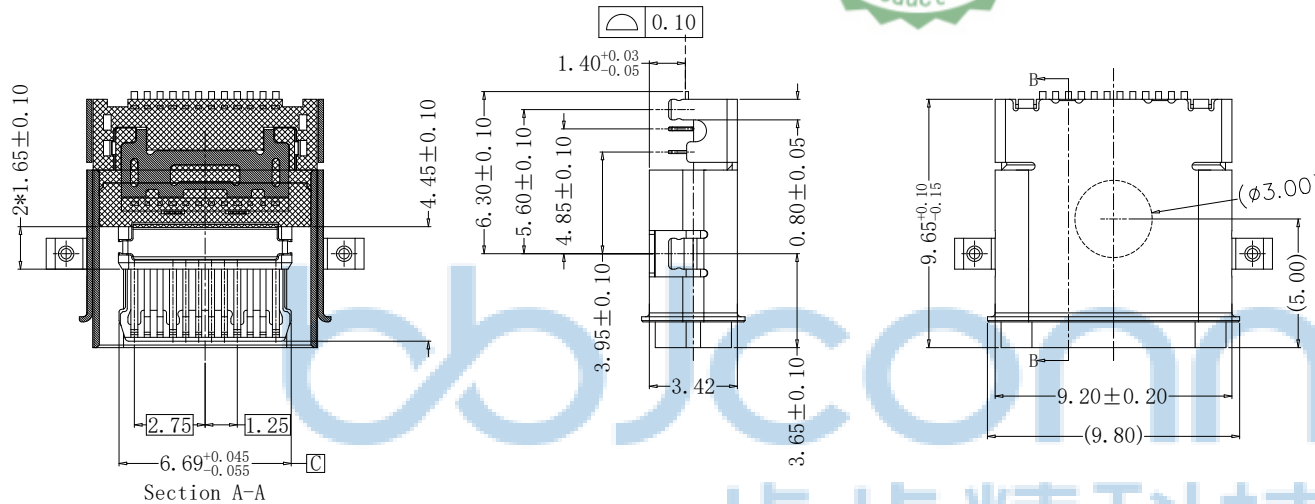



NO.	PART NAME	Q' TY	MATERIAL	FINISH
7	RUBBER RING	1	RUBBER	BLACK
6	Shell	1	SUS304-3/4H, T=0.20mm	50u"Ni Min.
5	INSIDE Shell	1	SUS316L, T=0.20mm	50u"Ni Min.
4	GroundBar	1	SUS301-H, T=0.12mm	No Plating
3	Down Contact	12	C7025, T=0.12mm	Aulu/50u"Ni Min.
2	Top Contact	12	C7025, T=0.12mm	Aulu/50u"Ni Min.
1	Housing	1	PA9T	UL 94 V-0

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG, NO: 0541-1

深圳市步步精科技有限公司		NAME: TYPE-C 24P 防水母座 外壳四脚DIP 端子SMT+DIP 沉板1.40 L=9.65 翻边 PA9T黑胶 IPX7 方型硅胶圈 绑带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" X'': ±2" XX': ±1"	P.J. NO.: 126-223-240003-X7G	SIZE: A4 DRW NO.:
APPD. JM_Zheng	CHKD. LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. GZY		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/3

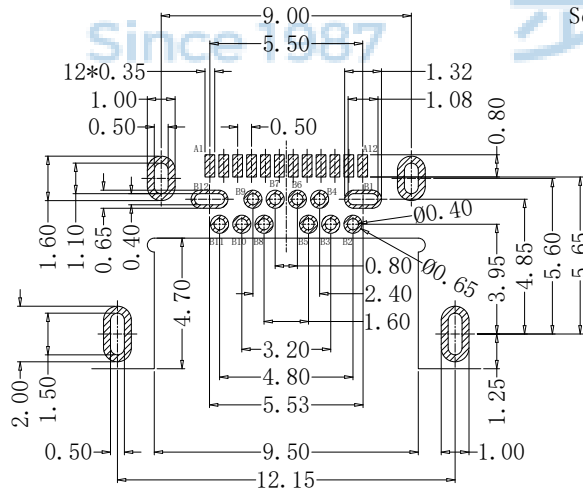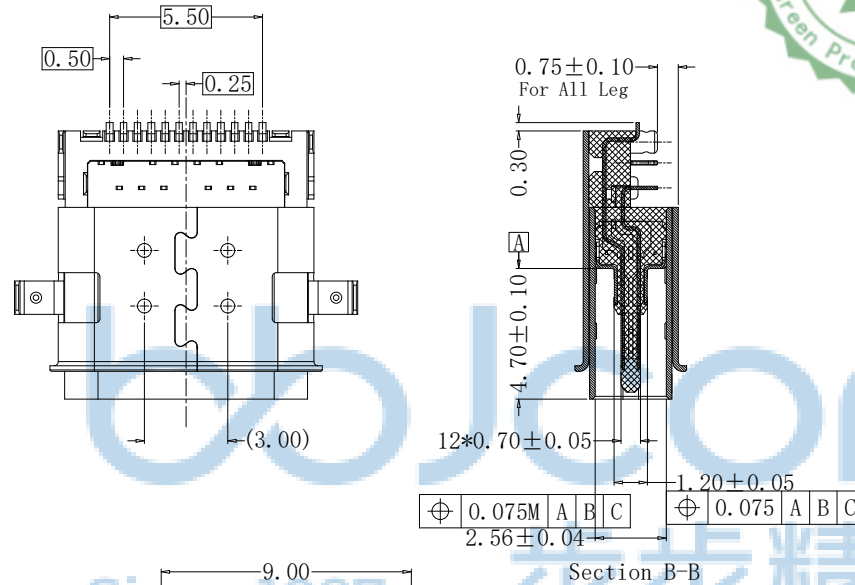

RECOMMENDED PCB LAYOUT, TOP VIEW
(THICKNESS=0.60MM; TOLERANCE: ± 0.05)

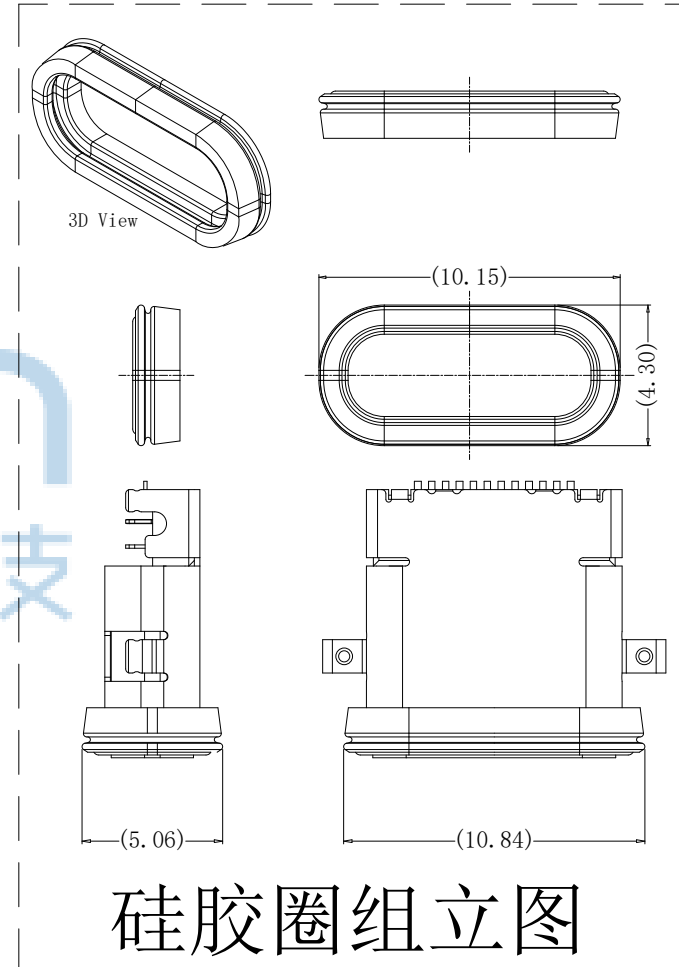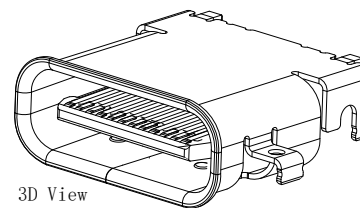

硅胶圈组立图

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

NAME: TYPE-C 24P 防水母座 外壳四脚DIP 端子SMT+DIP
沉板1.40 L=9.65 翻边 PA9T黑胶 IPX7 方型硅胶圈 编带

OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.







APPD.	JM_Zheng
CHKD.	LYX

	PJ. NO.: 126-223-240003-X7G	
	SIZE: A4	DRW NO.:

PDWG,NO: 0541-1

DR.	GZY
-----	-----

FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/3

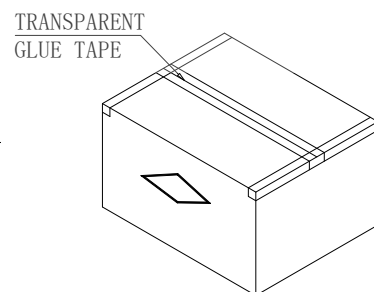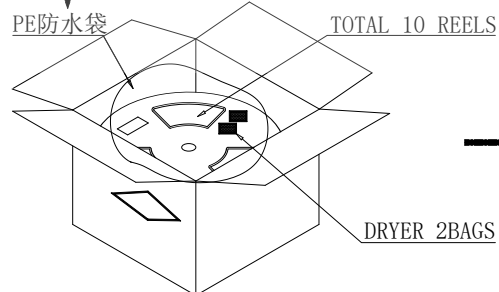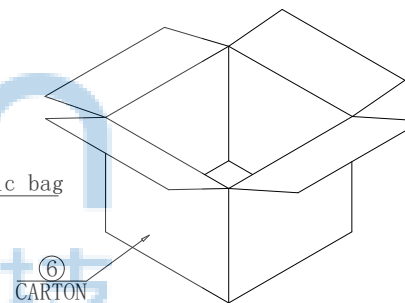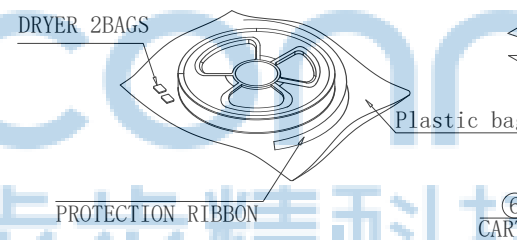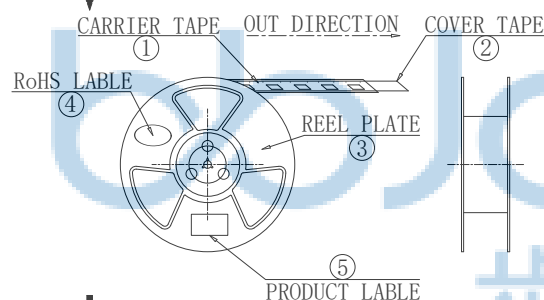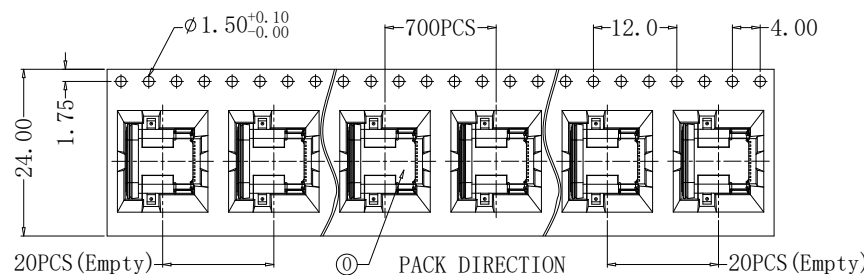

说明:

1. 每卷前后各空20PCS, 尾部用美纹胶纸封住;
2. 将产品放满盘后, 再卷一圈保护带, 用美纹胶纸将其封住, 并贴上1Pcs物料标签;
3. 每10卷盘一叠共7000Pcs并装入1个外箱内;
4. 在搬运过程中要轻拿轻放;
5. 在运输中不可堆放过多(1.8M最高), 不可重压;
6. 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a. 产品不可跑出下带凹槽;
b. 产品不可有摔伤, 变形;
c. 内包装材料不可严重破损.

NO.	NAME	SPEC	Q' TY
①	TYPE C RECEPTACLE		7000PCS/CARTON
①	CARRIER TAPE	W=24mm, T=0.40mm	700PCS/PLATE
②	COVER TAPE	W=21.3mm	10PLATES/CARTON
③	REEL PLATE	Ø330*100*24.4mm	10PCS/CARTON
④	RoHS LABEL		10PCS/CARTON
⑤	PRODUCT LABER		10PCS/CARTON
⑥	CARTON	350*340*310mm	1PCS/PACKAGE



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0541-1		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME: TYPE-C 24P 防水母座 外壳四脚DIP 端子SMT+DIP 沉板1.40 L=9.65 翻边 PA9T黑胶 IPX7 方型硅胶圈 编带	
	APPD.	JM_Zheng			PJ. NO.: 126-223-240003-X7G		
	CHKD.	LYX			SIZE: A4 DRW NO.:		
				FINISH: SEE NOTES		MAT'L.: SEE NOTES	
	DR.	GZY		SCALE: N/A	REV.: A0	UNIT: mm PAGE: 3/3	