

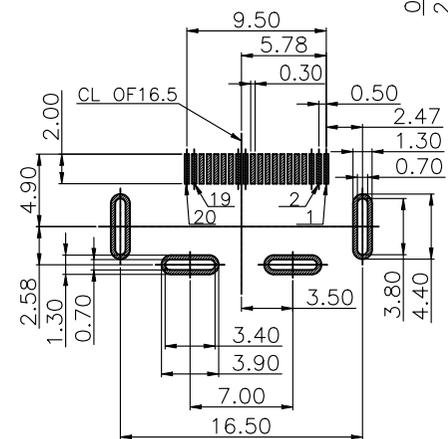
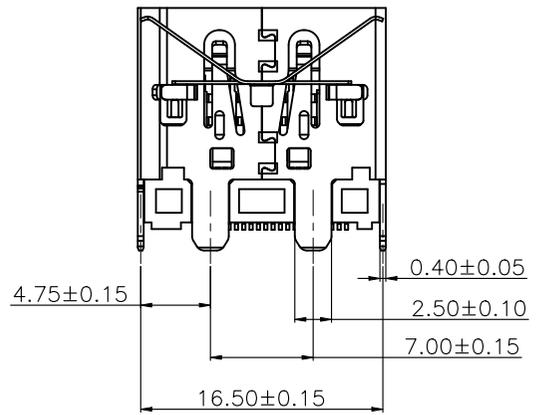
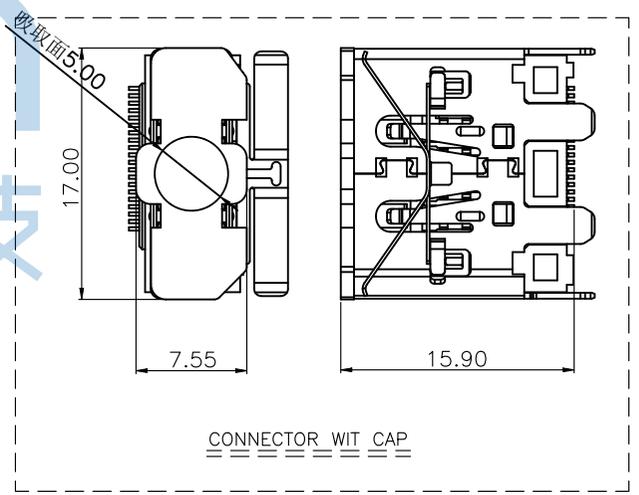
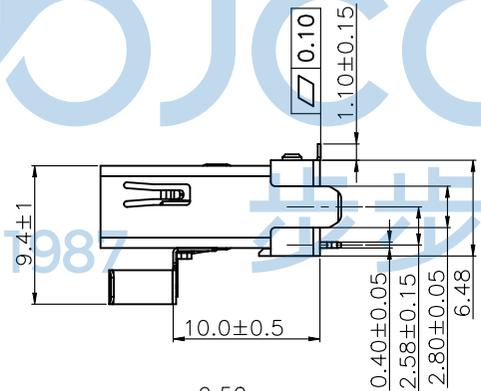
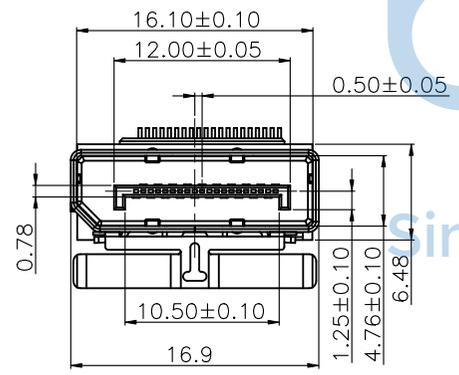


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP



MATERIALS
 1.HOUSING:LCP, (UL 94V-0), BLACK
 2.TERMINAL:BRASS (C2680),
 GOLD PLATING 15u" Min. ON CONTACT AREA,
 MATTE TIN 80u" Min. PLATING ON SOLDER TAIL,
 UNDER NICKEL PLATING 50u" Min. OVER ALL.
 3.SHELL:S50C/BRASS(C2680), NICKEL PLATING 50u" Min.
 4.SPRING:SUS304,CLEANING.





SPECIFICATION
 1.CURRENT RATING : 0.5 A MAX.
 2.DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S.
 FOR ONE MINUTE.
 3.INSULATION RESISTANCE : 100M OHMS MIN.
 4. CONTACT RESISTANCE : 30m OHMS MAX.
 5. OPERATING TEMPERATURE : -20°C TO +85°C.
 6. INSERTION FORCE : 4.5kgf MAX.
 7. EXTRACTION FORCE : 1.0~4.0kgf MIN.
 8. SALT SPRAY : 24 HOURS PASS.
 9. REFLOW SOLDERING(SMD COMPONENT) OVEN
 10.TEMPERATURE:260°C.5SEC

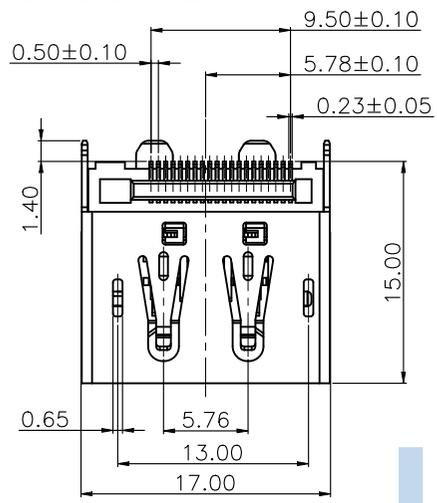

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCE: ±0.05




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 APPD. JM_Zheng CHKD. LYX DR. TSP		NAME: DP 20P 母座 180度 四脚插 端子SMT 外壳脚长1.4 反向弹片 H=15.0 平口 铜壳 编带 PJ. NO.: 158-224-200001-U4G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
PDWG.NO:	0470-1				

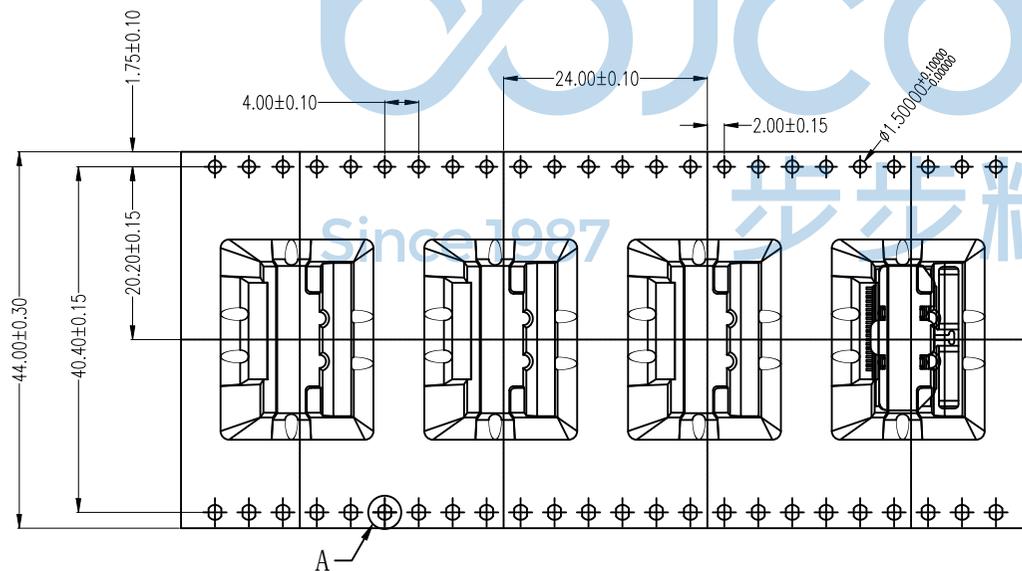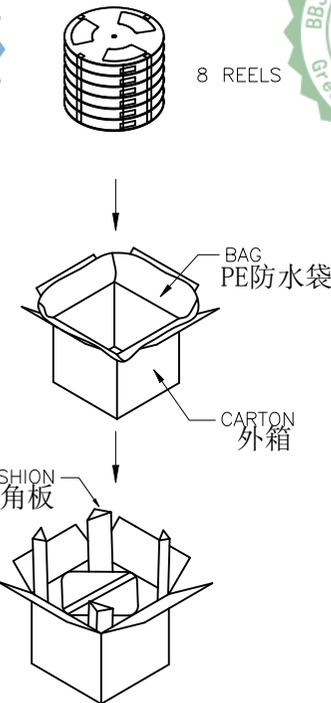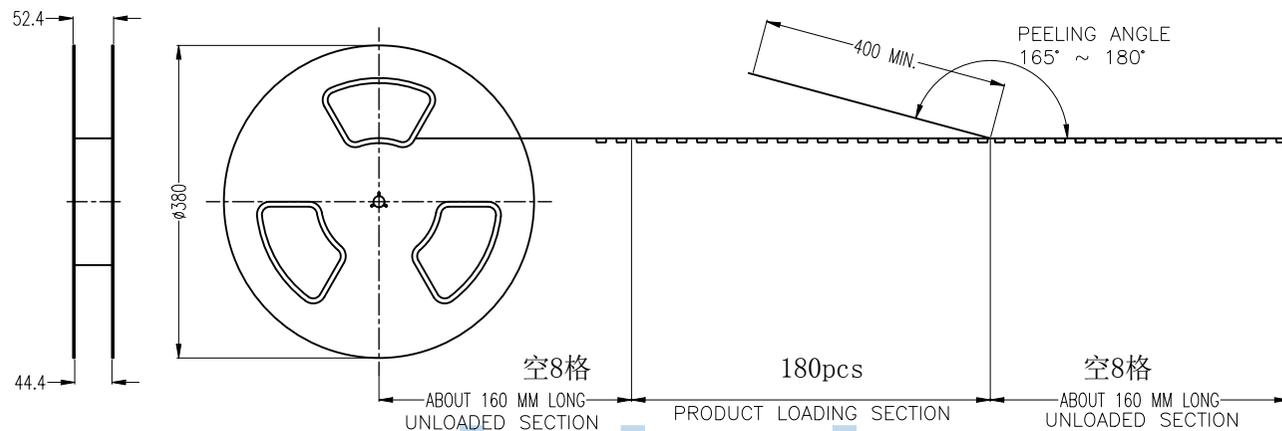


PACKAGE

- SIZE :
REEL : DIA.=380mm
CORTON : 400x400x400mm (LxWxH)
- QUANTITY :
180 PCS/REEL
8 REELS/CARTON : 1440PCS



DETAIL A
10:1

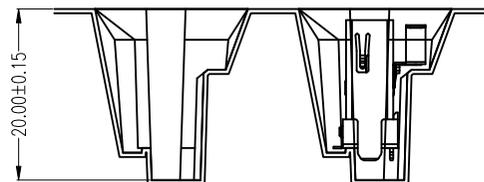

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: DP 20P 母座 180度 四脚插 端子SMT 外壳脚长1.4 反向弹片 H=15.0 平口 铜壳 编带 APPD. JM_Zheng CHKD. LYX DR. TSP	
PDWG.NO: 0470-1		PJ. NO.: 158-224-200001-U4G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2			