

Precautions:

1. Materials:



- 1.1 Insulator: LCP (E130i), UL94V-0, color: black.
- 1.2 Contact: Brass (C-18400-R540).
- 1.3 Housing: SUS304.

2. Finish:




- 2.1 Contact: The contact area is gold plated with 5U ", and the pad area is gold plated with flashing light (minimum 0.3m), 30 meter minimum nickel coating.
 - 2.2 Shell: Minimum 30m ", overall nickel plated.
3. Salt spray test: 8 hours for welding tail and 48 hours for shell.

4. Compatibility with DISPLAYPORT 2.0 version.

5. Material number Description

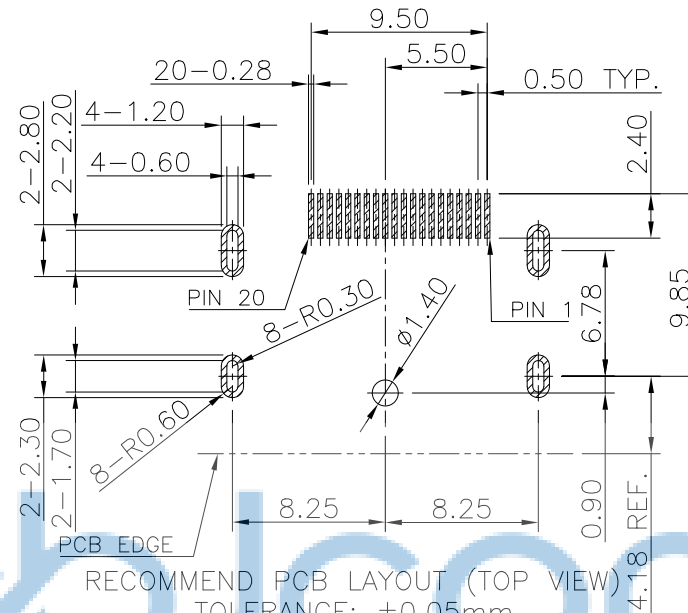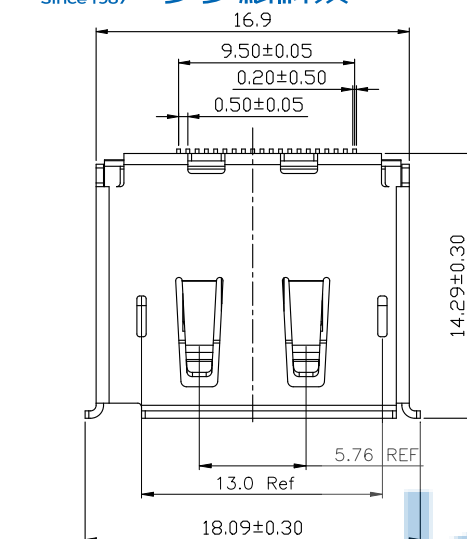


RECOMMEND PCB LAYOUT (TOP VIEW)
TOLERANCE: ±0.05mm

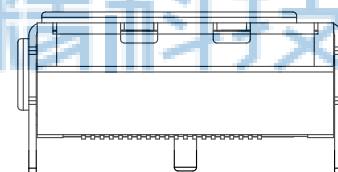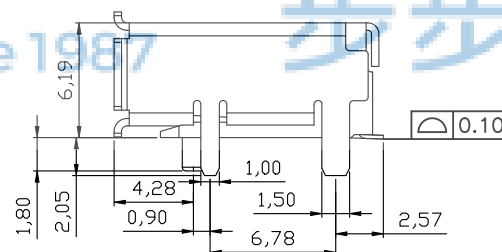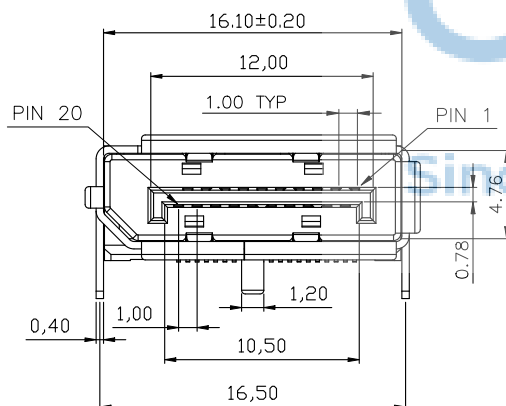

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0602-1


深圳市步步精科技有限公司		NAME: DP 2.1 20P 母座 90度 四脚插 带柱 L=14.29 导高H=1.80 端子SMT 无螺丝孔 卷边 LCP黑胶 不锈钢外壳	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	APPD. JM_Zheng	PJ. NO.:
CHKD. LYX	DR. TSP	SIZE: A4	DRW NO.:
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

PACKING DRAWING:




283


NO.1 60 PCS/ TRAY



NO.2 18 TRAY/ BUNDLE



NO.3 2 BUNDLE/ PE BAG/ CARTON



NO.4 2160 PCS/ CARTON



	P.J. NO.:		
	SIZE: A4	DRW NO.:	
FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A	REV: AO	UNIT: mm	PAGE: 2/2