



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	WYY

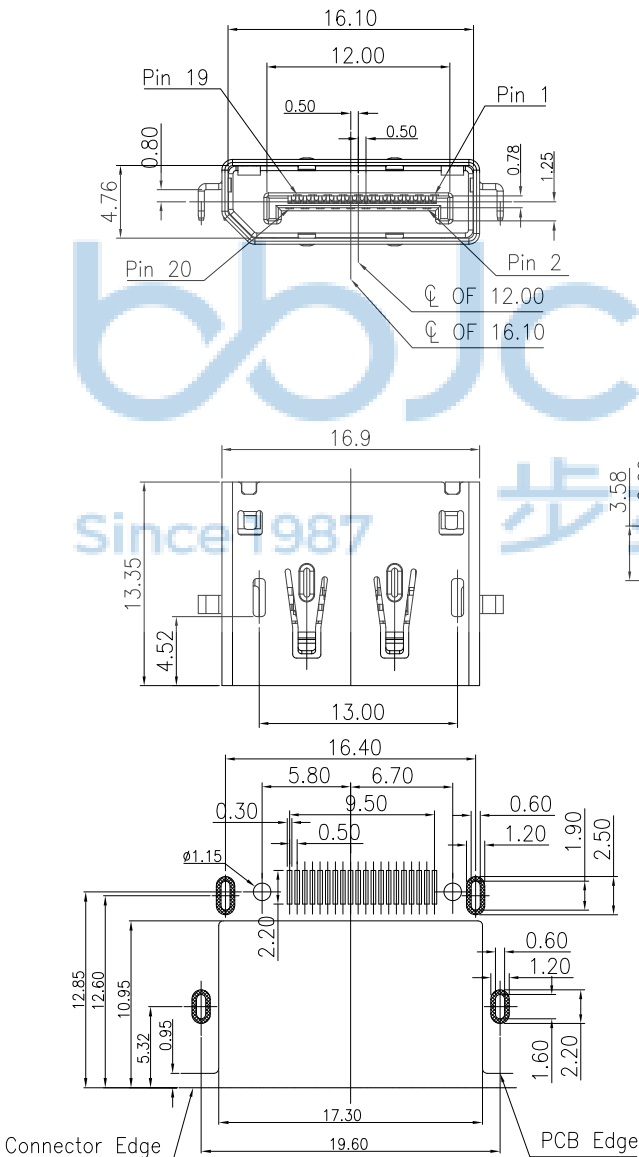

RECOMMENDED PCB LAYOUT
(THICKNESS=1.60±0.05mm)



NOTE:

A. MATERIAL:

1. Housing: LCP(HF) UL94V-0 Black
2. Contact: Copper Alloy
3. Shell: Steel

B. PLATING:





1. Contact: Contact Area Gold Plated
Solder Area Sn Plated
Under Plated Nickel
2. Shell: Nickel Plated

C. SPECIFICATION:

1. Current: 0.5A
2. Voltage: 40V RMS
3. Withstanding Voltage: 500V AC
4. Contact Resistance: $\Delta R=30 \text{ m}\Omega$ max. (Contact)
 $\Delta R=50 \text{ m}\Omega$ max. (Shell)
5. Insulation Resistance: 100 M Ω min.
6. Temperature Range: -20 to +85
7. Mating And Unmating Force:
 - 7.1 Mating Force: 4.5Kgf(44.1N)Max.
 - 7.2 Unmating Force: 1.0Kgf~4.0Kgf(9.8N~39.2N)
8. Durability: 10000 Cycles



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程部		NAME: DP 母座 沉板3.58 四脚插 带柱 L=13.35 LCP黑胶 平口 铜壳 SMT	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		PJ. NO.: 158-221-200001-T1G SIZE: A4 DRW NO.:	
APPD. JM_Zheng		CHKD. LYX		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0006-1		DR. WYY		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1	

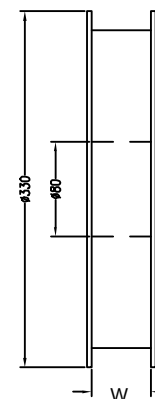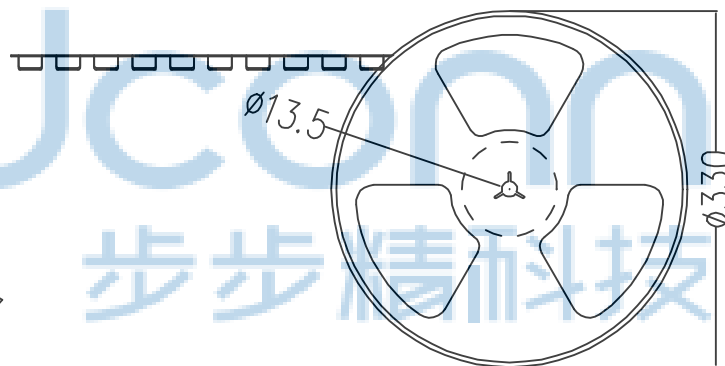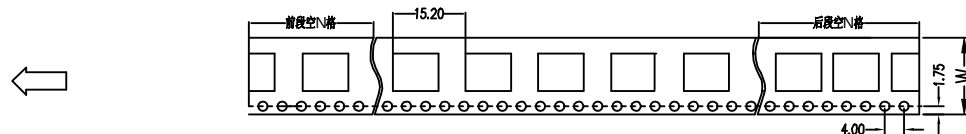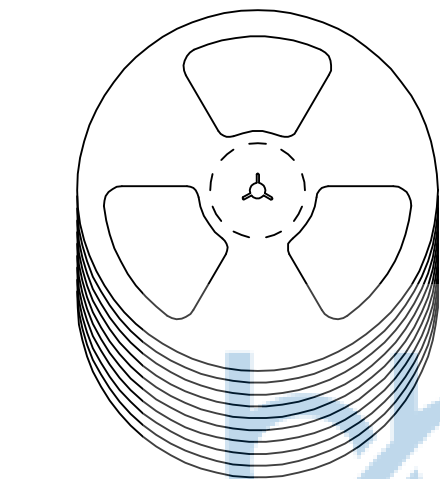

备注:

1. 包装数量：650/PCS/卷，10卷/箱。
2. 包装袋长度：每卷前后各空10-20个空格，中间包装。
3. 材质：
载体：聚丙烯（PS），阻抗 $10^{6-9} \Omega$
上带：聚乙烯（PET），阻抗 $10^{6-11} \Omega$
卷盘：聚苯乙烯。

纸箱规格：345*345*230MM

纸箱规格：345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0006-1		深圳市步步精科技有限公司				
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X'': ±2' XX': ±1'		
	NAME: DP 母座 沉板3.58 四脚插 带柱 L=13.35 LCP黑胶 平口 铜壳 SMT				PJ. NO.: 158-221-200001-T1G	
	SIZE: A4 DRW NO.:					
	FINISH: SEE NOTES MAT'L.: SEE NOTES					
SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2						