
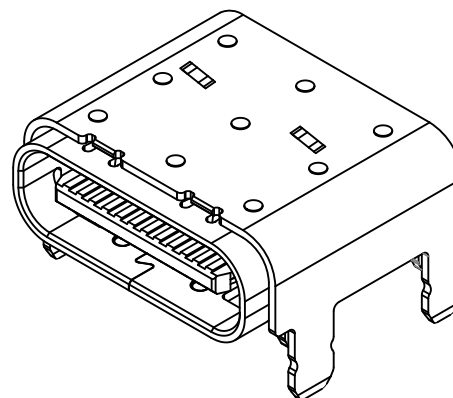
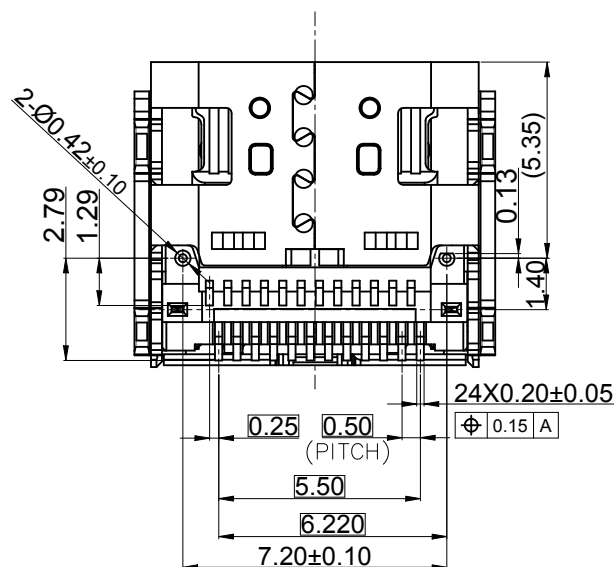
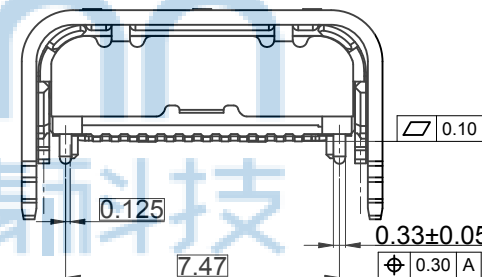
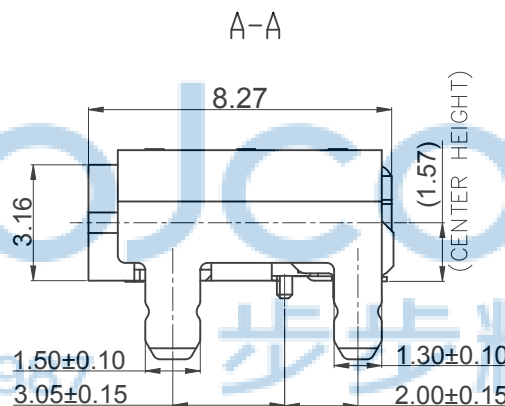
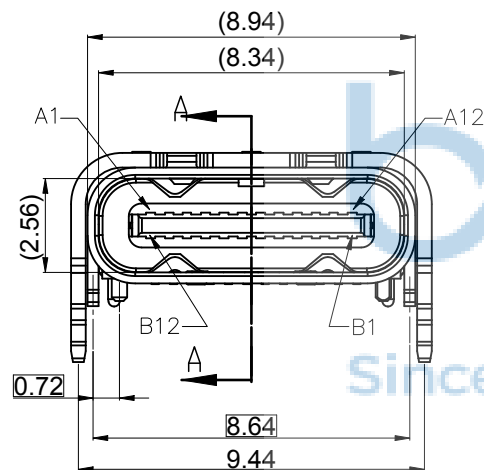
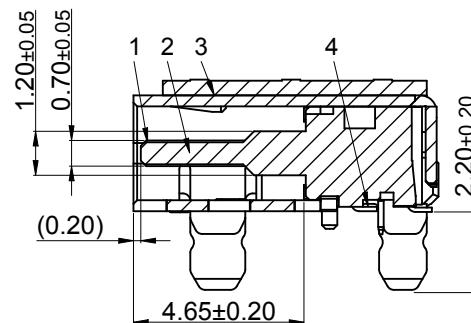


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTE/注度:

1. SPECIFICATION/规格:

- 1.1 Rated current (额定电流) : 5.0 A
- 1.2 Voltage rating (额定电压) : 5V AC
- 1.3 Contact Resistance (接触阻抗) : 40 m Ω Max.
- 1.4 Insulation Resistance (绝缘阻抗) : 100M Ω Min.
- 1.5 Withstanding voltage (耐电压) : 100 VAC/minute
- 1.6 Mating force (插入力) : 5~20N .
- 1.7 Unmating force (拔出力) : 8~20N.
- 1.8 Durability Cycle(寿命循环):10,000 cycle
- 1.9 Operating temperature (工作温度) : -40°~+85°

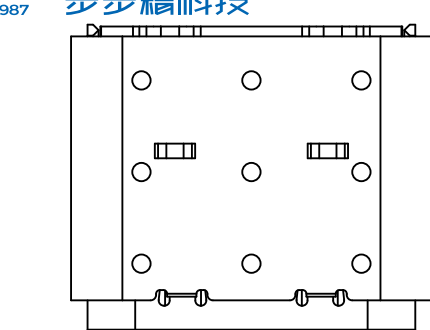

4	TERMINAL	24	C18140	MATING SIDE:SEE PART NO; SOLDER TAIL:Gold FLASH, 50u" NICKEL OVERALL.	T=0.12
3	SHELL	1	SUS304	NICKEL PLATING	T=0.30
2	MID PLATE	1	SUS301	NICKEL PLATING	T=0.15
1	MAIN HOUSING	1	PA9T HF 30%玻纤, UL94 V-0, 黑色		BLACK UL94V-0
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARK

BILL OF MATERIAL

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0470-1




深圳市步步精科技有限公司

.X: ± 0.38
.XX: ± 0.25
.XXX: ± 0.13

X': ± 3
X'': ± 2
X'X': ± 1

NAME: U4 40G速率 TYPE-C 24P 母座 有后盖 双壳 双排
SMT 板上四脚插 带柱 外壳脚长2.20 L=8.27 CH=1.57 编带

APPD. JM_Zheng
CHKD. LYX
DR. TSP
PJ. NO.: 126-221-240017-U4G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3

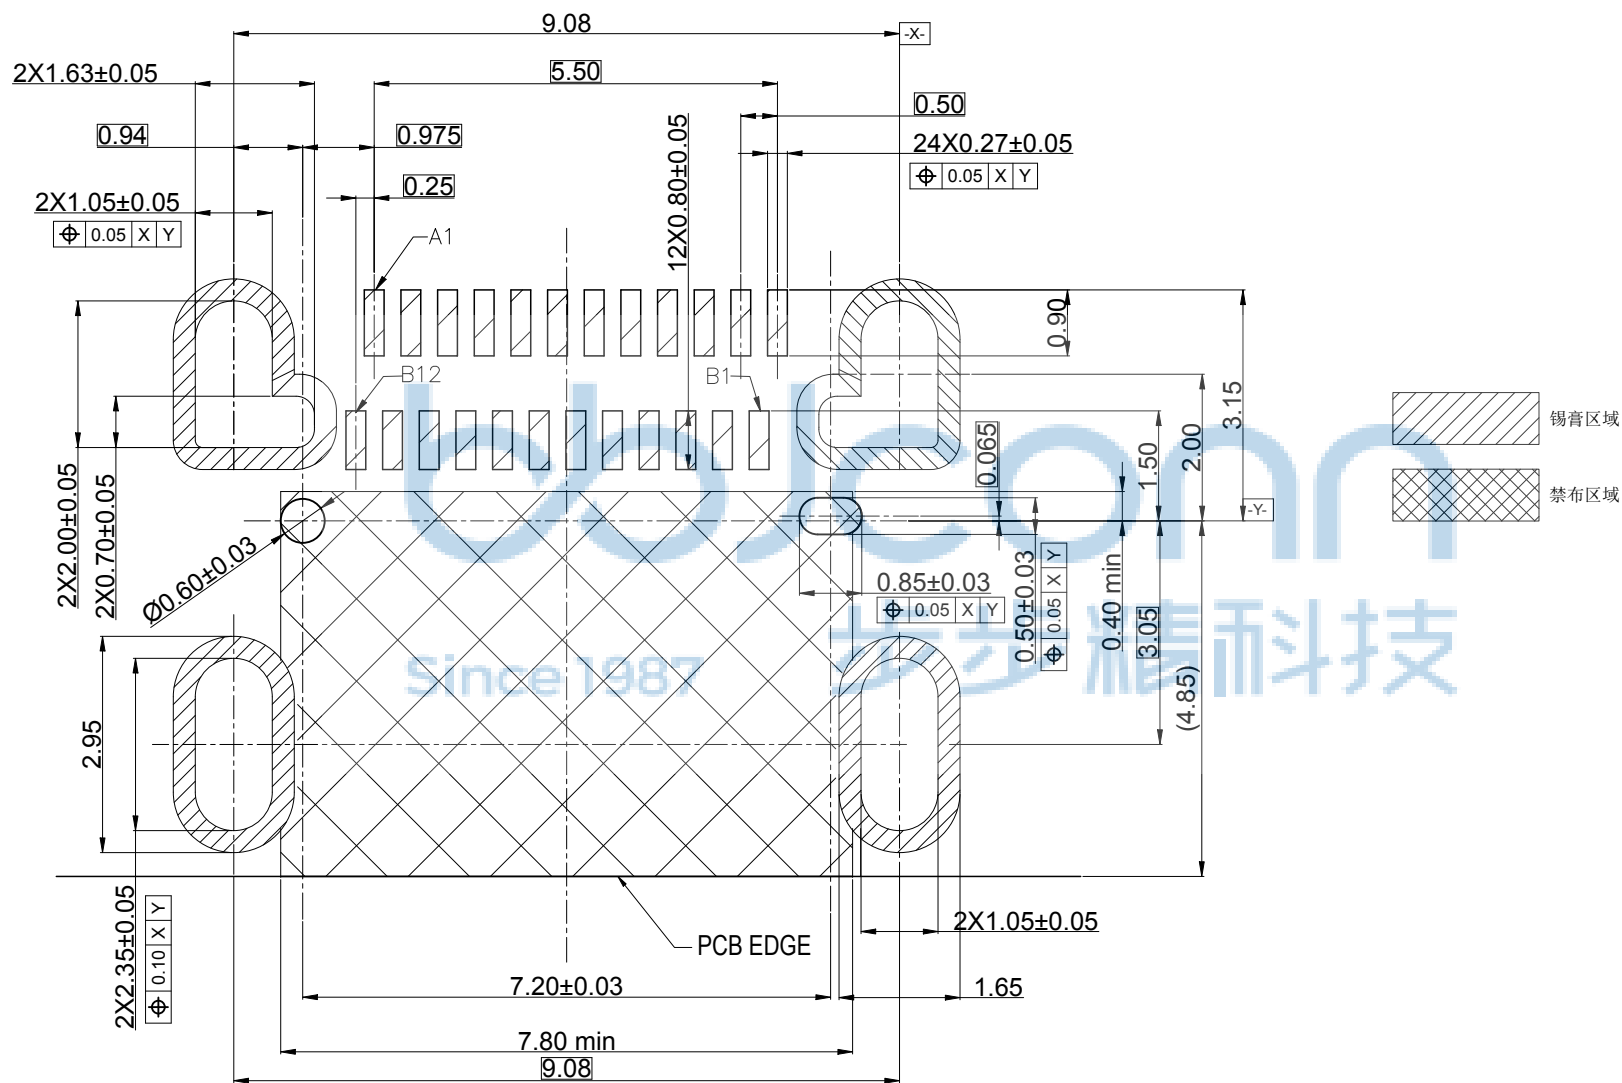

PIN ASSIGNMENT:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1−	Vbus	CC1	D+	D−	SBU1	Vbus	RX2−	RX2+	GND
GND	RX1+	RX1−	Vbus	SBU2	D−	D+	CC2	Vbus	TX2−	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE




深圳市步步精科技有限公司



.X: ±0.38 X*: ±3" .XX: ±0.25 .X*: ±2" .XXX: ±0.13 .XX*: ±1"		NAME: U4 40G速率 TYPE-C 24P 母座 有后盖 双壳 双排 SMT 板上四脚插 带柱 外壳脚长2.20 L=8.27 CH=1.57 编带			
APPD.	JM_Zheng		PJ. NO.: 126-221-240017-U4G		
CHKD.	LYX		SIZE: A4	DRW NO.:	
DR.	TSP	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/3



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

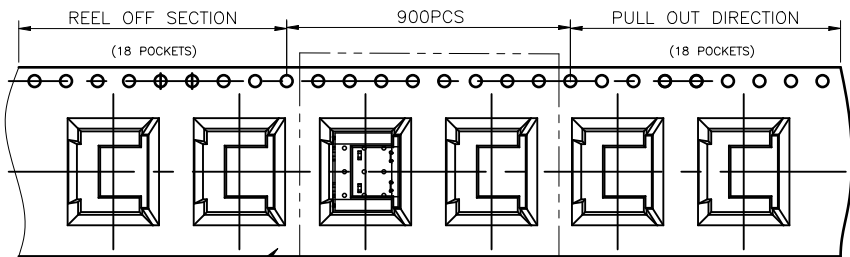

SEE DETAIL X

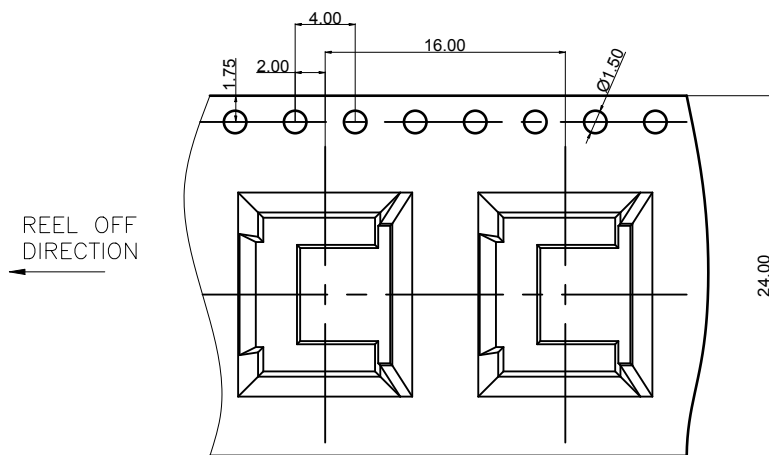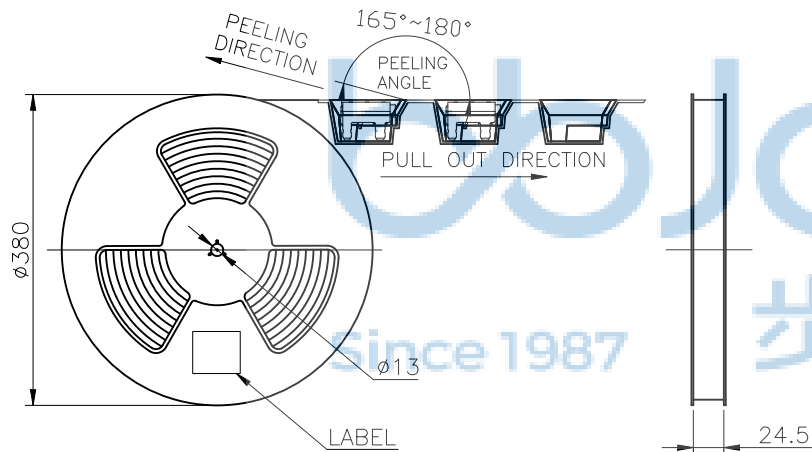


PAPER BOARD

REEL AND TAPE

REEL AND TAPE

PAPER BOARD

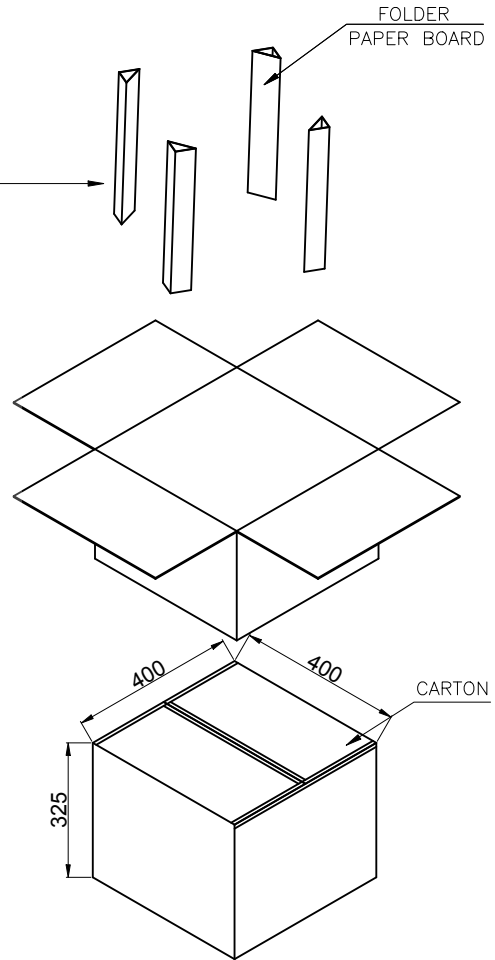

	REEL	CARTON
CONNECTOR (PCS)	900	9000

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

 深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
NAME: U4 40G速率 TYPE-C 24P 母座 有后盖 双壳 双排 SMT 板上四脚插 带柱 外壳脚长2.20 L=8.27 CH=1.57 编带			
APPD.	JM_Zheng		PJ. NO.: 126-221-240017-U4G
CHKD.	LYX		SIZE: A4 DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
SCALE: N/A		REV.: A0	UNIT: mm PAGE: 3/3