
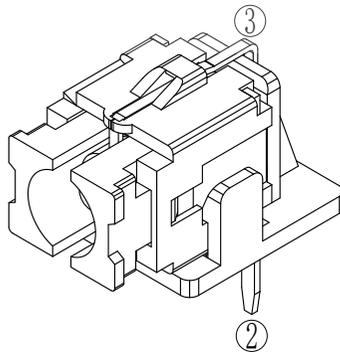
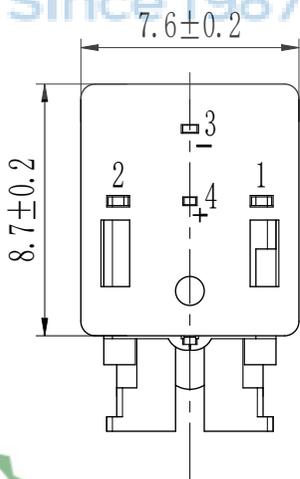


灯光选型表


灯光	灯光代码
白光	W white
红光	R Red
绿光	G Green
黄光	Y Yellow
蓝光	B blue
...	...

Since 1987

步步精科技

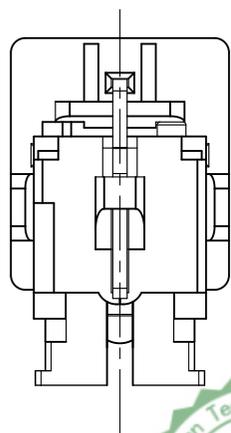

电原理图



序号	名称	材料	数量	镀层/颜色	备注
6	LED 灯		1	透明	A0670蓝光长负短正
5	按钮	PA66	1	瓷白	
4	弹片	不锈钢	1	Ag	
3	塑座	PA66	1	黑色	
2	定位板	PA66	1	黑色	
1	卡件	H62	1	Ag	



带灯轻触主要技术指标: Llluminated Tact Switch Main Specifications:

气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength	绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist. Test
-25℃ 至 +75℃	30V DC, 30mA	≤0.05 Ω	250V AC	≥100M Ω	▶260gf±50gf	10W times	12±1 hours.
-25℃ 至 +75℃	30V DC, 30mA	≤0.05 Ω	250V AC	≥100M Ω	160gf±50gf	10W times	12±1 hours.

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME: 轻触开关 7.6X8.7X12 侧插 单色白灯 L=12.0 四脚DIP 带柱 不锈钢弹片 260gf

APPD. JM_Zheng

PJ. NO.:

CHKD. LYX

SIZE: A4 DRW NO.:

PDWG.NO: 0436-1


DR. GZY

FINISH: SEE NOTES MAT'L.: SEE NOTES


SCALE: N/A REV.: AO UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

PE袋规格: 260*185

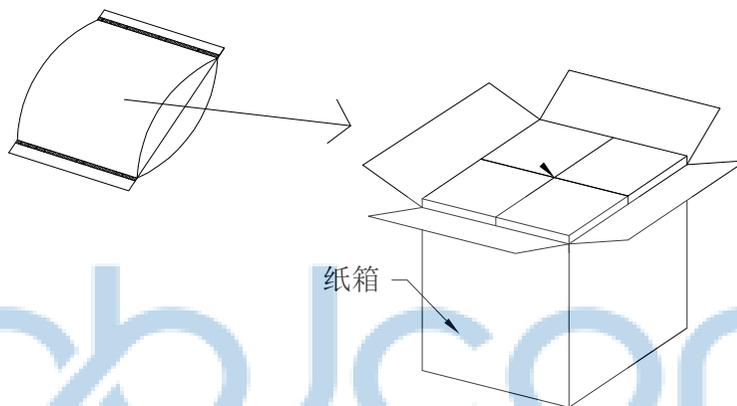

成品标签



1. 包装要求:
- 1.1 每个PE袋包装200pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计4000pcs;
 - 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
PDWG.NO: 0436-1		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'
APPD.	JM_Zheng	NAME: 轻触开关 7.6X8.7X12 侧插 单色白灯 L=12.0 四脚DIP 带柱 不锈钢弹片 260gf 袋装	
CHKD.	LYX	PJ. NO.: 901-431-193001-T9G	
DR.	GZY	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	