
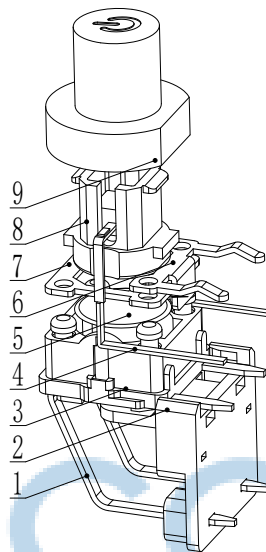
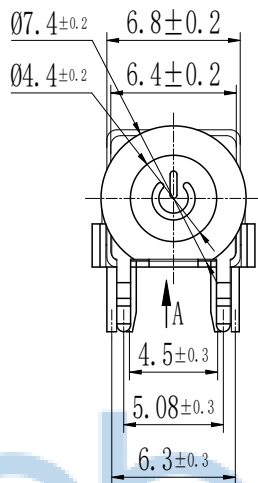


REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	LHC


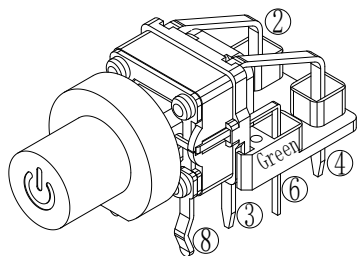


带灯轻触主要技术指标: Illuminated Tact Switch Main Specifications:


气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength	绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist Test
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	260gf±50gf	10W times	12±1 hours.
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	160gf±50gf	10W times	12±1 hours.

灯光选型表


双色灯光	灯光代码	电原理图
红/蓝双色光(宽脚红)	R1/BL1 Red/Blue	
红/纯绿双色光(宽脚红)	R1/G1 Red/PureGreen	
红/白双色光(宽脚红)	R1/W1 Red/White	
绿/蓝双色光(宽脚绿)	G1/BL1 Green/Blue	
绿/白双色光(宽脚绿)	G1/W1 Green/White	
黄绿/红双色光(宽脚黄绿)	YG1/R1 yellow green/red	
黄/纯绿双色光(宽脚黄)	Y1/G1 yellow/Pure green	
....		..

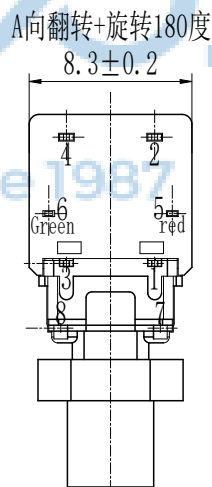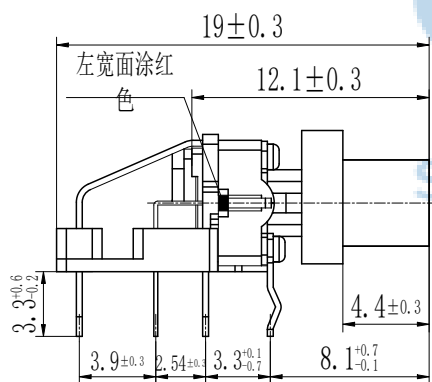

元件面孔位图

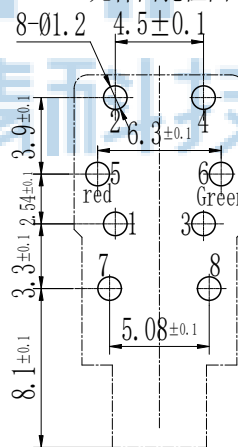

电原理图



注: 综合图-动作力和灯光按客户要求定制, 产品型号随之而变。

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.




深圳市步步精科技有限公司

NAME: 轻触开关 8.3x19 侧插 八脚插 红蓝双色灯 带镭雕 不锈钢弹片 260GF 透白圆帽 平头 瓷白按钮	PJ NO:
SIZE:A4	DRW NO:
FINISH:SEE NOTES	MAT'L:SEE NOTES
SCALE:N/A	REV:A0
UNIT:mm	PAGE:1/2

PDWG NO: 0436-1

DR LHC

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LHC

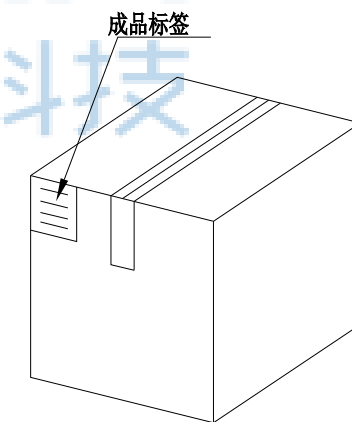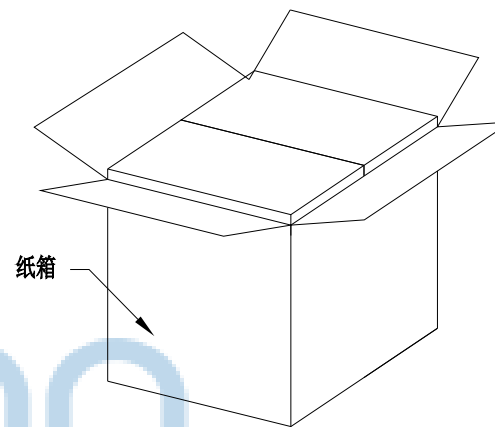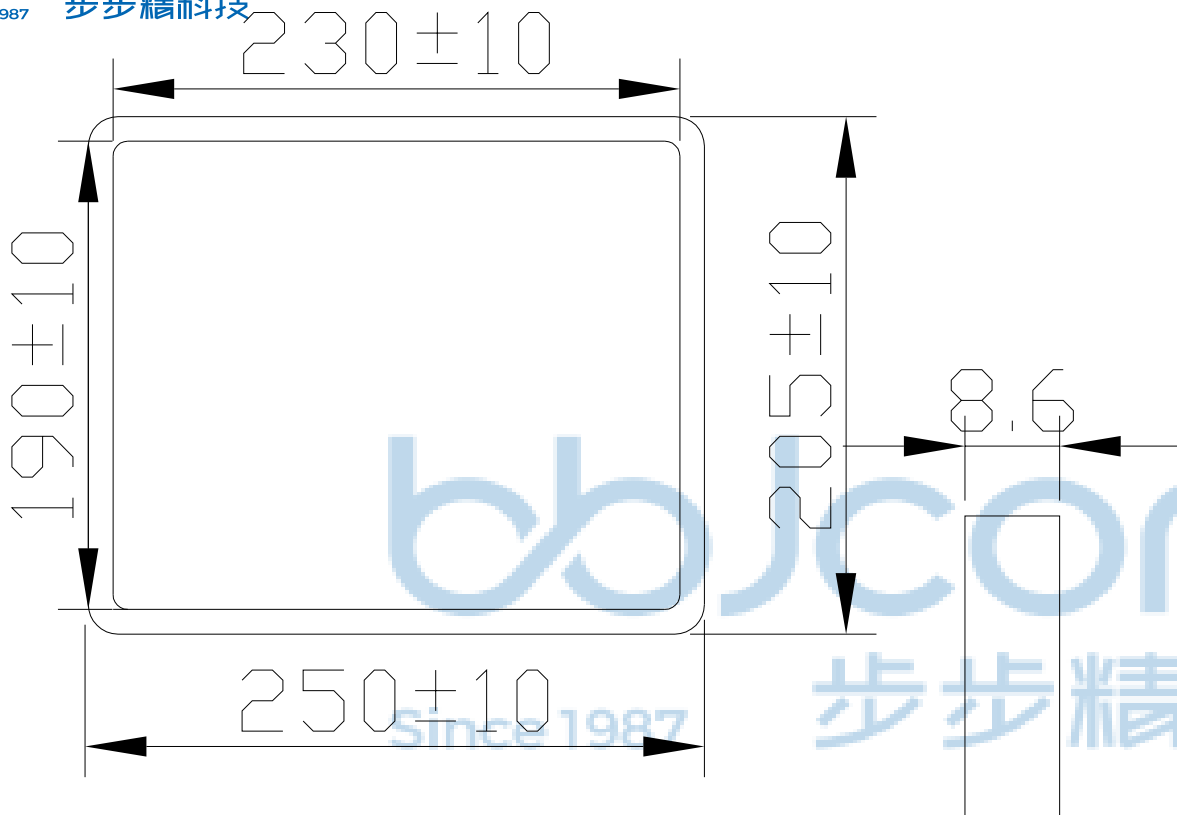

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装216pcs;
- 1.2 每20盘放一箱, 共计4320PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.			深圳市步步精科技有限公司					
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: 轻触开关 8.3x19 侧插 八脚插 红蓝双色灯 带锚 雕 不锈钢弹片 260GF 透白圆帽 平头 瓷白按钮			
	APPD	JM_Zheng		PJ NO:				
	CHKD	LYX		SIZE:A4	DRW NO:			
	PDWG NO: 0436-1	DR	LHC	FINISH:SEE NOTES		MAT'L:SEE NOTES		
			SCALE:N/A	REV:A0	UNIT:mm	PAGE: 2 / 2		