

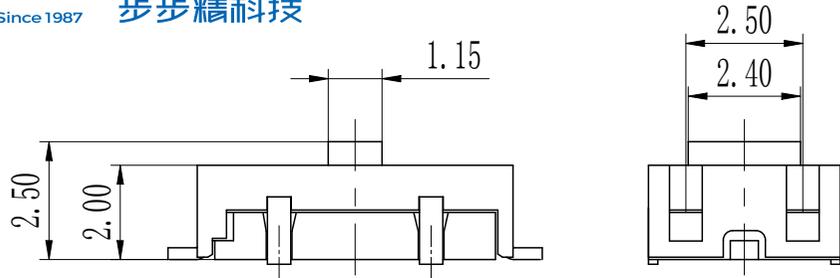
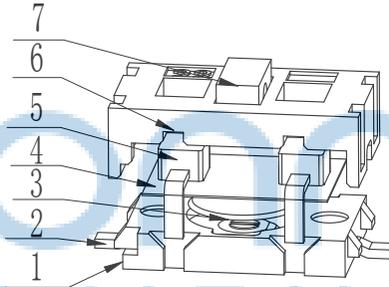


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO		Initial release	/	TSP

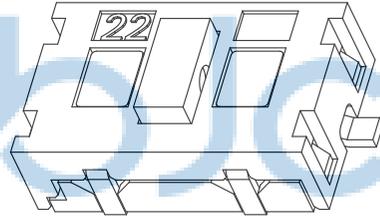

轻触开关主要技术指标: Main Specifications:

气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength	绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist. Test
-25℃ 至 +75℃	30V DC, 30mA	≤0.05 Ω	250V AC	≥100M Ω	260gf±50gf	10W times	12±1 hours.
-25℃ 至 +75℃	30V DC, 30mA	≤0.05 Ω	250V AC	≥100M Ω	160gf±50gf	10W times	12±1 hours.

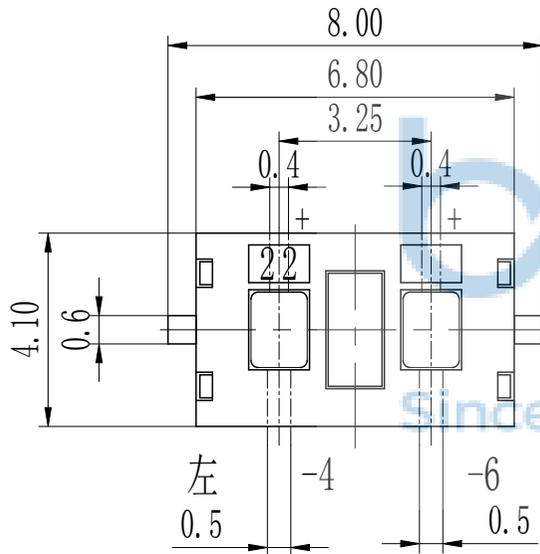


灯光选型表


双色灯光
左白/右蓝
左红/右绿
左白/右红
左绿/右蓝
左蓝/右蓝
左绿/右黄
....



电原理图



元件面孔位图




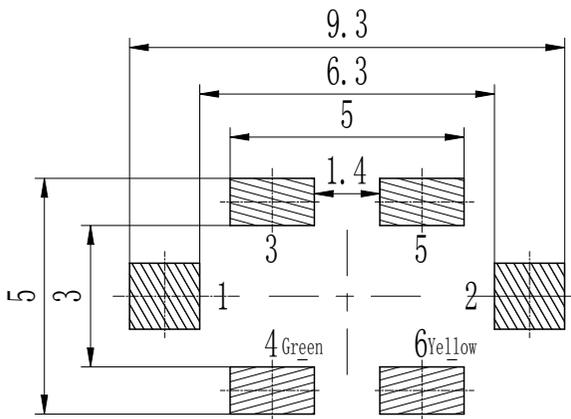


序号	名称	材料	数量	镀层/颜色	备注
7	按钮	LCP	1	瓷白	
6	塑盖	PPA	1	瓷白	
5	LED 灯		1		
4	黄膜		1		
3	弹片	不锈钢	1	Ag	
2	塑座	LCP	1	黑色	
1	卡件	H62	1	Ag	

THIS DOCUMENT IS THE SOLE PROPERTY OF **深圳市步步精科技有限公司**
BBJconn Technology Co., Ltd.
Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
PDWG.NO: 0436-1

NAME: 轻触开关 4x7x2.5 双色灯左绿右黄 贴片 不锈钢弹片 脚距8.0 160gf 带带
PJ. NO.: 901-432-013001-T9G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: AO UNIT: mm PAGE: 1/2

APPD. JM_Zheng
CHKD. LYX
DR. TSP

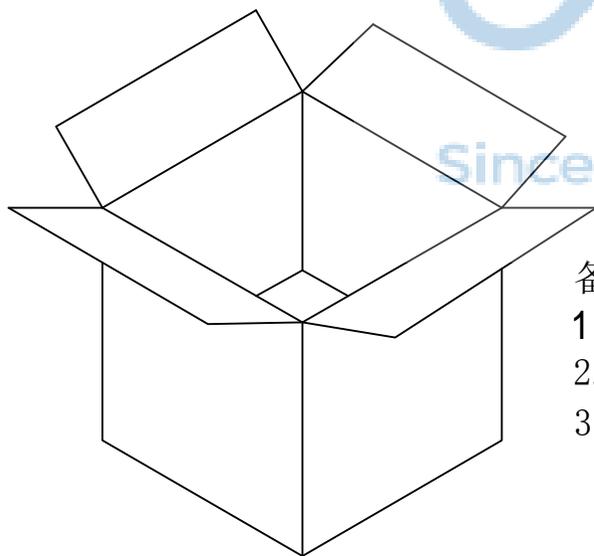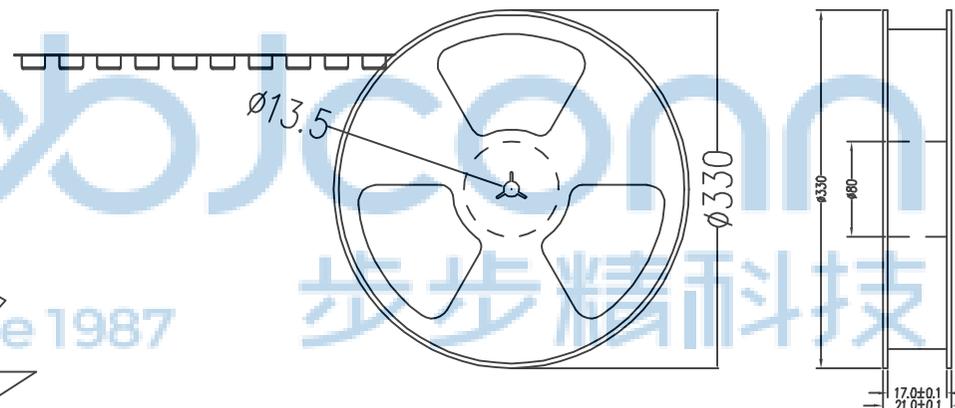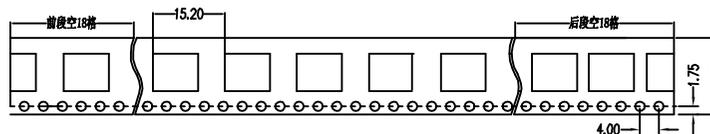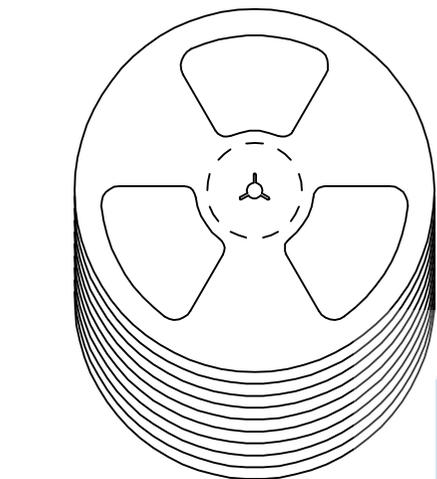

备注:

1. 包装数量：3000/PCS/卷，10卷/箱
2. 包装袋长度：每卷前后各空10-20个空格，中间包装。
3. 材质：
载体：聚丙烯（PS），
上带：聚乙烯（PET），
卷盘：聚苯乙烯。

纸箱规格：345*345*23MM

纸箱规格：345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: 轻触开关 4x7x2.5 双色灯左绿右黄 贴片 不锈钢弹片 脚距8.0 160gf 编带	
APPD.	JM_Zheng	PJ. NO.: 901-432-013001-T9G SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	SCALE: N/A		REV.: A0	UNIT: mm
PDWG.NO:	0436-1	DR.	TSP	PAGE: 2/2	