





General tolerances±0.2mm

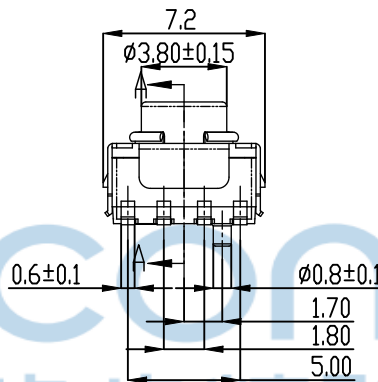

PCB Layout
(Top View)

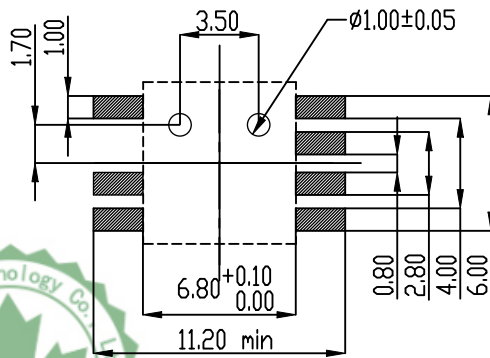

General tolerances±0.1mm



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

Specification

FUNCTION: momentary action
CONTACT TYPE: Normally Open

Mechanical

Operating force: 200±50 grams
Travel: 0.70±0.20mm

Electrical

CURRENT RANGE: 50mA, 12VDC
CONTACT RESISTANCE: 100mΩ Max.
INSULATION RESISTANCE(DC 250V): 100MΩ min.

Environmental

OPERATING TEMPERATURE: -40°C to 85°C
STORAGE TEMPERATURE: -40°C to 85°C

0	1	2	3	4	5	6	7	8
No Light	Red	Yellow	Green	Blue	White	Pure Green	R.G.B	Amber

ELECTRICAL SCHEMATIC

Switch			
LED			
	全彩(GRB)	雙色(dual color)	單色(single color)

No.	Part Name	Material	Qty.
1	Plunger	Silicone	1
2	Cover	SUS304	1
3	Contact	SUS301,Ag plating 20μ"	1
4	Base	PPA,white	1
5	Terminal	C2680,Ag plating 60μ"	1

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0103-1



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .XX': ±1"

APPD JM_Zheng

CHKD Tang

DR LYX


NAME: 轻触开关 6.8x7.2x5.5 七脚
贴片 带柱 带灯 200G

PJ NO: 901-436-013001-J8G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

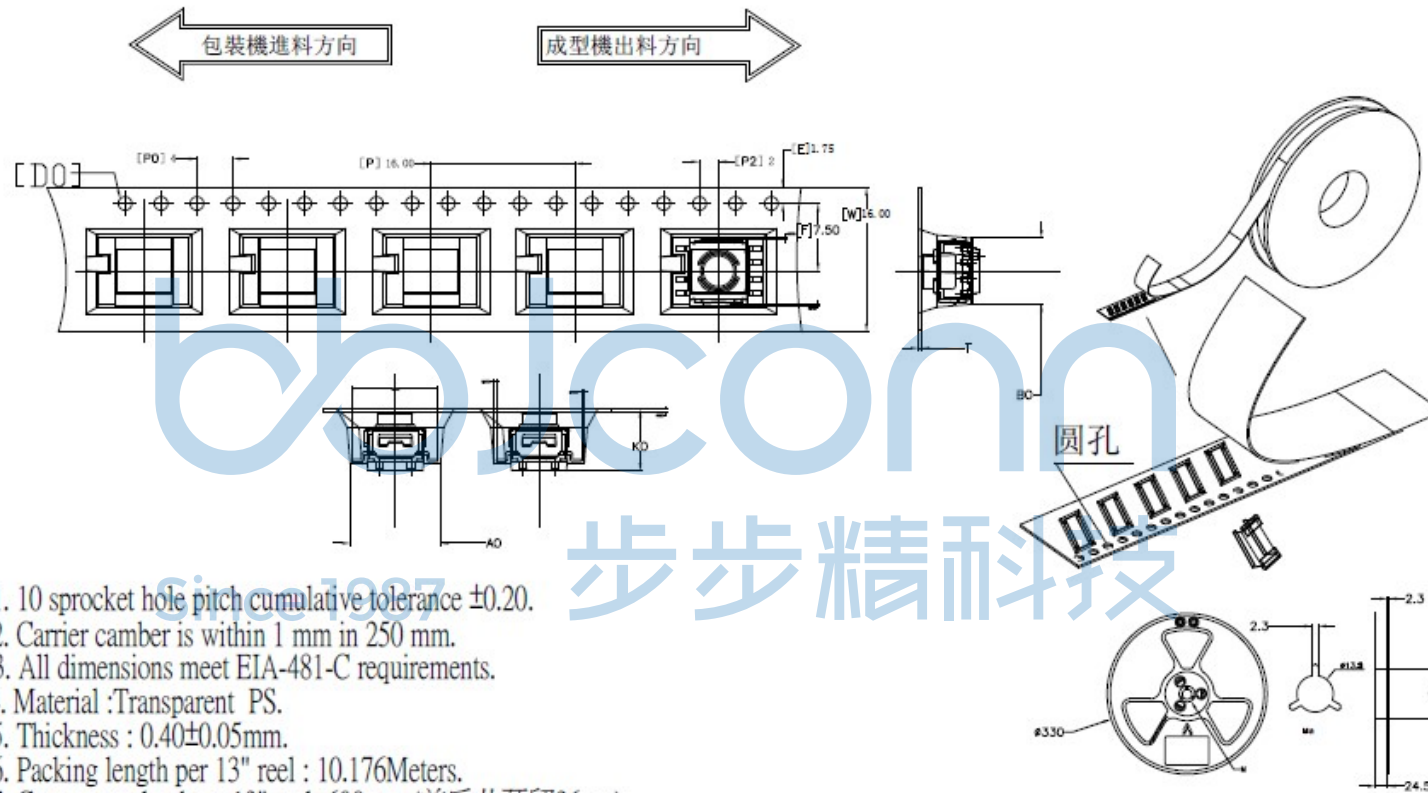

$0.000^\circ \pm 0.25^\circ$	0.000 ± 0.05
$0.00^\circ \pm 0.5^\circ$	0.00 ± 0.10
$0.0^\circ \pm 1^\circ$	0.0 ± 0.20
$0^\circ \pm 2^\circ$	0 ± 0.50
ANGULAR	LINEAR
TOLERANCE	

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD Tang

DR

LYX

NAME: 轻触开关 6.8x7.2x5.5 七脚
贴片 带柱 带灯 200G

PJ NO: 901-436-013001-J8G

SIZE: A4 DRW NO:

FINISH: SEE NOTES

SCALE: N/A

REV: A0

UNIT: mm

PAGE: 1/2

MAT'L: SEE NOTES