


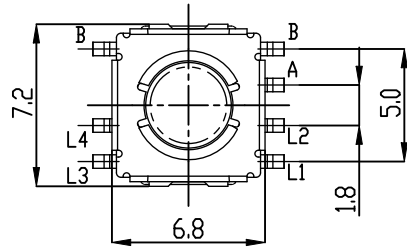


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	ZY




Specification
 FUNCTION: momentary action
 CONTACT TYPE: Normally Open
 Mechanical
 Operating force: 200±50 grams
 Travel: 0.70±0.20mm
 Electrical
 CURRENT RANGE: 50mA, 12VDC
 CONTACT RESISTANCE: 100mΩ Max.
 INSULATION RESISTANCE(DC 250V): 100MΩ min.
 Environmental
 OPERATING TEMPERATURE: -40°C to 85°C
 STORAGE TEMPERATURE: -40°C to 85°C

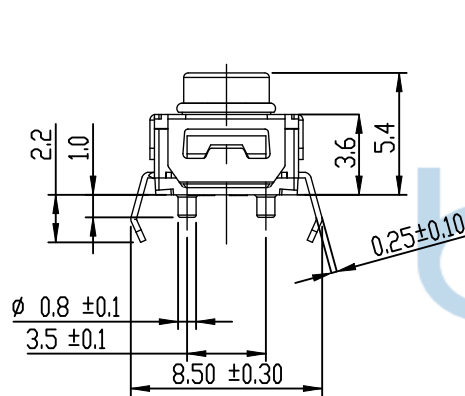


ELECTRICAL SCHEMATIC

Switch			
LED			
	全彩(GRB)	雙色(dual color)	單色(single color)

General tolerances±0.2mm

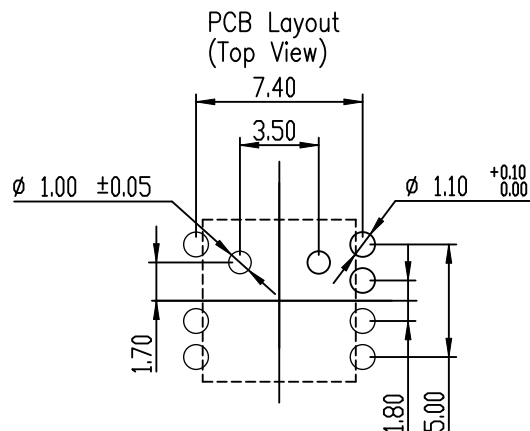

General tolerances±0.1mm





No.	Part Name	Material	Qty.
1	Plunger	Silicone	1
2	Cover	SUS304	1
3	Contact	SUS301,Ag plating 20μ"	1
4	Base	PPA,white	1
5	Terminal	C2680,Ag plating 60μ"	1

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: 轻触开关 6.8X7.2X5.4 七脚 弯插 带柱 带灯 200gf 盒装	
APPD.	JM_Zheng	PJ. NO.: 901-436-023001-J8G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0103-2	DR.	ZY	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	ZY

包装要求:
1. 吸塑盒尺寸:256*190*0.9;
2. 包装数量:每吸塑盒包装180pcs.

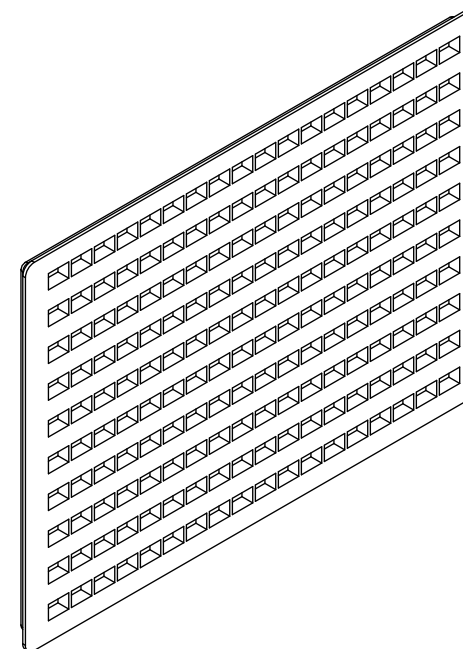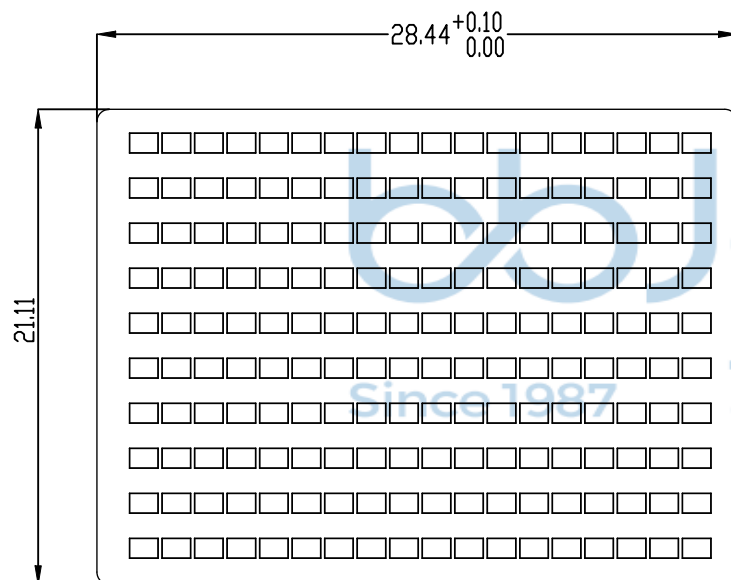

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: 轻触开关 6.8X7.2X5.4 七脚 弯插 带柱 带灯 200gf 盒装	
				PJ. NO.: 901-436-023001-J8G	
PDWG.NO: 0103-2		APPD.	JM_Zheng		
		CHKD.	LYX		
		DR.	ZY	FINISH: SEE NOTES	MAT'L.: SEE NOTES
				SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2