


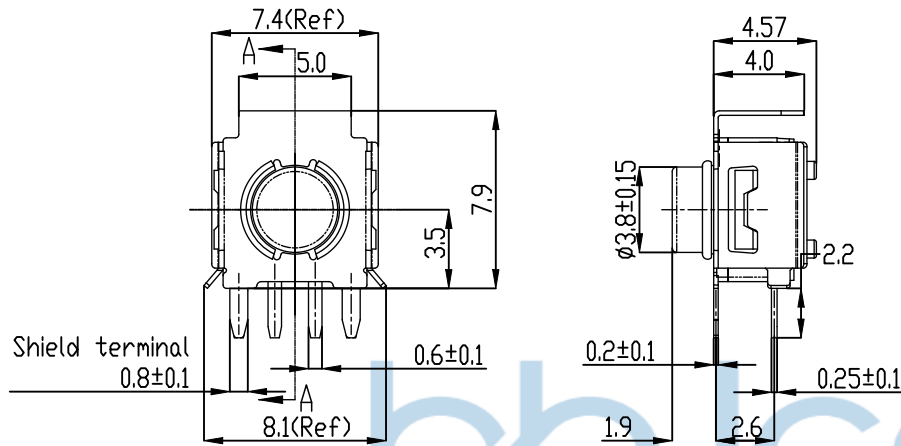


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

Specification
FUNCTION: momentary action
CONTACT TYPE: Normally Open
Mechanical
Operating force: 200 ± 50 grams
Travel: 0.70 ± 0.20 mm
Electrical
CURRENT RANGE: 50mA, 12VDC
CONTACT RESISTANCE: 100m Ω Max.
INSULATION RESISTANCE (DC 250V): 100M Ω min.
Environmental
OPERATING TEMPERATURE: -40° C to 85° C
STORAGE TEMPERATURE: -40° C to 85° C




PCB Layout
(Top View)

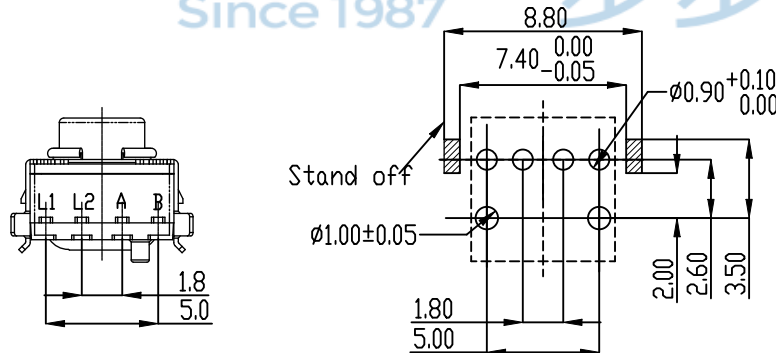

General tolerances ± 0.1 mm

0	1	2	3	4	5	6	8
No Light	Red	Yellow	Green	Blue	White	Pure Green	Amber


ELECTRICAL SCHEMATIC

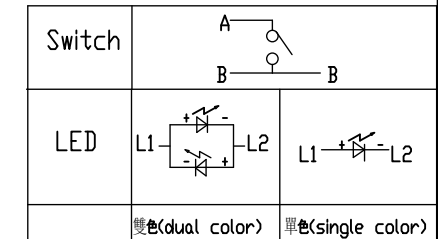

No.	Part Name	Material	Qty.
1	Plunger	Silicone	1
2	Cover	SUS304	1
3	Contact	SUS301,Ag plating 20 μ "	1
4	Base	PPA,white	1
5	Terminal	C2680,Ag plating 60 μ "	1




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 轻触开关 7.4x7.9x6.37 侧按 带弹带柱 带灯 六脚插 200G 编带	
X': ± 3 X'': ± 2 XX': ± 1		PJ NO: 901-436-043001-J8G	
APPD JM_Zheng		SIZE:A4	
CHKD Tang		DRW NO:	
PDWG NO:0103-1		FINISH:SEE NOTES	
DR LYX		MAT'L:SEE NOTES	
		SCALE:N/A	
		REV:A0	
		UNIT:mm	
		PAGE:1/2	

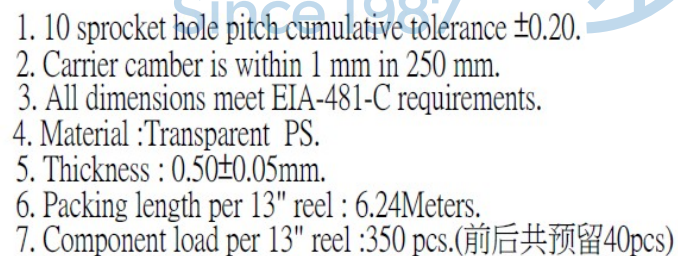

0.000°±0.25°	0.000±0.05
0.00°±0.5°	0.00±0.10
0.0°±1°	0.0±0.20
0°±2°	0±0.50
ANGULAR	LINEAR
TOLERANCE	

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0103-1



深圳市步步精科技有限公司

NAME:	轻触开关 7.4x7.9x6.37 侧按 带弹 带灯 六脚插 200G 编带
-------	---

	PJ NO: 901-436-043001-J8G
---	---------------------------

	SIZE:A4	DRW NO:
---	---------	---------

FINISH:SEE NOTES	MAT'L:SEE NOTES
------------------	-----------------

SCALE:N/A	REV:A0	UNIT:mm	PAGE: 1/2
-----------	--------	---------	-----------