




REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

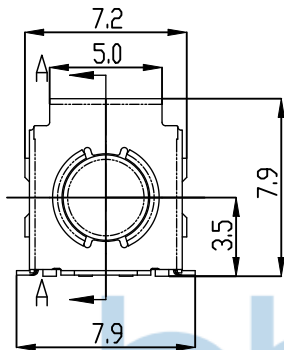




Specification
FUNCTION: momentary action
CONTACT TYPE: Normally Open

Mechanical
Operating force: 200±50 grams
Travel: 0.70±0.20mm

Electrical
CURRENT RANGE: 50mA, 12VDC
CONTACT RESISTANCE: 100mΩ Max.
INSULATION RESISTANCE(DC 250V): 100MΩ min.


Environmental
OPERATING TEMPERATURE: -40°C to 85°C
STORAGE TEMPERATURE: -40°C to 85°C

PCB Layout
(Top View)

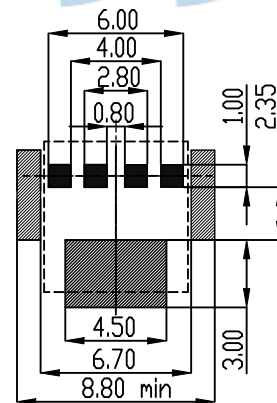

0	1	2	3	4	5	6	8
No Light	Red	Yellow	Green	Blue	White	Pure Green	Amber

ELECTRICAL SCHEMATIC

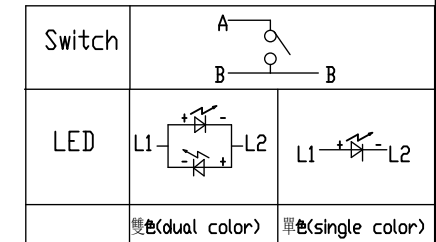

No.	Part Name	Material	Qty.
1	Plunger	Silicone	1
2	Cover	SUS304	1
3	Contact	SUS301,Ag plating 20μ"	1
4	Base	PPA,white	1
5	Terminal	C2680,Ag plating 60μ"	1


THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0103-1

深圳市步步精科技有限公司

NAME: 轻触开关 7.4x7.9x6.45 侧按 带弹锁孔 带灯 全贴带柱 200G	PJ NO: 901-436-043002-J8G
APPD: JM_Zheng	SIZE:A4
CHKD: Tang	DRW NO:
DR: LYX	FINISH:SEE NOTES
	MAT'L:SEE NOTES
	SCALE:N/A
	REV:A0
	UNIT:mm
	PAGE:1/2



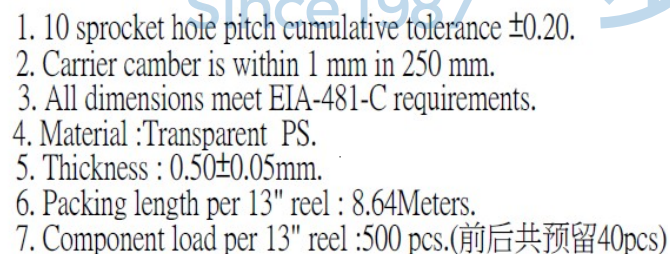

0.000°±0.25°	0.000±0.05
0.00°±0.5°	0.00±0.10
0.0°±1°	0.0±0.20
0°±2°	0±0.50
ANGULAR	LINEAR
TOLERANCE	

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0103-1



 深圳市步步精科技有限公司

~~| | |
|------------------|-----------------|
| .X: ± 0.38 | X*: $\pm 3^*$ |
| .XX: ± 0.25 | X*: $\pm 2^*$ |
| .XXX: ± 0.13 | .XX*: $\pm 1^*$ |~~

APPD	JM_Zheng
------	----------

CHKD	Tang
------	------

DR

LY	
----	--

NAME:	轻触开关 7.4x7.9x6.45 侧按 带弹锁孔 带灯 全贴带柱 200G
-------	---

	PJ NO: 901-436-043002-J8G
---	---------------------------

	SIZE:A4	DRW NO:
--	---------	---------

FINISH:SEE NOTES

SCALE:N/A	REV:A
-----------	-------

MAT'L:SEE NOTES

UNIT:mm PAGE:1/2