

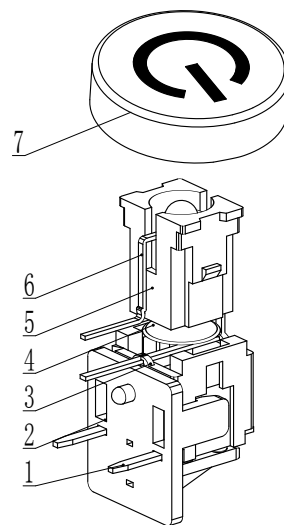


07.5±0.2

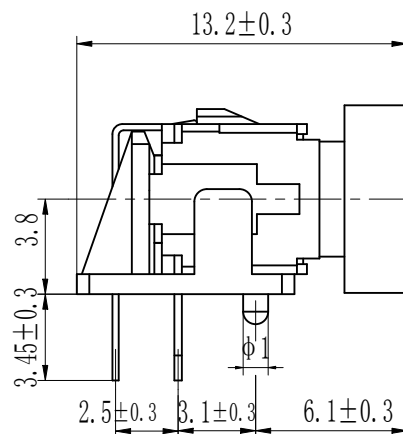




轻触开关主要技术指标: Main Specifications:

气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength	绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist Test
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	160/260gf±50gf	10W times	12±1 hours.


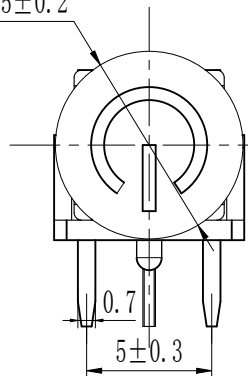


灯光选型表

灯光	灯光代码
白光	W white
红光	R Red
绿光	G Green
黄光	Y Yellow
蓝光	BL Blue
..	

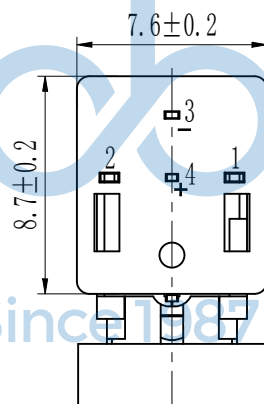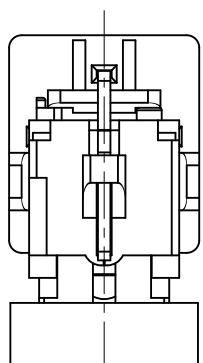

元件面孔位图

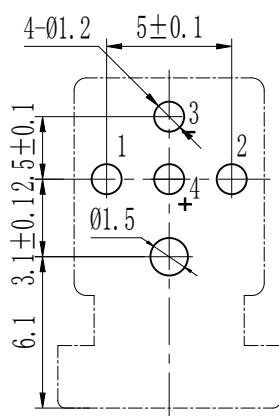

电原理图




7	圆帽	PC	1	黑漆	
6	LED 灯		1		A0670蓝光长负短正
5	斜边按钮	PA66	1	瓷白	
4	弹片	不锈钢	1	Ag	
3	塑座	PA66	1	黑色	
2	定位板	PA66	1	黑色	
1	卡件	H62	1	Ag	
序号	名称	材料	数量	镀层/颜色	备注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0436-1

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	NAME: 轻触开关 7.6x8.7x13.2 侧插 蓝色灯 不锈钢弹片 260GF 瓷白按钮 φ7.5黑漆帽
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: TS.43.73-21-3Z-01
DR. TSP		SIZE: A4 DRW NO.:
		FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

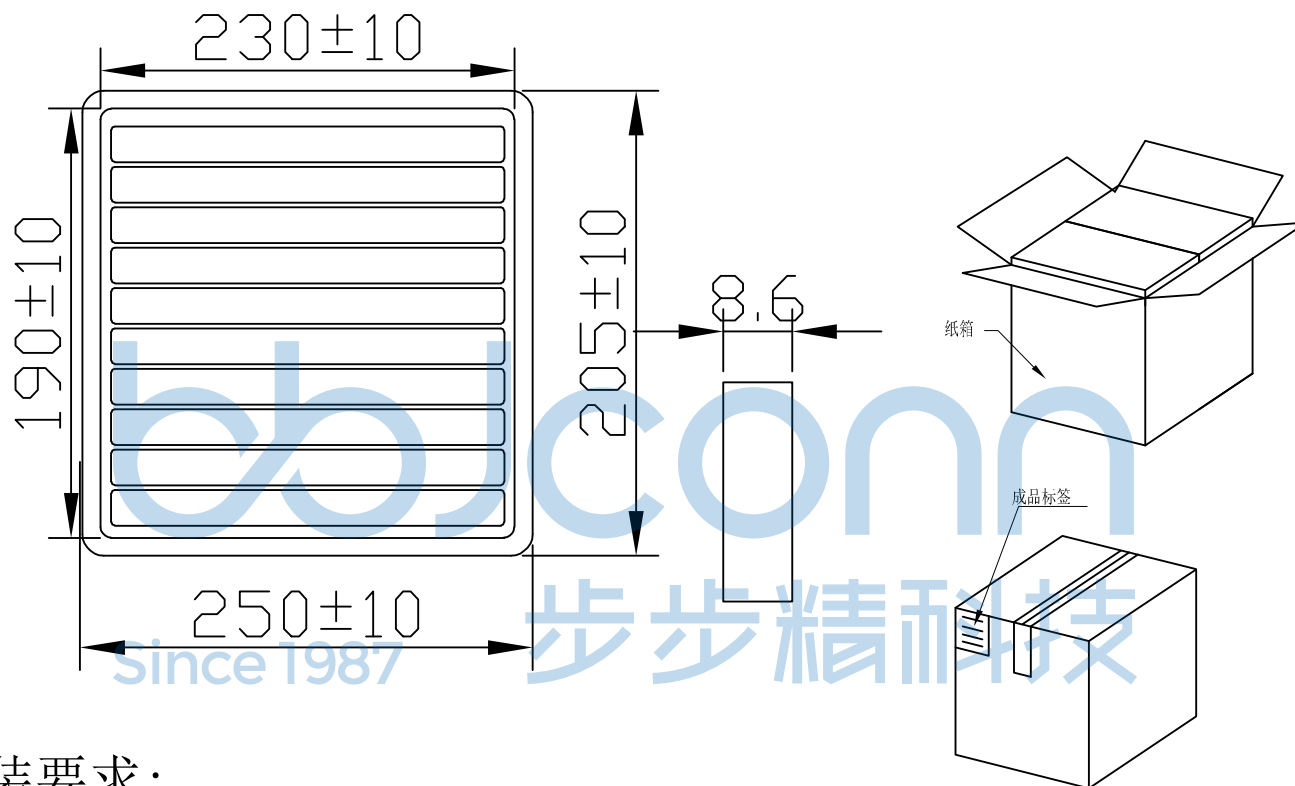

1. 包装要求:

- 1.1 每盒吸塑盒包装200pcs;
- 1.2 每20盘放一箱, 共计4000PCS;
- 1.3 纸箱外贴上标签。

纸箱规格: 350*210*290

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0436-1		\$! c 2!•!•2!0 ° 9L€ œ (		NAME: 轻触开关 7.6x8.7x13.2 侧插 蓝色灯 不锈钢弹片 260GF 瓷白按钮 φ7.5黑漆帽	
APPD. JM_Zheng		PJ. NO.: TS.43.73-21-3Z-01		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR. TSP		SCALE: N/A		REV.: A0	
		UNIT: mm		PAGE: 2/2	