






CIRCUIT

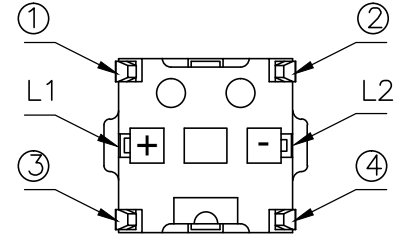





P.C.B LAYOUT



NOTES:

- 1.RATING: 12VDC 50mA
(额定电压电流: 12VDC 50mA)
- 2.CONTACT RESISTANCE: 100mΩ Max
(接触电阻: 不超过 100毫欧)
- 3.INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
(绝缘电阻: 最小 100MΩ 250VDC 1分钟)
- 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MIN
(耐电压: 最小 250VAC 1分钟)
- 5.LIFE TEST: 200,000 CYCLES
(寿命测试: 20万次)
- 6.OPERATION FORCE: 160±30g / 200±30g / 260±30g
(力度: 160±30g / 200±30g / 260±30g)
- 7.TRAVEL: 0.25±0.1mm
(行程: 0.25±0.1mm)

5	LED	GaAsP/GaP
4	TERMINAL	Bronze Silver Plated
3	CONTACT	SUS
2	BUTTON	POM
1	HOUSING	PBT
ITEM	PART NAME	MATERIAL

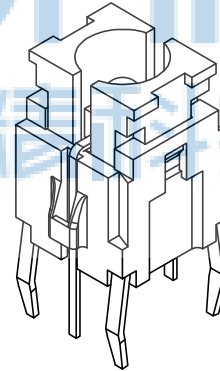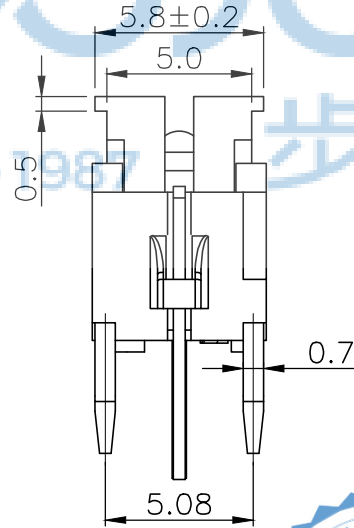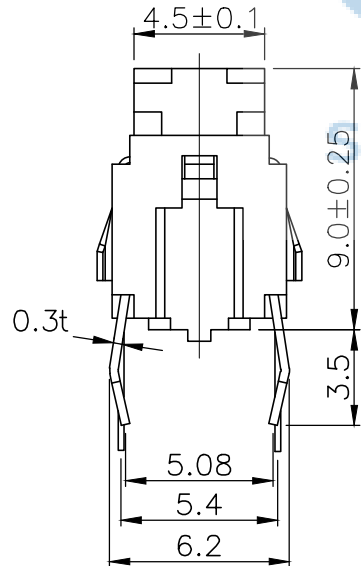

LED COLOR								
Red	Yellow	Green	Blue	White	Pure Green	Red Yellow	Red Green	Red Blue




THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0294-2

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	NAME: 轻触开关 6x6x9.0 直插 带灯 (红白双色TS1-00-00R/W) 200g 不锈钢弹片	
APPD	JM_Zheng	PJ NO:	TS.01.21-26-3Z-01
CHKD	LYX	SIZE:A4	DRW NO:
DR	SGF	FINISH:SEE NOTES	MAT'L:SEE NOTES
		SCALE:N/A	REV: A0
		UNIT:mm	PAGE: 1/2

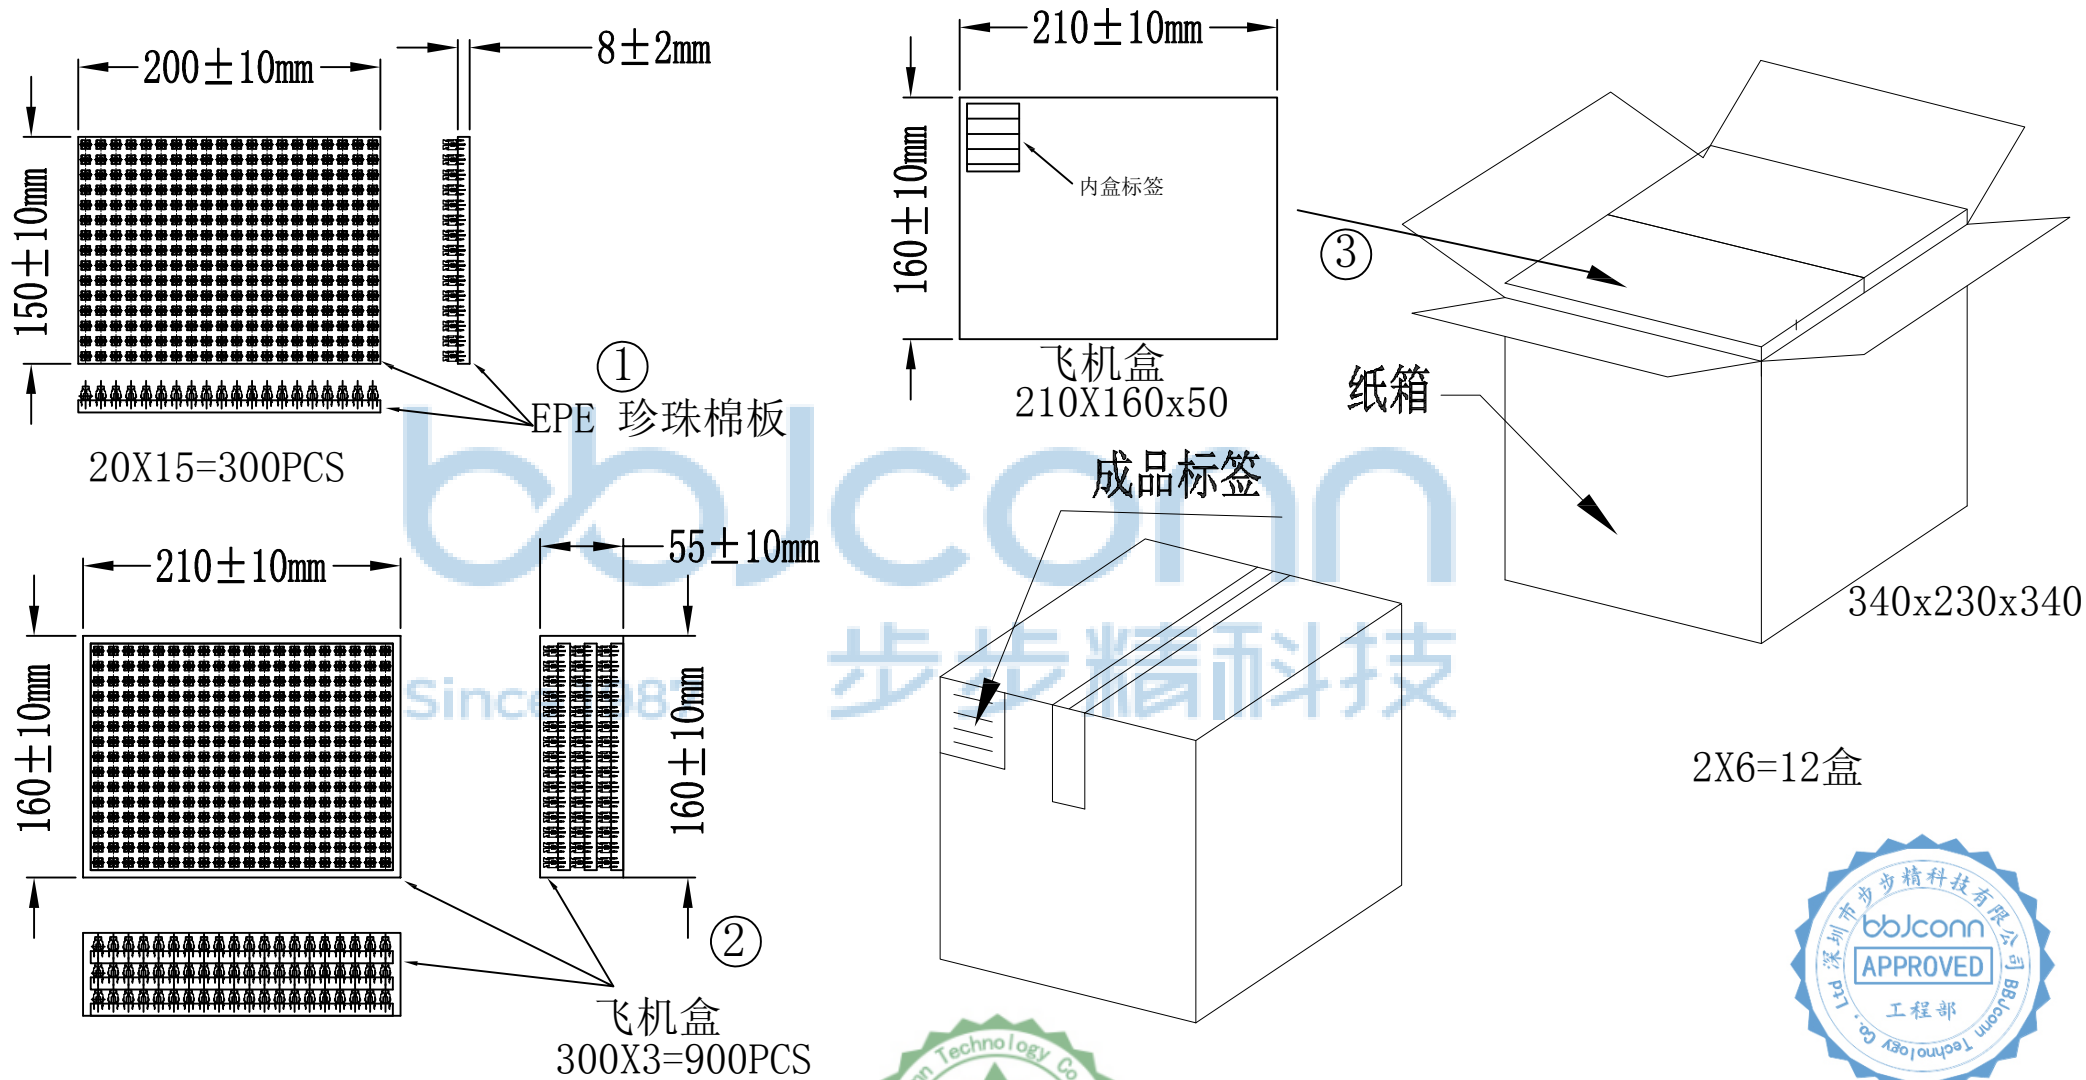

1. 包装要求:

- 1.1 每盒飞机盒包装900pcs;
- 1.2 每12盒放一箱, 共计10800PCS;
- 1.3 纸箱外贴上标签;

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0294-2

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$	NAME: 轻触开关 6x6x9.0 直插 带灯 (红白双色TS1-00-00R/W) 200g 不锈钢弹片
APPD	JM_Zheng	PJ NO: TS.01.21-26-3Z-01
CHKD	LYX	SIZE:A4 DRW NO:
DR	SGF	FINISH:SEE NOTES MAT'L:SEE NOTES
		SCALE:N/A REV: A0 UNIT:mm PAGE: 2/2