


REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

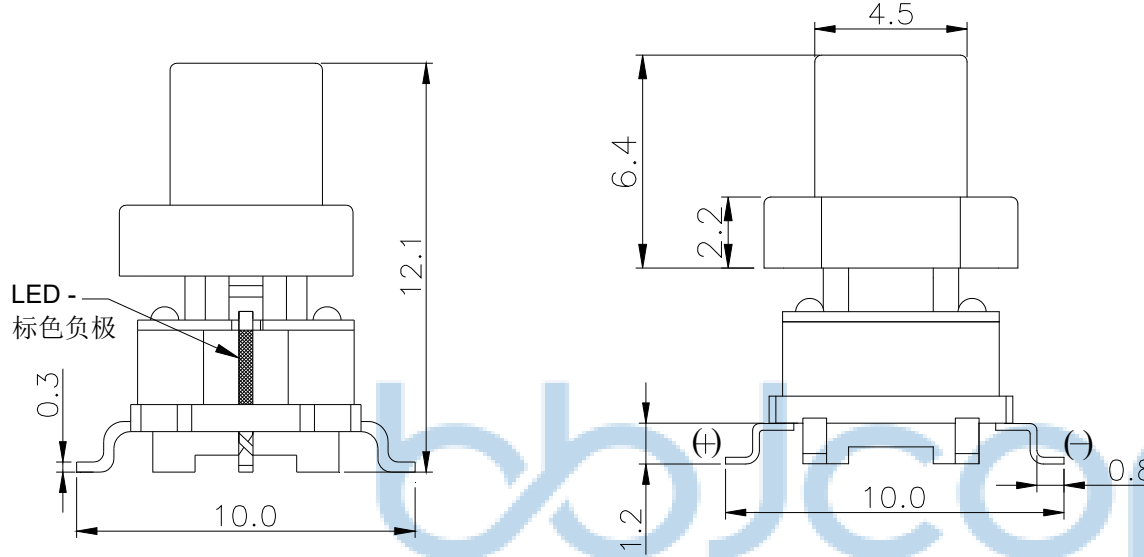




NOTES:

- 1.RATING: 12VDC 50mA
- 2.CONTACT RESISTANCE: 100mΩ Max
- 3.INSULATION RESISTANCE: 250VDC FOR 1MIN
- 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MIN
- 5.LIFE TEST:100,000 CYCLES
- 6.OPERATION FORCE&TRAVEL: SEE SPECIFICATION

开关贴膜245度,帽子不能过



P.C.B.Layout

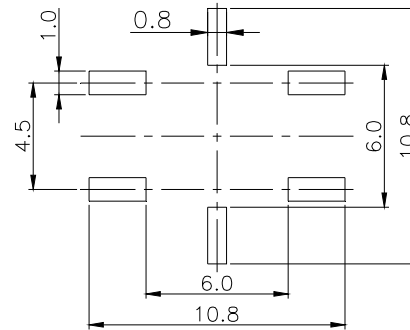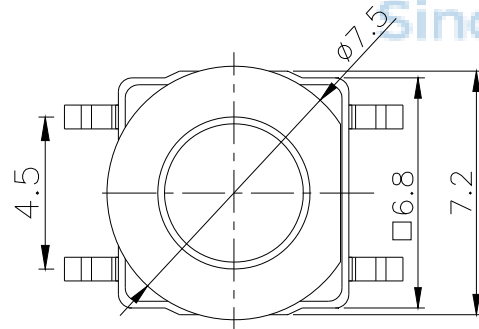

7	COVER	ABS
6	COVER	PET
5	TERMINAL	Bronze Silver Plated
4	CONTACT	PBS
3	LED	GaAsP/GaP
2	BUTTON	PA66
1	HOUSING	PA46
ITEM	PART NAME	MATERIAL

LED COLOR									
1	2	3	4	5	6	12	13	14	23
Red	Yellow	Green	Blue	White	Pure Green	Red Yellow	Red Green	Red Blue	Yellow Green



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0292-2


深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X'': ±2'
.XXX: ±0.13 .X'': ±1'

APPD JM_Zheng
CHKD LYX
DR SGF

NAME:轻触开关 6.8X6.8X12.1 六脚贴片 带红蓝双色灯
带帽(黑色) 10.0脚 不锈钢弹片 260G

PJ NO: TS.43.73-11-3Y-01
SIZE:A4 DRW NO:
FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV: A0 UNIT:mm PAGE: 1/2

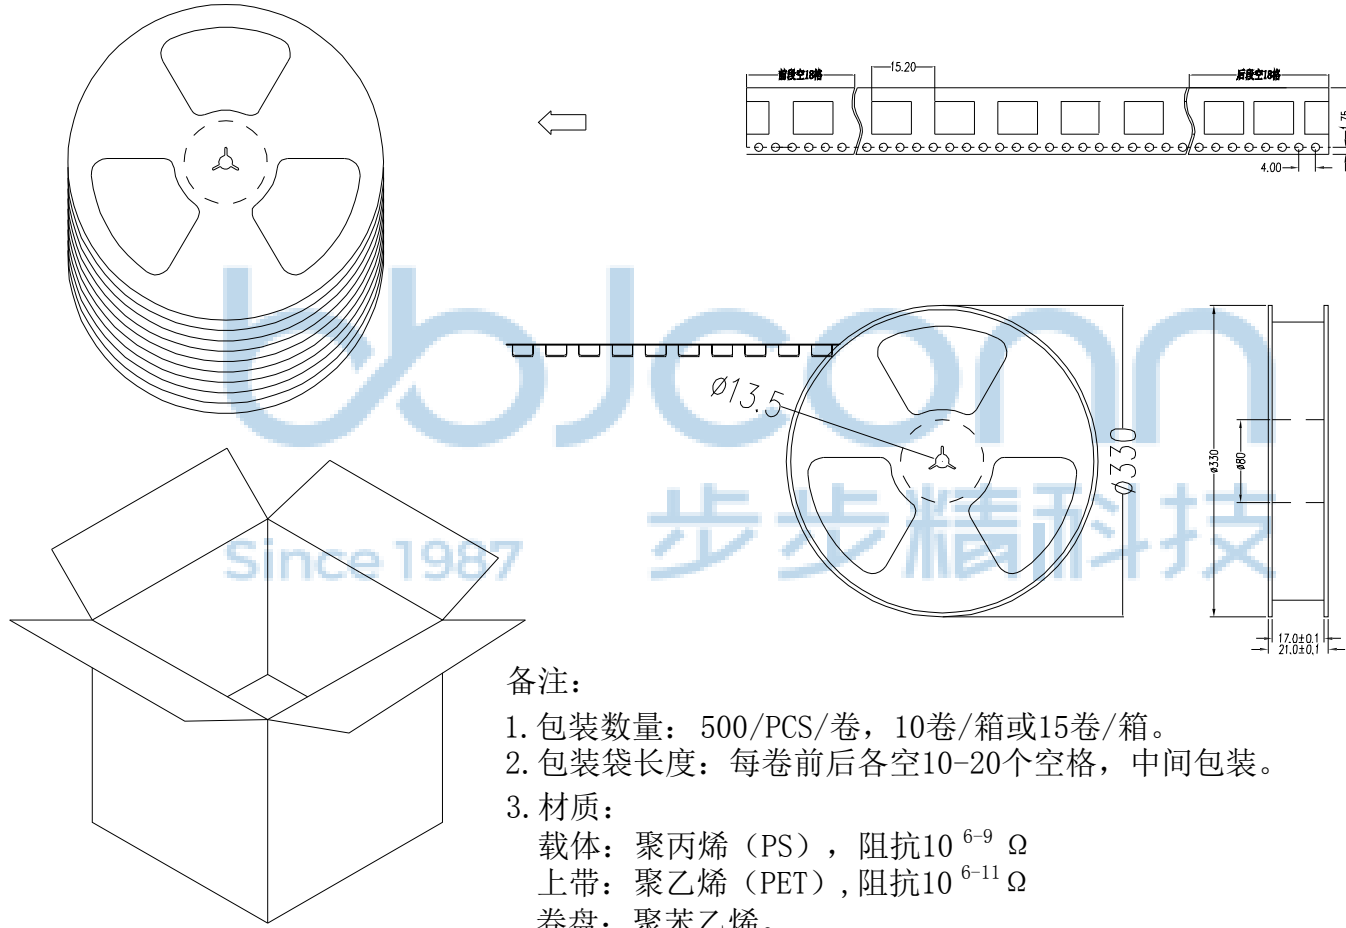

备注:

1. 包装数量: 500/PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME:轻触开关 6.8X6.8X12.1 六脚贴片 带红蓝双色灯 带帽(黑色) 10.0脚 不锈钢弹片 260G	
.X: ±0.38 .X*: ±3* .XX: ±0.25 .X*: ±2* .XXX: ±0.13 .XX*: ±1*		APPD	JM_Zheng	PJ NO: TS.43.73-11-3Y-01	
PDWG NO: 0292-2		CHKD	LYX	SIZE:A4 DRW NO:	
DR		SGF		FINISH:SEE NOTES MAT'L:SEE NOTES	
				SCALE:N/A REV: A0 UNIT:mm PAGE: 2/2	