
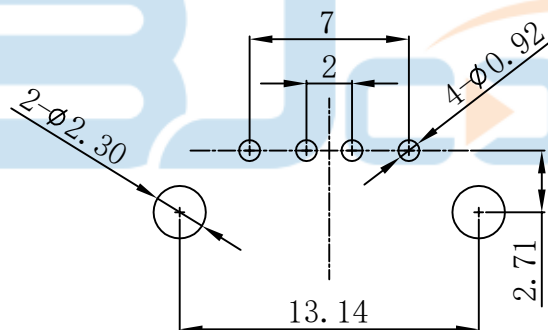
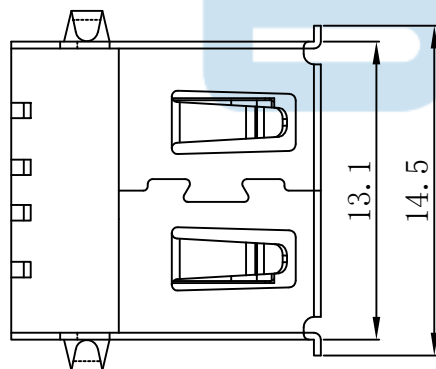
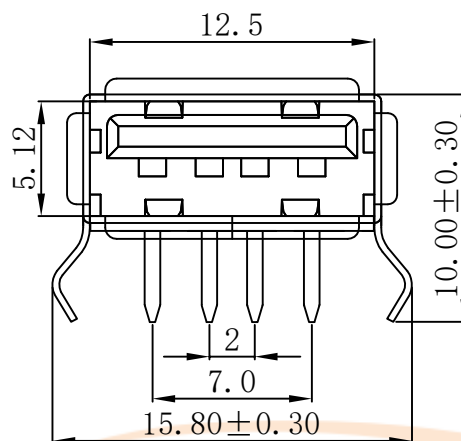


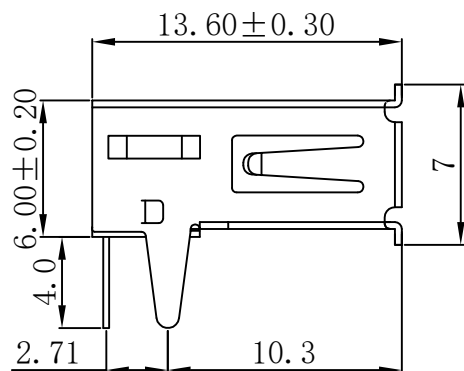

RECOMMEND P. C. B LAYOUT
TOLERANCE: ± 0.05 (TOP VIEW)

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 35N (MAX)
Unmate force: 10N (MIN)
- 端子保持力: Terminal Retention
10N (MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Ternmaplastics,
U1 94V-0 PBT Black/WHITE
- 端子: Contact: Copper Alloy C2680/C5191
- 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 外壳: Shell:
Nickel Plating



TOLERANCE UNSPECIFIED
.0 ± 0.35
.00 ± 0.25
.000 ± 0.15
X.° $\pm 2.00^\circ$
CUSTOMER DRAWING



深圳市步步精科技有限公司

TITLE: USB 2.0 AF 90度 DIP L=13.60 H=6.0 弯脚
卷边 PBT白胶 铜壳 无后盖一字型

DRAWN/ DATE	设计 TSP	SIZE: A4	UNIT: MM.	PART. NO: UB.01.11-22-M001	
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0235-1	SHEET: 页码	

