
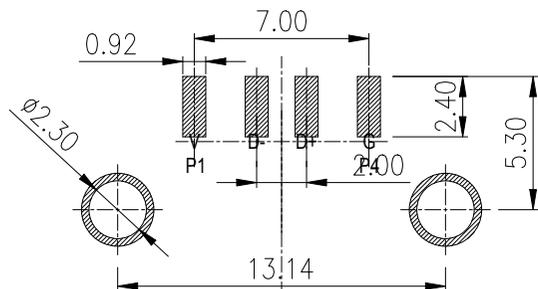






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

备注:


1. 材质:
1-1 塑胶: LCP黑胶
1-2 端子: 黄铜C2680
1-3 外壳: C2680/SPCC
2. 电镀:
端子接触区域: 镀金半金锡G/F
端子锡脚: 镀锡80-100u"min.
端子整个表面: 镀镍30-50u"
铁壳: 镀镍80-100u"
3. 电气性能:
3-1 耐电压: 500V 交流电
3-2 接触电阻: 50 毫欧 最大
3-3 绝缘阻抗: 500 兆欧最小
3-4 额定电流: 1.5A
4. 机械性能:
4-1 插入力: 3.5kgf MAX
4-2 拨出力: 1.02kgf MIN
5. 环境
温度范围: -20° C TO +65° C
6. 零件必须符合ROHS标准.

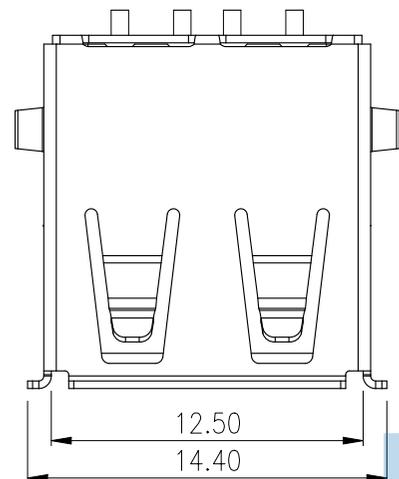

Recommend PCB layout

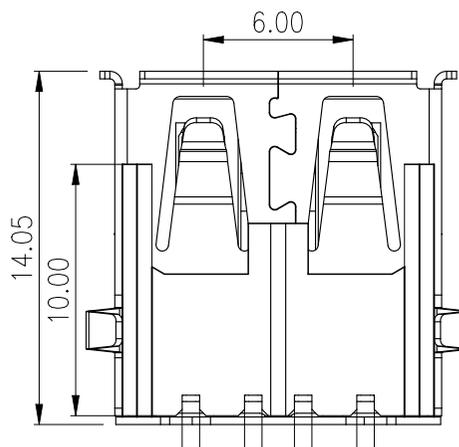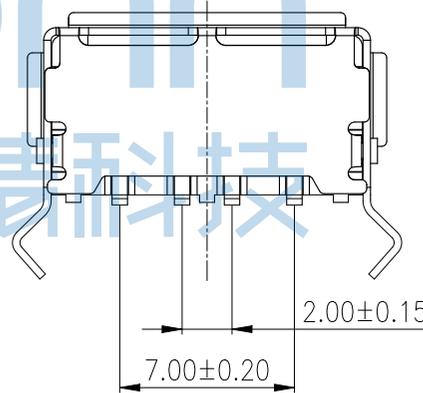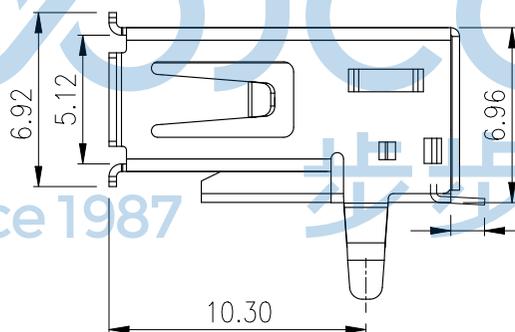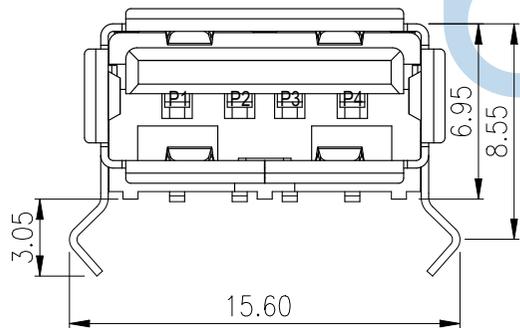

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X*: ±3" X*: ±2" XX*: ±1"		NAME: USB 2.0 AF 90度 L=14.05 后两脚插弯脚 端子SMT 卷边 LCP黑胶 铁壳 PJ. NO.: UB.01.51-11-V002 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
APPD.	JM_Zheng	CHKD.	LYX	DR.	TSP
PDWG.NO:	0383-1				

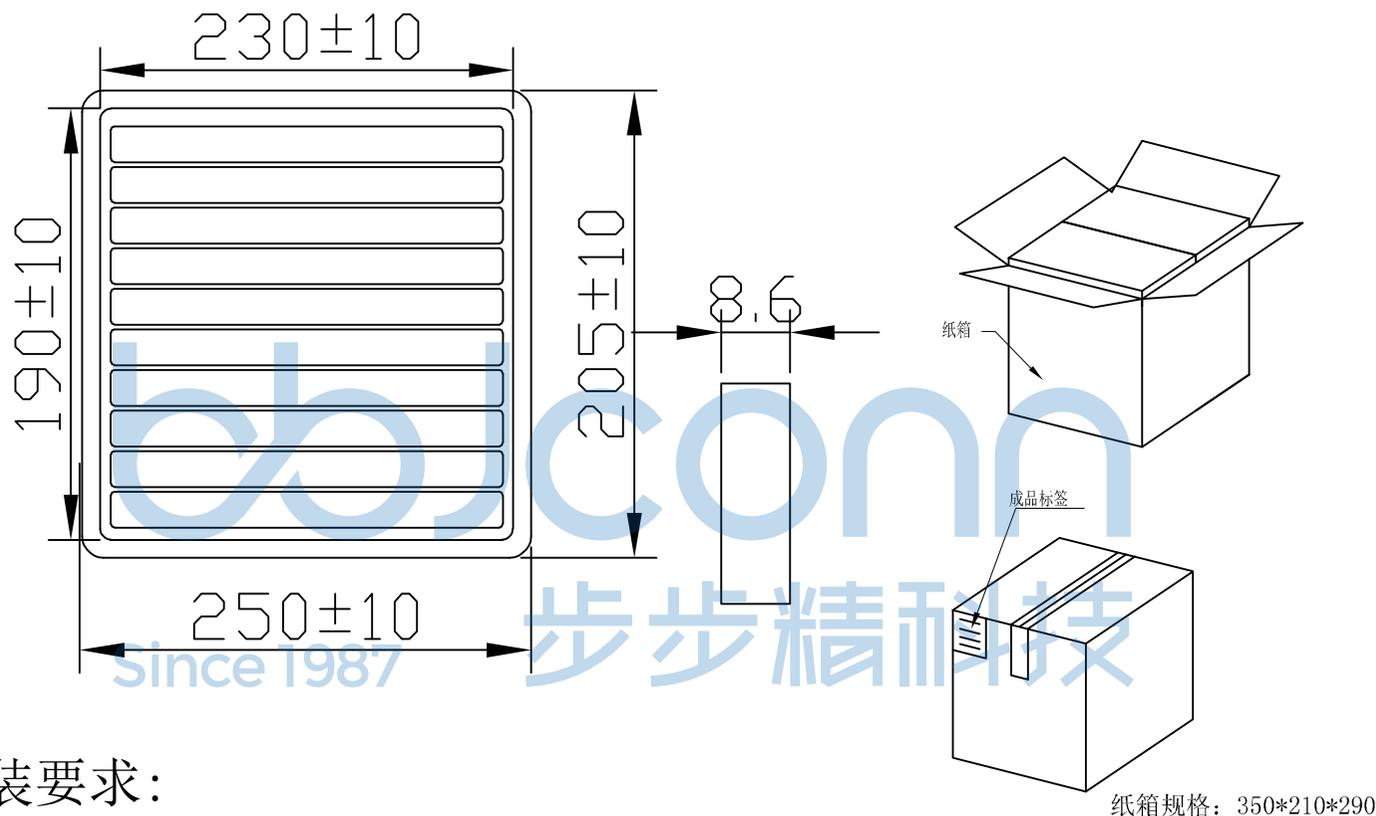

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 每20盘放一箱, 共计2000PCS;
 - 1.3 纸箱外贴上标签。

纸箱规格: 350*210*290

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0383-1		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*
APPD.	JM_Zheng	NAME: USB 2.0 AF 90度 L=14.05 后两脚插弯脚 端子SMT 卷边 LCP黑胶 铁壳	
CHKD.	LYX	PJ. NO.: UB.01.51-11-V002	
DR.	TSP	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2