
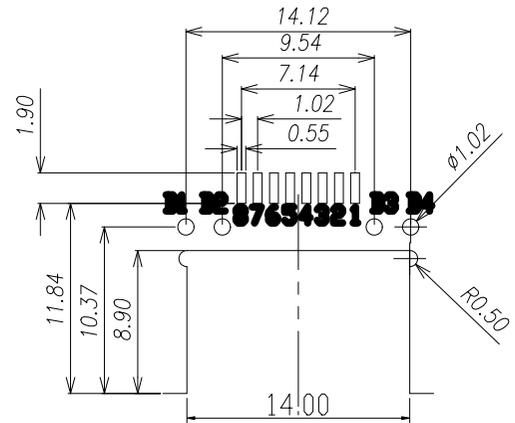


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023/04	



Recommend PCB Layout
(Jack Top View)

Tolerance: $\pm 0.05\text{mm}$

Recommend PCB Thickness: 1.6mm






技术参数SPECIFICATION

1. 额定电压 VOLTAGE RATING: 125 VAC RMS.
2. 额定电流 CURRENT RATING: 1.5 AMP.
3. 接触电阻 CONTACT RESISTANCE: 20 mΩ MAX.
4. 绝缘电阻 INSULATION RESISTANCE: 500MΩ MIN.
5. 耐压 WITHSTAND VOLTAGE: 500V AC @ 50Hz or 60Hz MIN.
6. 工作温度 OPERATING TEMPERATURE: -40°C~+85°C.
7. 插拔力 MATING AND UNMATING FORCE: 22 N MAX.
8. 寿命 DURABILITY :750 CYCLES MIN.



第壹 MATERIAL:

1. 壳体第壹 HOUSING PLASTIC: LCP, BLACK, UL94V-0.
2. 端子 TERMINAL :C5191.
3. 镀层 PLATING : GOLD PLATING ON CONTACT AREA. NICKEL UNDERPLATING OVERALL.

△ 为QC管控尺寸



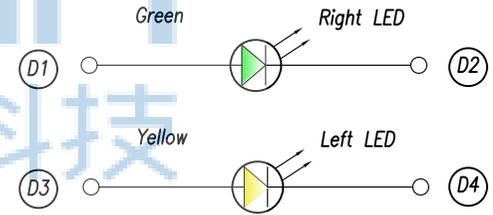
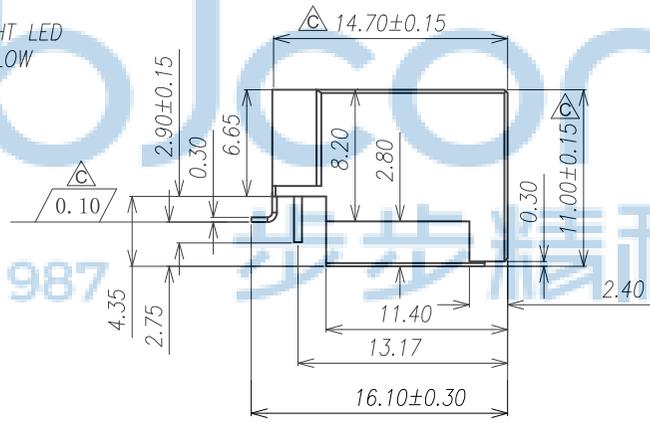
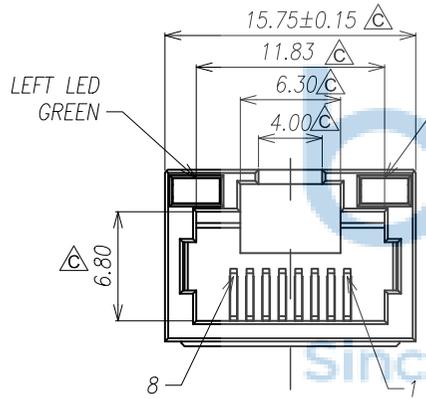


Emitting Color	$\lambda_p(\text{nm})$	V _{F@I_F} =20mA	I _{R@V_R} =5V
Green	565	1.8-2.4V	10μs MAX
Yellow	585	1.8-2.4V	10μs MAX

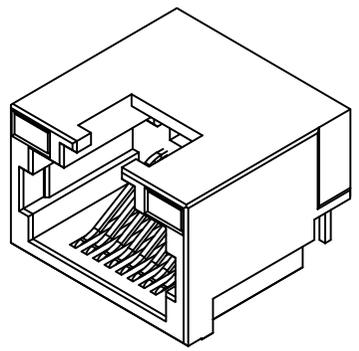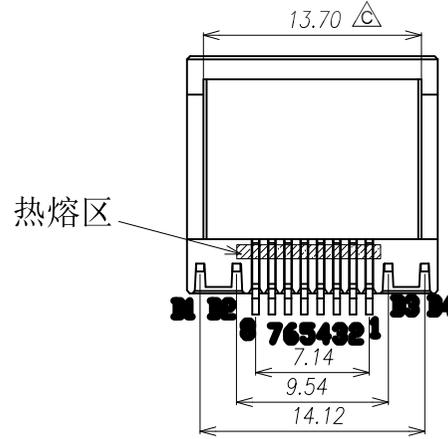

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$ X'': $\pm 2'$.XX': $\pm 1'$	
APPD.	JM_Zheng	23/05'02	NAME: 网络接口 RJ45 1x1 8P8C 90度 L=14.70 H=11.0 沉板2.75 带灯(左绿右黄) 无弹 不带滤波 全塑 SMT (111G001-000C)
PRIOR WRITTEN PERMISSION.	CHKD.	LYX	23/05'02
PDWG.NO:	0642-1	DR.	LHC 23/05'02
P.J. NO.:		SIZE: A4	
FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A3 UNIT: mm	
PAGE: 1/1			

REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	

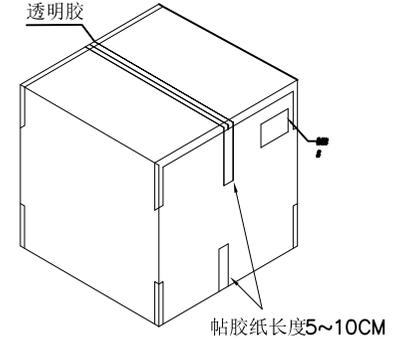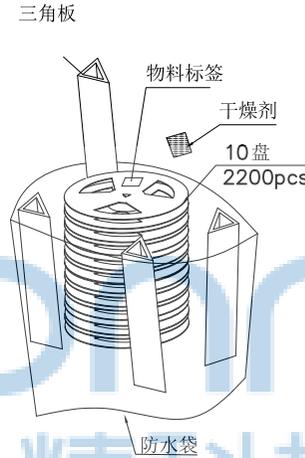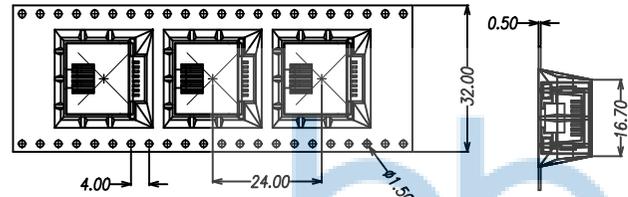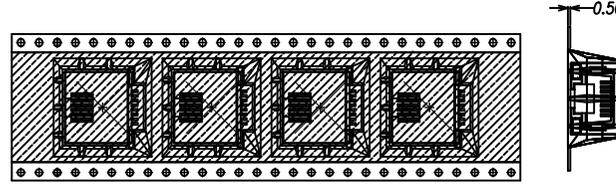
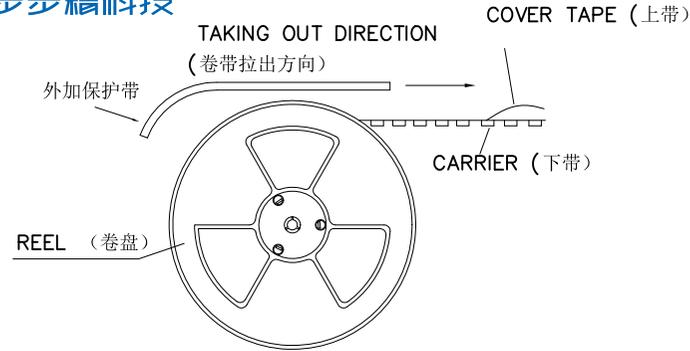


Notes:

1. 没卷前空10pcs, 后空10pcs, 中间包装220pcs产品, 尾部用美纹胶纸封住。
 2. 外圈再卷一圈保护带, 保护带最后重叠50mm Min, 同样用美纹胶纸封住。
 3. 每10卷盘装入1个外箱, 外箱角落用三角板填充, 用透明胶将外箱封口。
 4. 尾数箱用纸壳或者其他填充满或者将纸箱割小至刚好装下后再封箱。
 5. 在搬运过程中要轻拿轻放。
 6. 在运输过程中不可堆叠超过五箱的高度, 不可有重压现象。
 7. 如有客户需要, 将对应打印好的标签贴于外箱侧面右上角。
- 注: 如遇客户特殊要求请参照业务出货资料。

包装信息:

包装数量: 220pcs/卷; 2200pcs/箱;
净重: 5.65KG/箱
毛重: 9.27KG/箱

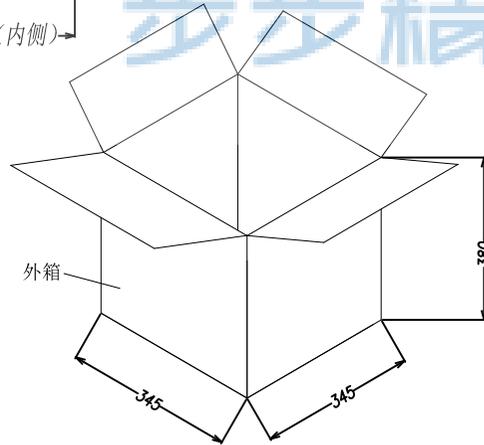

产品	产品规格	2200
干燥剂	2g	1包
防水袋	750*660*0.05	1个
透明胶	W=46	若干
美纹胶	宽15, T=0.08	若干
下带	宽32mm 透明, T=0.4	10*5.4M
上带	25.5mm 自粘	10*5.28M
卷盘	10*32.4mm	10
三角板	双坑 B=B 335*370*6	4
纸箱	双坑K=A 345*345*380	1
品名	规格 (mm)	用量 (pcs)

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0642-1

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME: 网络接口 RJ45 1x1 8P8C 90度 L=14.70 H=11.0 沉板2.75 带灯(左绿右黄) 无弹 不带滤波 全塑 SMT (111G001-000C)
APPD. JM_Zheng 23/05'02	CHKD. LYX 23/05'02	PJ. NO.: SIZE: A4 DRW NO.:
DR. LHC 23/05'02	FINISH: SEE NOTES	MAT'L.: SEE NOTES
SCALE: N/A	REV.: A3	UNIT: mm PAGE: 1/1