


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	ZY

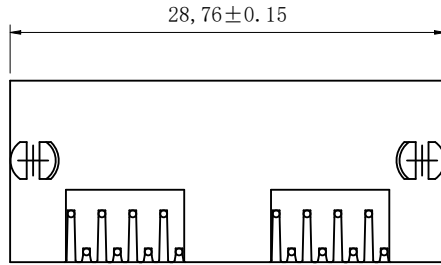

SPECIFICATIONS

ELECTRICAL

1. CURRENT RATING: 1.5AMPS@25° C
2. VOLTAGE RATING: 125V AC
3. INSULATION RESISTANCE: 1000MΩ MIN. @500VDC
4. WITHSTANDING VOLTAGE: 1000V AC RMS OR 1500V DC @ 0.5mA 50Hz or 60Hz 1Minute
5. CONTACT RESISTANCE: ≥30mΩ Max



WORKING TEMPERATURE: -40°C ~ +85°C

MECHANICAL


1. MATING/UNMATING FORCE: 20N/30N Max
2. RETENTION STRENGTH: ≥76N Min
3. DURABILITY: ≥750 MATING CYCLES Min

MATERIAL

1. HOUSING: PBT FILLED WITH FIBERGLASS
2. CONTACT MATERIAL: PHOSPHOR BRONZE Ø0.46mm
3. CONTACT PLATING: GOLD PLATING OVER NICKEL
F μ "INCH, 3 μ "INCH, 6 μ "INCH, 15 μ "INCH, 30 μ "INCH, 50 μ "INCH

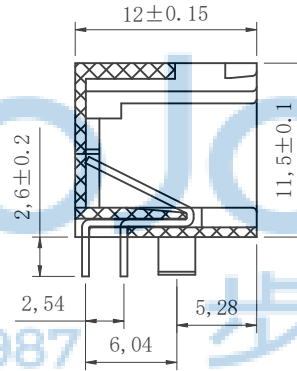
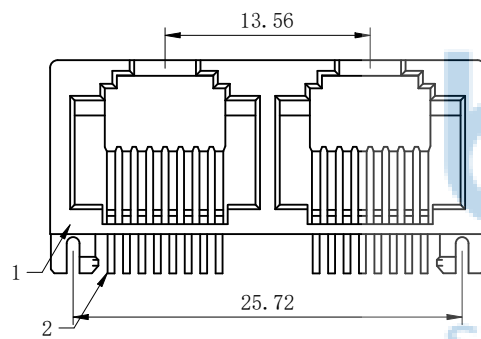


PC Board Layout

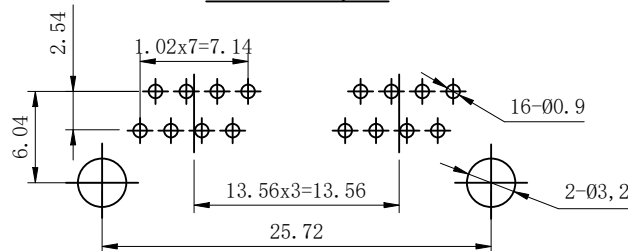


2	Contact	16	QSn6.5-0.1Y Ø0.46	Cu/Ep. Au
1	Housing	1	PBT Black	
No.	Descriptions	Qty	Material	Remark

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X': ±2' .XX': ±1'	
APPD. JM_Zheng		NAME: 网络接口 RJ45 1x2 8P8C 90度 L=12.0 端子DIP 无灯 无弹 全塑 盒装	
CHKD. LYX		PJ. NO.: 131-2K2-080002-J8G SIZE: A4 DRW NO.:	
PDWG.NO: 0927-1		FINISH: SEE NOTES MAT'L: SEE NOTES	
DR. ZY		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

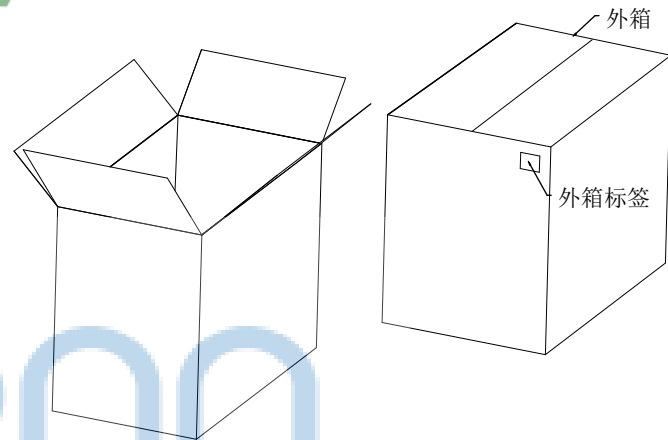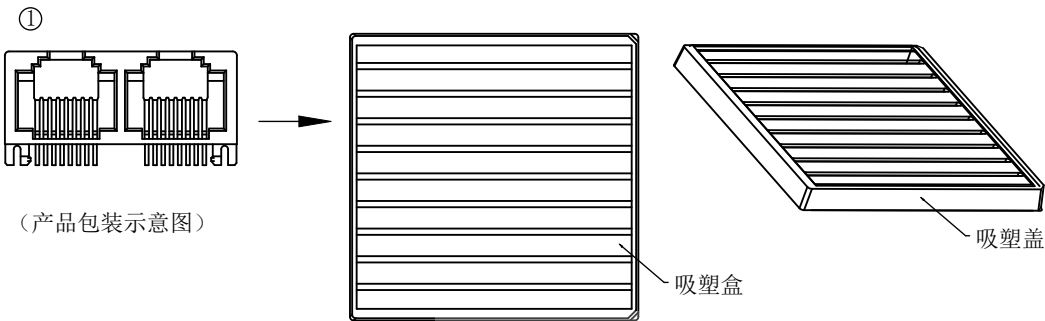

- 一、
- 1、将成品依次装入255X220X15的吸塑盒：
 - 2、如图所示，一个吸塑盒中装80PCS成品：
 - 3、吸塑盒装满80PCS后5盒1盖用缠绕膜缠绕。（如图所示）

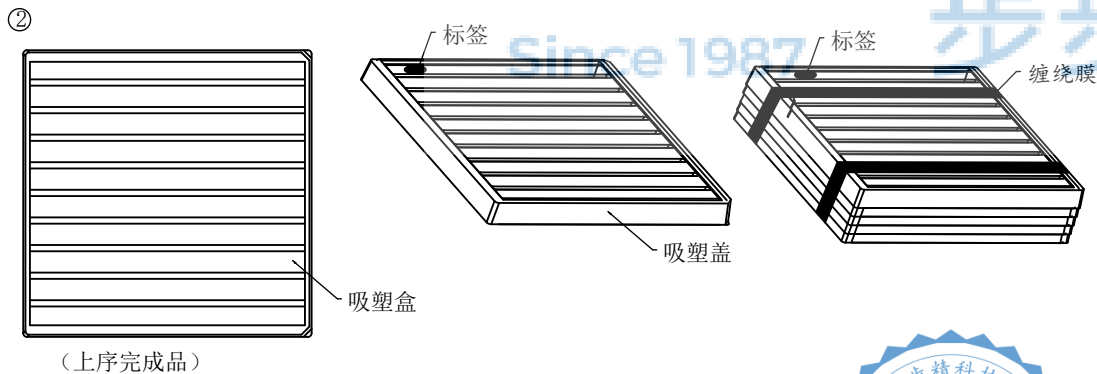

- 三、
- 1、将50个吸塑盒装一箱：
 - 2、每箱数量：（80PCS/盒X50盒）/箱=4000PCS/箱：
 - 3、右上方均贴外箱标签，外箱标签对角处各空5.00CM
 - 4、若有未装满之零箱，必须用填充物填满，外箱标签需注明。
 - 5、标签内容按（包装标签粘贴规范）进行核对

- 二、
- 1、将“上序完成品”左上方贴上ROHS标签、五盒一标签：（如右上图所示）



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0927-1		NAME: 网络接口 RJ45 1x2 8P8C 90度 L=12.0 端子DIP 无灯 无弹 全塑 盒装	
APPD. JM_Zheng		PJ. NO.: 131-2K2-080002-J8G	
CHKD. LYX		SIZE: A4 DRW NO.:	
DR. ZY		FINISH: SEE NOTES MAT'L: SEE NOTES	
		SCALE: N/A REV.: AO UNIT: mm PAGE: 2/2	