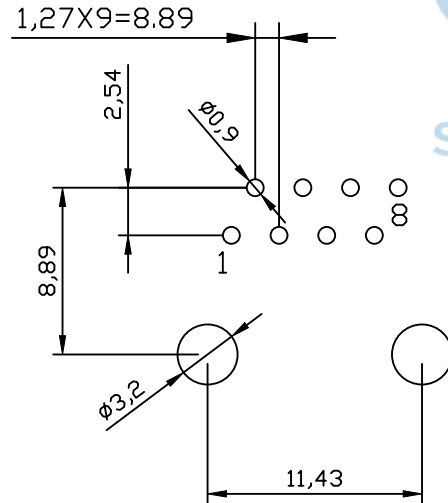
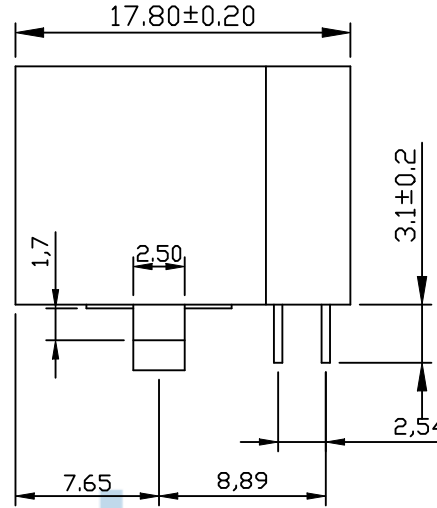
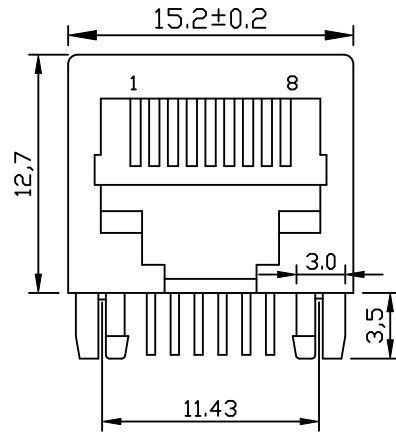


MATERIAL:

HOUSING: PA46, yellow 114C.

TERMINAL: PHOSPHOR BRONZE Ø0.46MM
GOLD PLATING

DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: -40 °C ~ +85 °C.

STORAGE TEMPERATURE: -40 °C ~ +85 °C.

ALL CRITICAL DIMENSIONS WITH "*"

VOLTAGE: 125 VOLTS AC.

CURRENT RATING: 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1MIN.


INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

bbJconn
Since 1987 步步精科技



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38	.X*: ±3*	NAME: 网络接口 RJ45 5621 1x1 10P8C	
.XX: ±0.25	.X*: ±2*	90度 L=17.80 无灯 无弹 全塑 PA46黄胶114C DIP 盒装	
.XXX: ±0.13	.XX*: ±1*		
APPD.	JM_Zheng	 PJ. NO.: △131-2K2-100005-T8G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	ZY	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0067-1		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

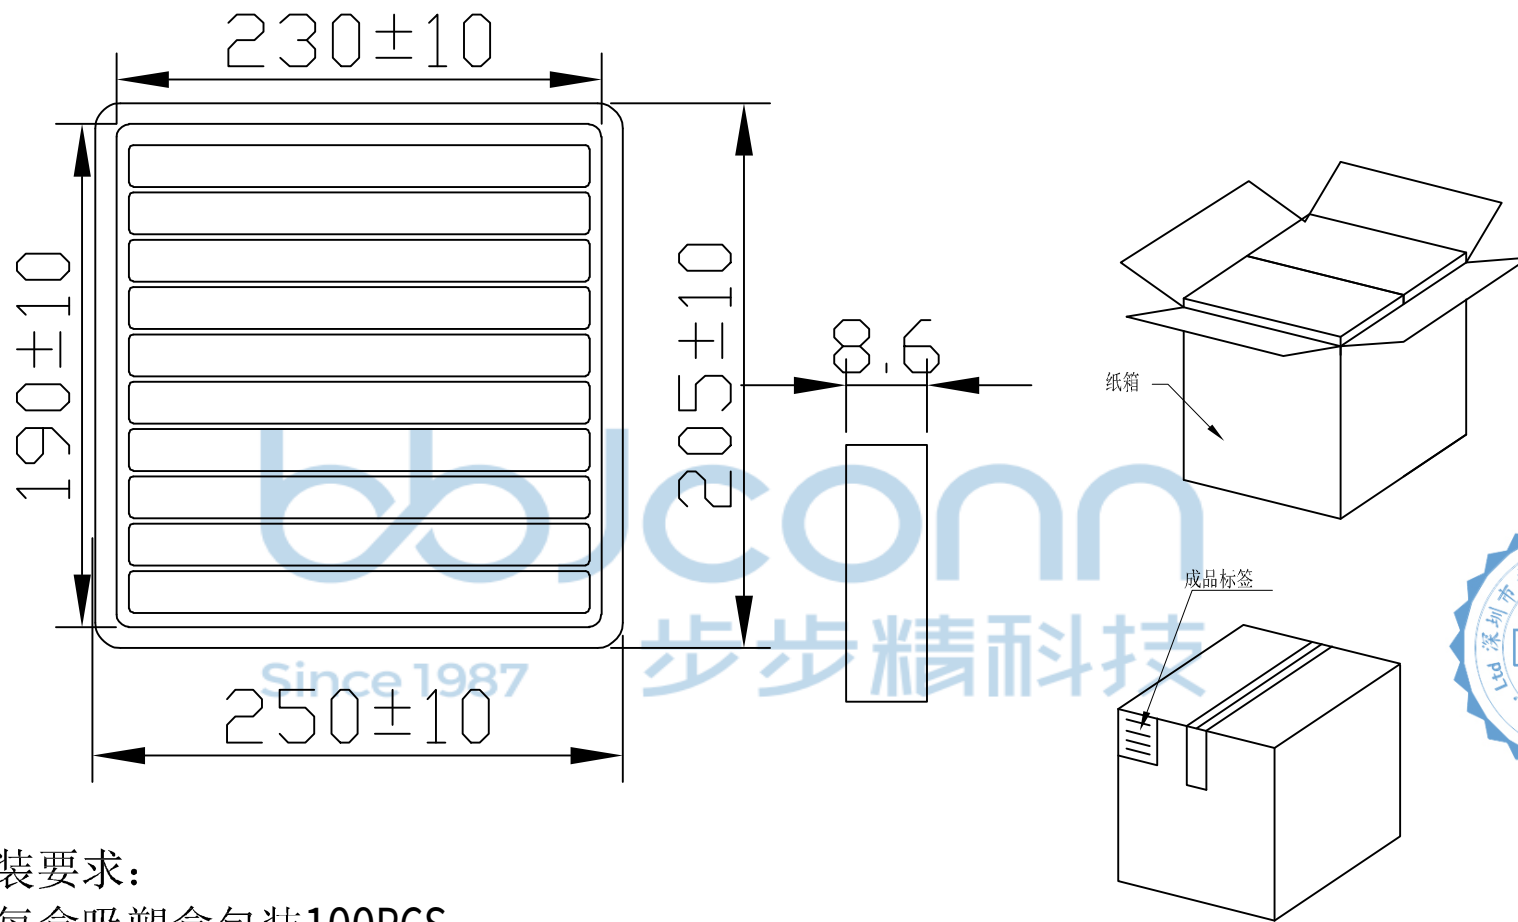

1. 包装要求:
- 1.1 每盒吸塑盒包装100PCS;
 - 1.2 纸箱外贴上标签

纸箱规格: 350*210*290



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ± 0.38	X*: $\pm 3^{\circ}$	NAME: 网络接口 RJ45 5621 1x1 10P8C	
.XX: ± 0.25	.X*: $\pm 2^{\circ}$	90度 L=17.80 无灯 无弹 全塑 PA46黄胶114C DIP 盒装	
.XXX: ± 0.13	.XX*: $\pm 1^{\circ}$		
APPD.	JM_Zheng	PJ. NO.: $\triangle 131-2K2-100005-T8G$	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	ZY	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0067-1		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	