

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

MATERIAL:

HOUSING: PA46, PBT, PA66, BLACK.
TERMINAL: PHOSPHOR BRONZE Ø0.46MM
G/FU GOLD PLATING

MACHANICAL:

DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40 °C ~ +85 °C
STORAGE TEMPERATURE: -40 °C ~ +85 °C.
ALL CRITICAL DIMENSIONS WITH "±"

VOLTAGE: 125 VOLTS AC.

CURRENT RATING: 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1MIN.

INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL

AFTER 500V DC FOR 1 MINUTE.


CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.


LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Yellow	568nm	20mA	1.85-2.45V
Green	568nm	20mA	1.85-2.45V

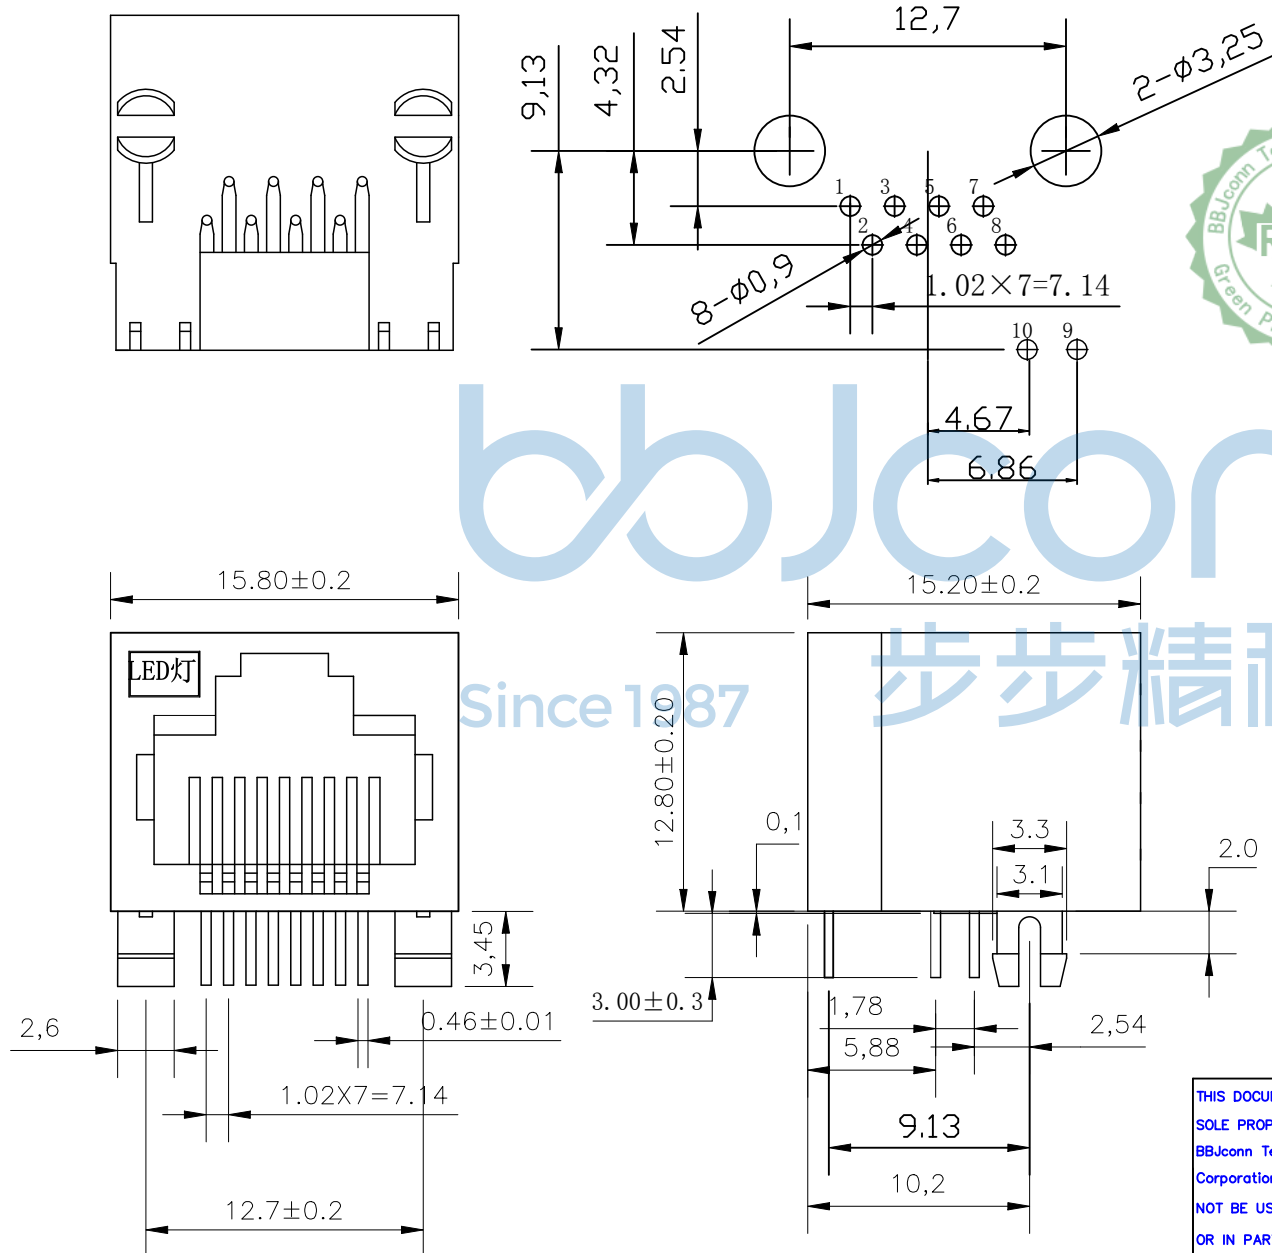

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG, NO: 0067-1

深圳市步步精科技有限公司			
.X: ±0.38	X*: ±3*	NAME: 网络接口 RJ45 56LED 1x1 8P8C 90度 L=15.20 左绿色单灯 无弹 全塑 DIP	
.XX: ±0.25	.X*: ±2*		
.XXX: ±0.13	.XX*: ±1*		
APPD.	JM_Zheng	PJ. NO.: 131-2K2-080001-T8G	
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

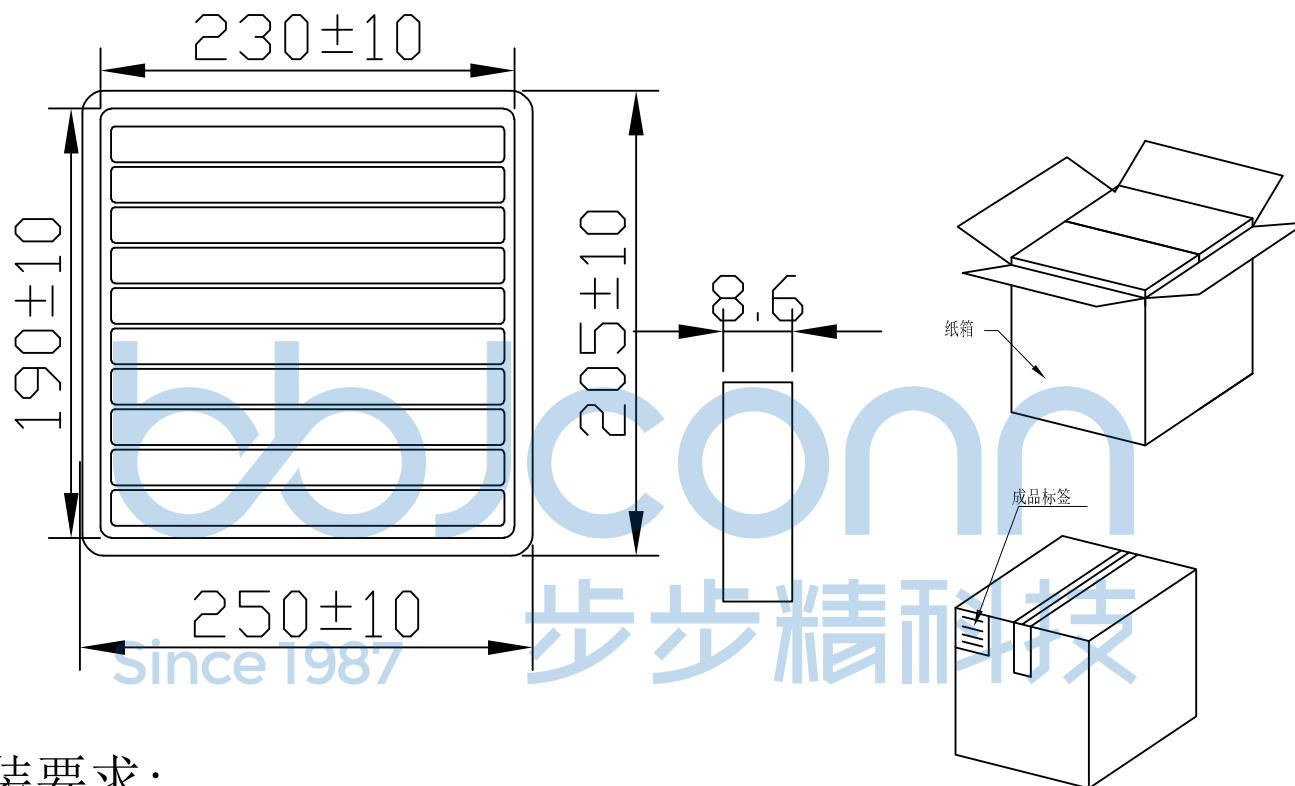

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每50盘放一箱, 共计5000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0067-1		NAME: 网络接口 RJ45 56LED 1x1 8P8C 90度 L=15.20 左绿色单灯 无弹 全塑 DIP	
APPD.	JM_Zheng	PJ. NO.: 131-2K2-080001-T8G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2