

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

MATERIAL:




HOUSING: PA46, PBT, PA66, BLACK.
TERMINAL: PHOSPHOR BRONZE Ø0.46MM
G/FU*GOLD PLATING

SHIELD: C2680, T=0.20MM, 20 MIN NICKEL PLATING
NO ALL AREA

MECHANICAL:

DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40 °C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "M"


VOLTAGE: 125 VOLTS AC.
CURRENT RATING: 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

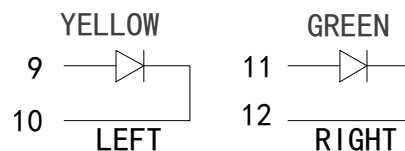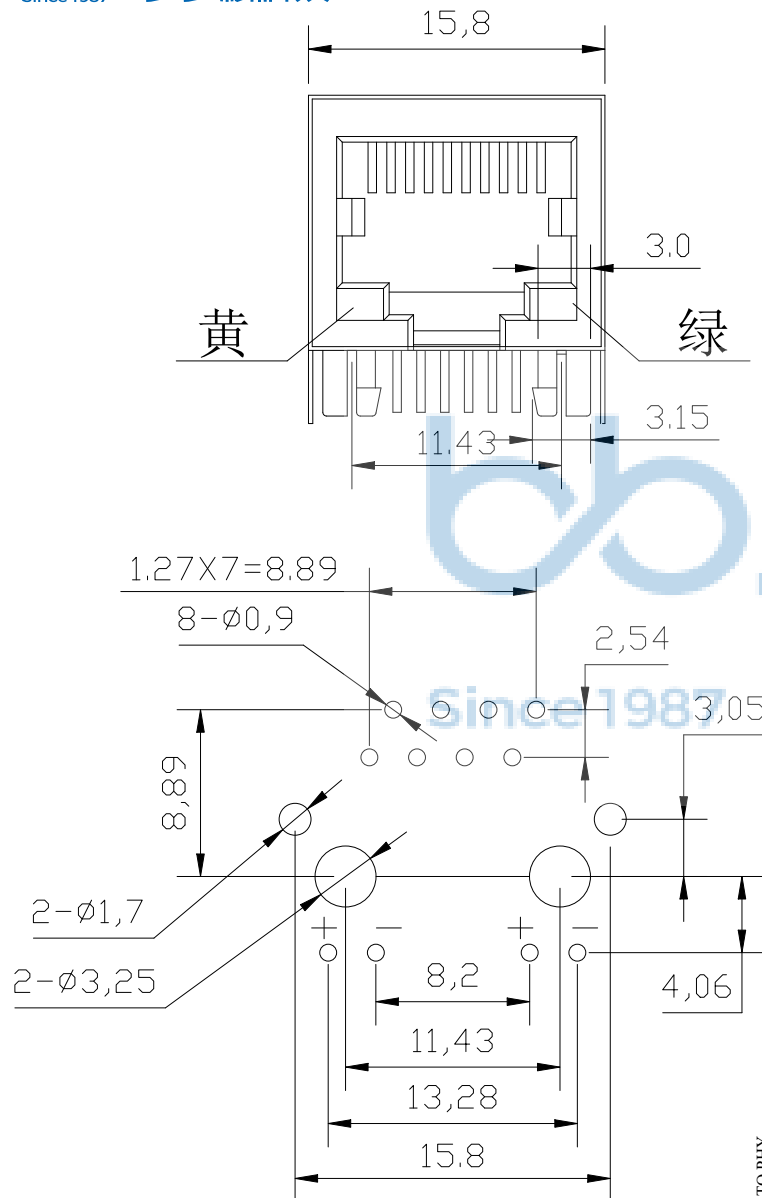

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Yellow	568nm	20mA	1.85-2.45V
Green	585nm	20mA	1.7-2.2V

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38	X*: ±3*	NAME: 网络接口 RJ45 5921 1x1 10P8C 90度		带灯 左黄右绿 无弹 全包 DIP 盒装			
.XX: ±0.25	.X*: ±2*	APPD. JM_Zheng		PJ. NO.: 131-2K2-100002-T8G			
.XXX: ±0.13	.XX*: ±1*	CHKD. LYX		SIZE: A4 DRW NO.:			
PDWG.NO: 0067-1		DR. TSP		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
				SCALE: N/A		REV.: A0	
				UNIT: mm		PAGE: 1/2	

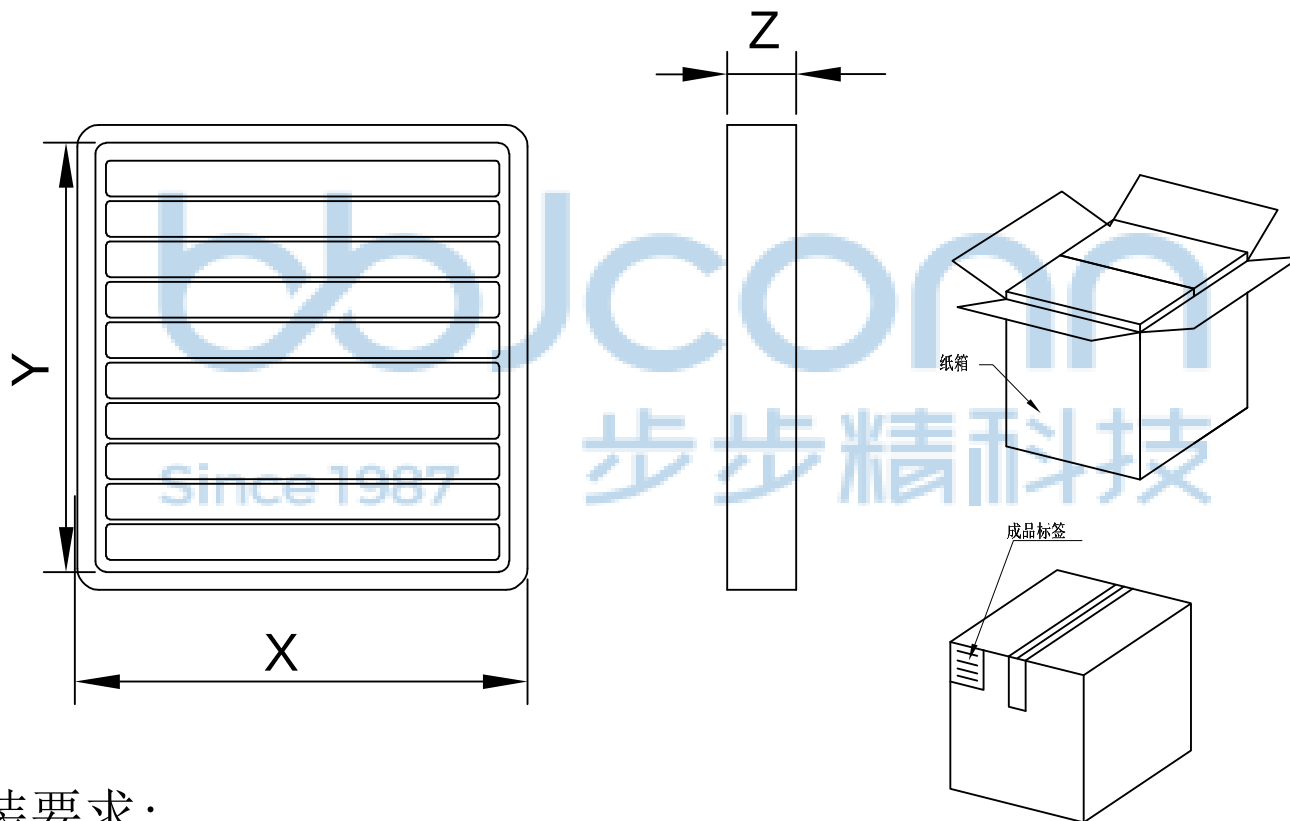

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 每20盘放一箱, 共计2000PCS;
 - 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0067-1		NAME: 网络接口 RJ45 5921 1x1 10P8C 90度 带灯 左黄右绿 无弹 全包 DIP 盒装	
APPD.	JM_Zheng	PJ. NO.: 131-2K2-100002-T8G	
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	GZY	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 2/2