


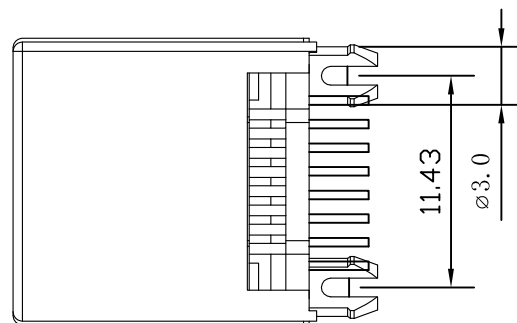

MATERIAL:





HOUSING: PA46, PBT, PA66, BLACK.
TERMINAL: PHOSPHOR BRONZE Ø0.46MM
G/FU" GOLD PLATING

SHIELD: C2680, T=0.20MM, 20 MIN NICKEL PLATING
NO ALL AREA

MACHANICAL:

DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40 °C~+85 °C.
STORAGE TEMPERATURE: -40 °C~+85 °C.
ALL CRITICAL DIMENSIONS WITH "H"




VOLTAGE: 125 VOLTS AC.
CURRENT RATING: 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

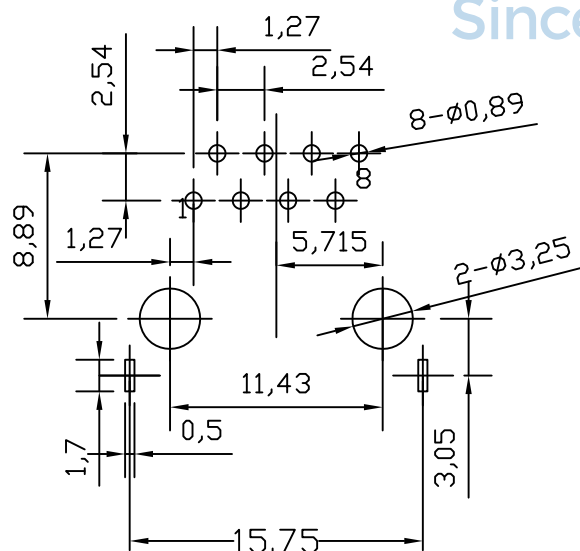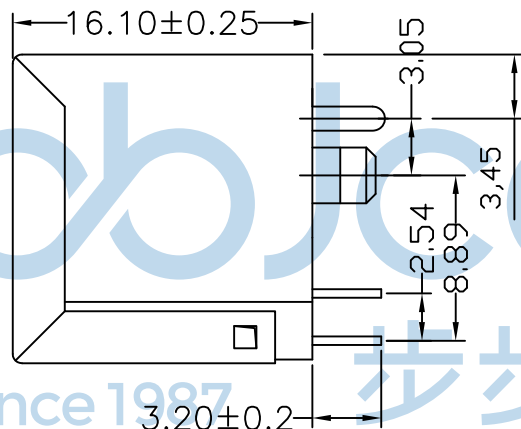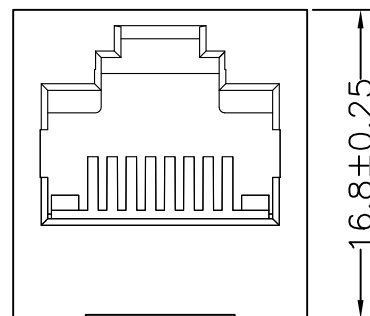

1	○	○	J1
2	○	○	J2
3	○	○	J3
4	○	○	J4
5	○	○	J5
6	○	○	J6
7	○	○	J7
8	○	○	J8



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: 网络接口 RJ45 5224 1x1 8P8C 180度 H=16.10 带屏蔽 前脚3.05 无灯 无弹 全包 DIP 盒装	
.X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		APPD. JM_Zheng CHKD. LYX DR. TSP		PJ. NO.: 131-2K5-080001-T8G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

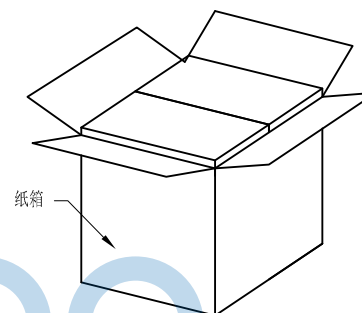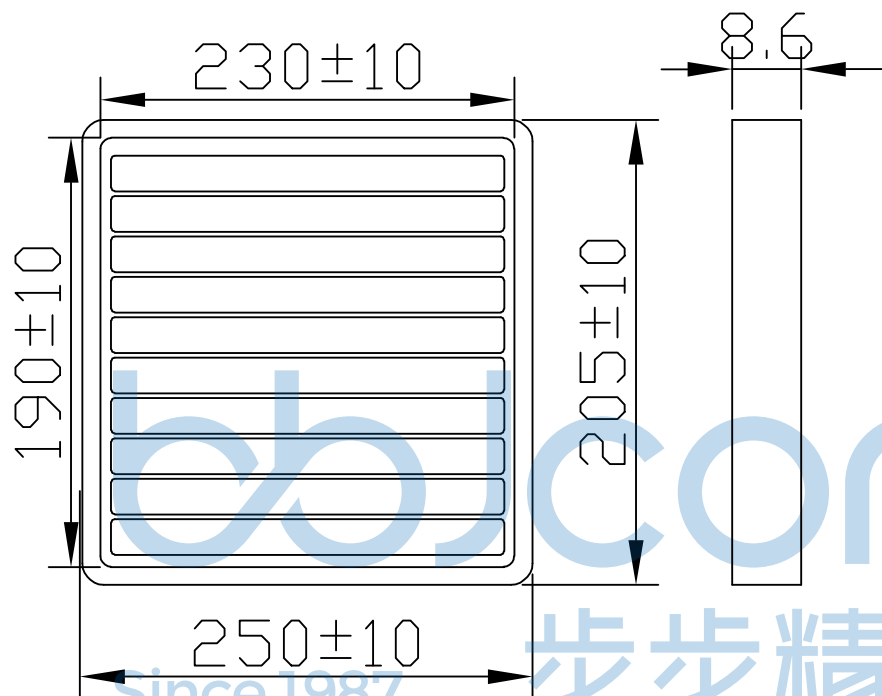

纸箱规格: 350*210*290



1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每30盘放一箱, 共计3000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: 网络接口 RJ45 5224 1x1 8P8C 180度 H=16.10 带屏蔽 前脚3.05 无灯 无弹 全包 DIP 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		PJ. NO.: 131-2K5-080001-T8G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0067-1		DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	