

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTE:

1. MATERIAL:

HOUSING: LCP (UL94V-0), COLOR: NATURAL.

CONTACTS: COPPER ALLOY.

PEG: COPPER ALLOY.

ACTUATOR: LCP (UL94-V0), COLOR: BLACK

2. RATING:

OPERATING VOLTAGE: 50Vrms AC.





CURRENT RATING: 0.5A.

OPERATING TEMPERATURE: -55°C~+85°C.

OPERATING HUMIDITY RANGE: RELATIVE HUMIDITY 90% MAX.(NO CONDENSATION)

STORAGE TEMPERATURE RANGE: -10°C~+50°C.

STORAGE HUMIDITY RANGE: RELATIVE HUMIDITY 90% MAX.(NO CONDENSATION)

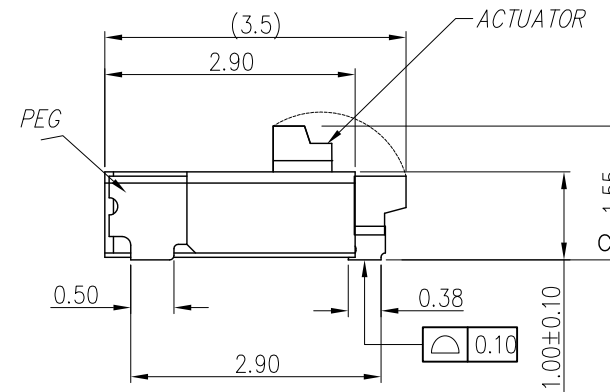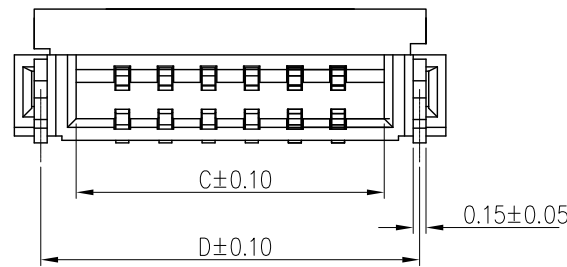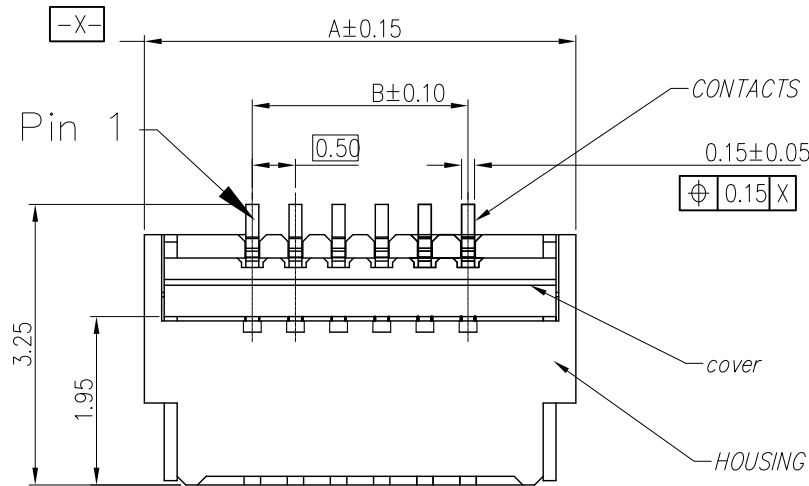



40	22.00	19.50	20.57	21.39	21.10	21.90	20.50
34	19.00	16.50	17.57	18.39	18.10	18.90	17.50
32	18.00	15.50	16.57	17.39	17.10	17.90	16.50
30	17.00	14.50	15.57	16.39	16.10	16.90	15.50
28	16.00	13.50	14.57	15.39	15.10	15.90	14.50
26	15.00	12.50	13.57	14.39	14.10	14.90	13.50
24	14.00	11.50	12.57	13.39	13.10	13.90	12.50
22	13.00	10.50	11.57	12.39	12.10	12.90	11.50
20	12.00	9.50	10.57	11.39	11.10	11.90	10.50
18	11.00	8.50	9.57	10.39	10.10	10.90	9.50
16	10.00	7.50	8.57	9.39	9.10	9.90	8.50
14	9.00	6.50	7.57	8.39	8.10	8.90	7.50
12	8.00	5.50	6.57	7.39	7.10	7.90	6.50
10	7.00	4.50	5.57	6.39	6.10	6.90	5.50
8	6.00	3.50	4.57	5.39	5.10	5.90	4.50
6	5.00	2.50	3.57	4.39	4.10	4.90	3.50
5	4.5	2.00	3.07	3.89	3.60	4.50	3.00
4	4.00	1.50	2.57	3.39	3.10	3.90	2.50
PIN NO.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0938-1

NAME: FPC 0.5-40P 0.6±0.1 H=1.0±0.1	
APPD. JM_Zheng	PJ. NO.: 130-221-400001-J8G
CHKD. LYX	SIZE: A4 DRW NO.:
DR. SGF	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

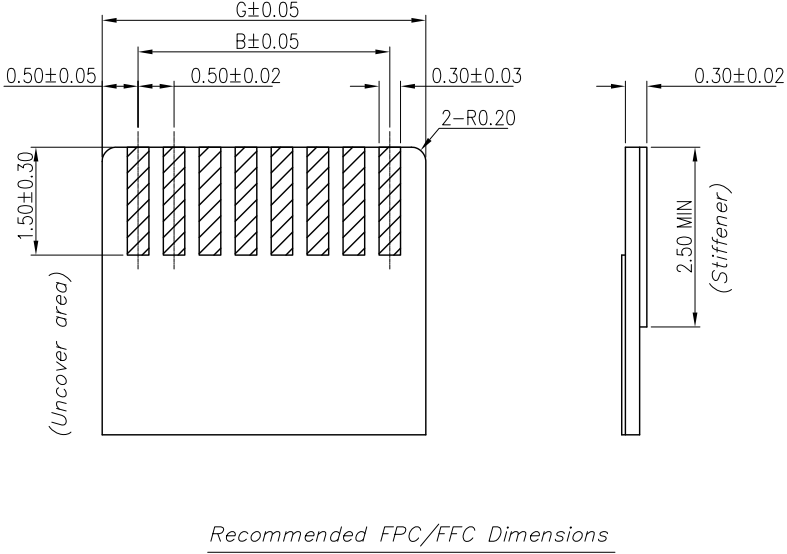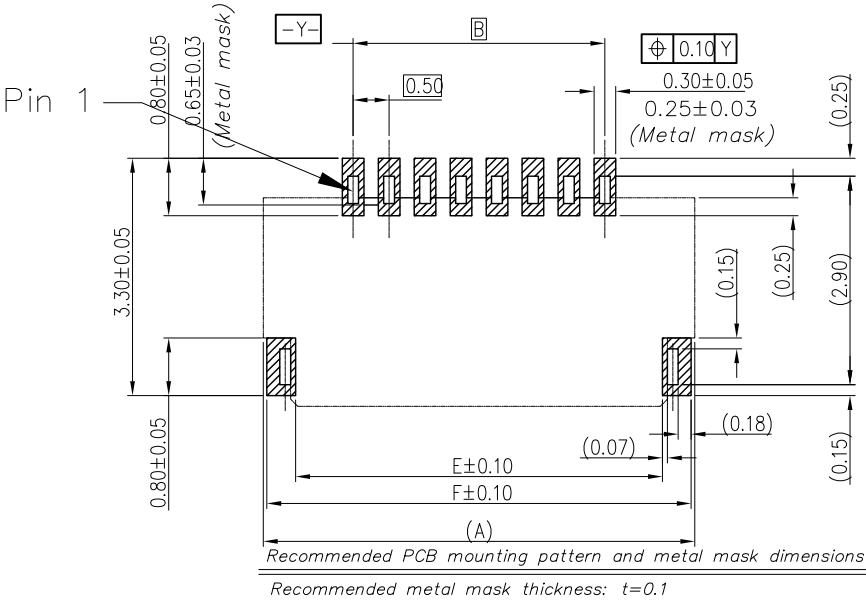


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		.X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: FPC 0.5-40P 0.5±0.1 H=1.0 ±0.1	
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: 130-221-400001-J8G	
PDWG.NO: 0938-1		DR. SGF		SIZE: A4 DRW NO.:	
				FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3	






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness: 0.3 ± 0.05 mm.
5. All dimensions meet EIA-481-B requirements.
6. 4000pcs Pef Reel.
7. For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

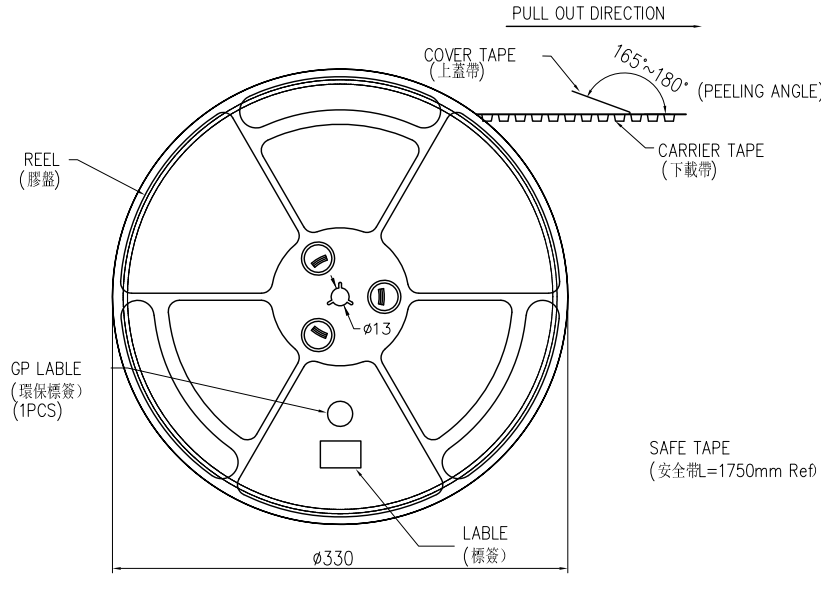

SCALE 1:4

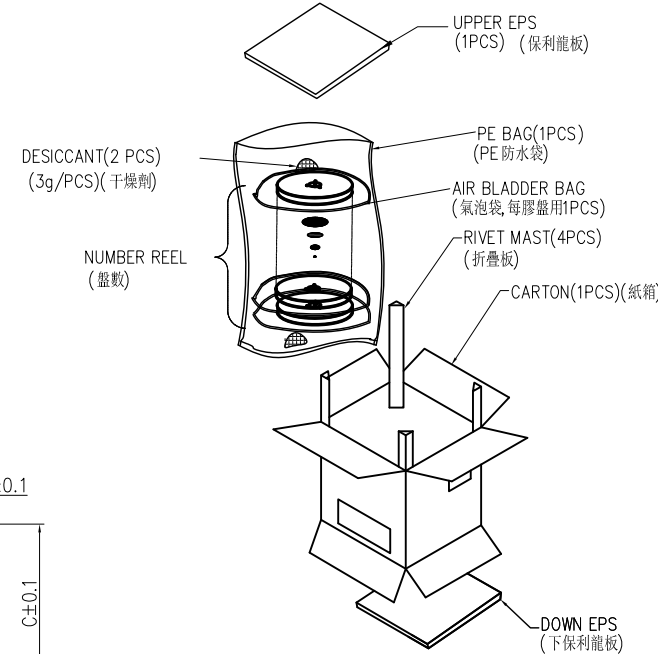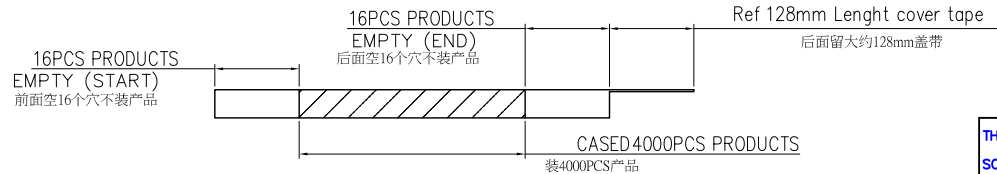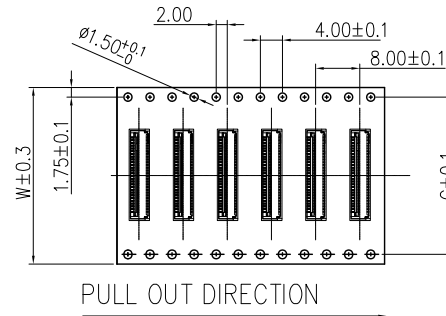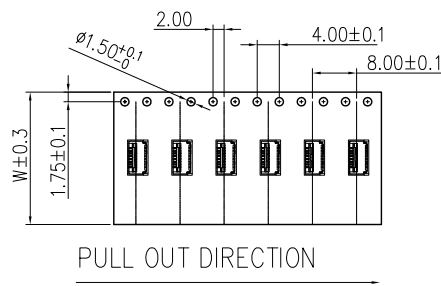

PIN NO.	W	C	PCS /REEL	REEL /CARTON	SUM(PCS)
04PIN~11PIN	16	-	4000	13	52000
12PIN~27PIN	24	-	4000	9	36000
28PIN~39PIN	32	28.4	4000	7	28000
40Pin~50PIN	44	40.4	4000	5	20000

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.		NAME:	
Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		FPC 0.5-40P 后翻式 H=1.0 编带	
APPD.	JM_Zheng	PJ. NO.: 130-221-400001-J8G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG,NO:	0938-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR.	SGF	SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/3	