

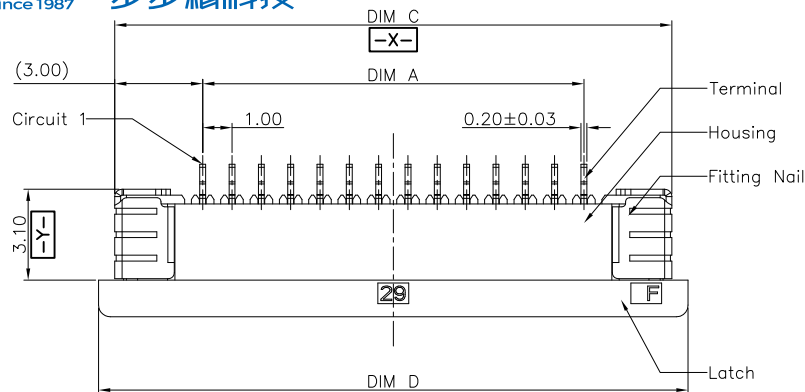
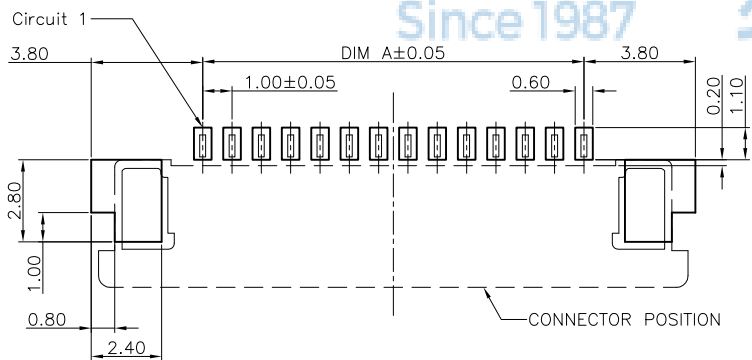



SECTION A-A
SCALE 1:1

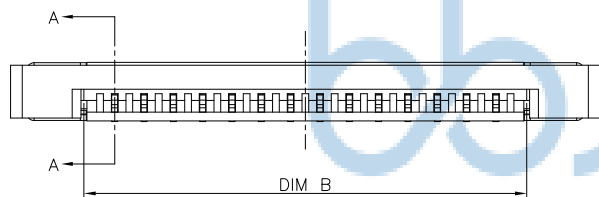

RECOMMENDED P.C.B. PATTERN LAYOUT

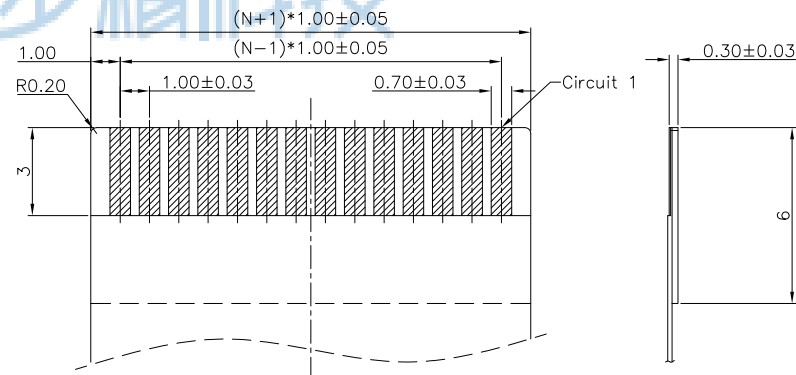

RECOMMENDED FPC/FFC DIMENSION



Note:

- Material:
 - Housing: thermoplastic high temp.UL94V-0; Color: natural.
 - Latch: thermoplastic high temp.UL94V-0; Color: black.
 - Terminal: copper alloy.
 - Fitting Nail: copper alloy.
- Finish:
 - Terminal: Underplating: Au/matt Tin overall.
 - Fitting Nail: Underplating: matt Tin overall.
- Product must comply HF RoHS specification.

CKTS	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
4	3.00	5.10	9.00	10.10		
5	4.00	6.10	10.00	11.10		
6	5.00	7.10	11.00	12.10		
7	6.00	8.10	12.00	13.10		
8	7.00	9.10	13.00	14.10		
9	8.00	10.10	14.00	15.10		
10	9.00	11.10	15.00	16.10	5.20	6.45
11	10.00	12.10	16.00	17.10		
12	11.00	13.10	17.00	18.10		
13	12.00	14.10	18.00	19.10		
14	13.00	15.10	19.00	20.10		
15	14.00	16.10	20.00	21.10		
16	15.00	17.10	21.00	22.10		
17	16.00	18.10	22.00	23.10		
18	17.00	19.10	23.00	24.10		
19	18.00	20.10	24.00	25.10		
20	19.00	21.10	25.00	26.10		
21	20.00	22.10	26.00	27.10		
22	21.00	23.10	27.00	28.10		
23	22.00	24.10	28.00	29.10	5.75	7.00
24	23.00	25.10	29.00	30.10		
25	24.00	26.10	30.00	31.10		
26	25.00	27.10	31.00	32.10		
27	26.00	28.10	32.00	33.10		
28	27.00	29.10	33.00	34.10		
29	28.00	30.10	34.00	35.10		

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0407-1
DR. GZY



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .X': ±1'

NAME:
FPC 1.0-8P 抽拉下接 H=2.0 编带

APPD. JM_Zheng
CHKD. LYX
DR. GZY





PJ. NO.: 130-241-080002-W3G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: AO UNIT: mm PAGE: 1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY




NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE: $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.35 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 24.60METERS.
7. COMPONENT LOAD PER 13" REEL : 2000PCS.
8. PEELING OFF FORCE OF TOP TAPE $0.1\text{N} \sim 0.7\text{N} (10.2\text{gf} \sim 71.4\text{gf})$.

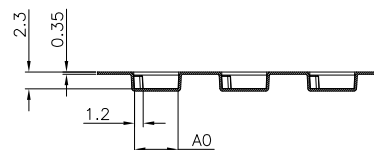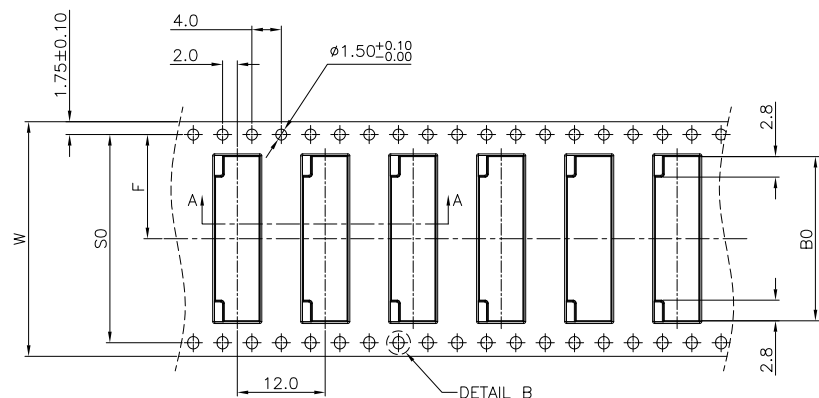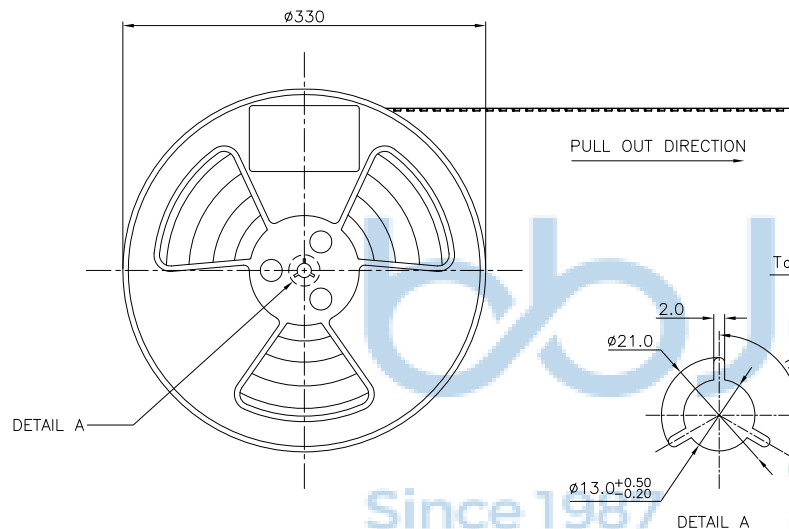

SECTION A-A
SCALE 1:1



DETAIL B
SCALE 5:1



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0407-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

NAME:
FPC 1.0-8P 抽拉下接 H=2.0 编带

APPD. JM_Zheng

PJ. NO.: 130-241-080002-W3G

CHKD. LYX

SIZE: A4 DRW NO.:

DR. GZY

FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

CKTS	B0±0.10	A0±0.10	W	W1	F	S0±0.10
4	7.90					
5	8.40					
6	8.90		16±0.3/-0	16.4	7.5±0.10	
7	9.40					
8	9.90					
9	10.40					
10	10.90					
11	11.40					
12	11.90					
13	12.40					
14	12.90					
15	13.40		24±0.3/-0	24.4	11.5±0.10	
16	13.90					
17	14.40					
18	14.90					
19	15.40	5.95				
20	15.90					
21	16.40					
22	16.90					
23	17.40					
24	17.90					
25	18.40					
26	18.90					
27	19.40		32±0.30	32.4	14.2±0.10	28.4
28	19.90					
29	20.40					
30	20.90					
31	21.40					
32	21.90					
33	22.40					
34	22.90					
35	23.40					
36	23.90					
37	24.40					
38	24.90					
39	25.40					
40	25.90					
41	26.40					
42	26.90					
43	27.40					
44	27.90					
45	28.40		44±0.30	44.4	20.2±0.15	40.4
46	28.90					
47	29.40					
48	29.90	6.50				
49	30.40					
50	30.90					
51	31.40					
52	31.90					
53	32.40					
54	32.90					
55	33.40					
56	33.90					
57	34.40					
58	34.90		56±0.30	56.4	26.2±0.15	52.4
59	35.40					
60	35.90					

单边孔