

Note:

1. Material:
 - 1.1 Housing: LCP,UL94V-0;
 - 1.2 Latch: PA9T,UL94V-0;
 - 1.3 Terminal: C5210.
 - 1.4 Fitting Nail: C2680.






2. Finsh:

- 2.1 Terminal:

50~100u" Nickel under plating over all
I:Gold flash on contact and solder area.
K:3u" Gold on contact and Gold Flash on Solder area.
M:5u" Gold on contact and Gold Flash on Solder area.

- 2.2 Fitting Nail:

50~100u" Nickel under plating over all
80~150u" Matte-Tin over all.
3. Product must comply HF RoHS specification.

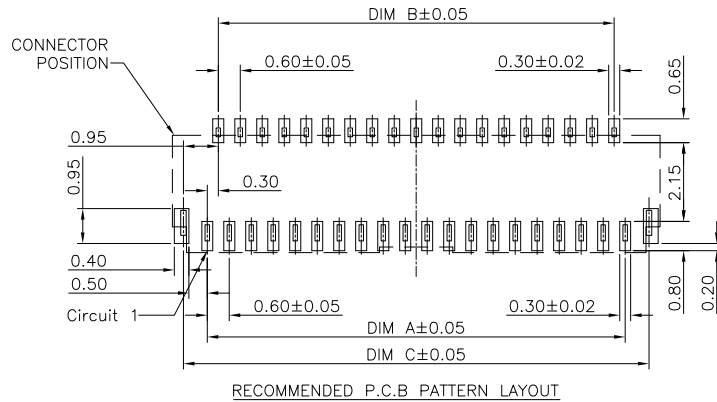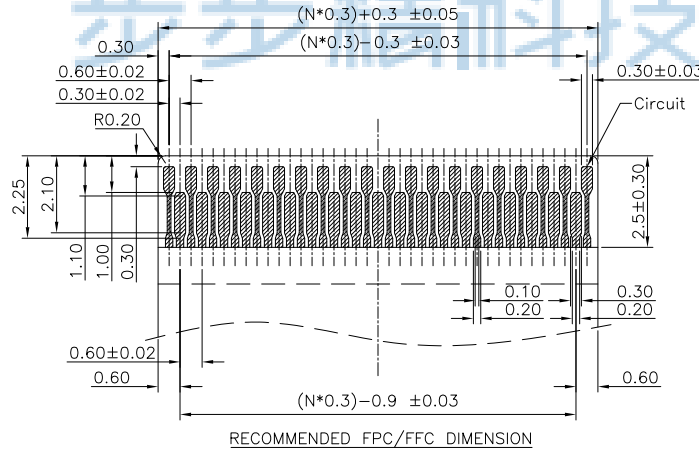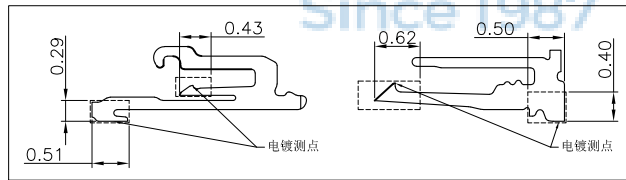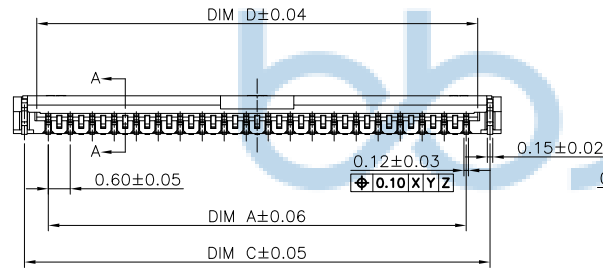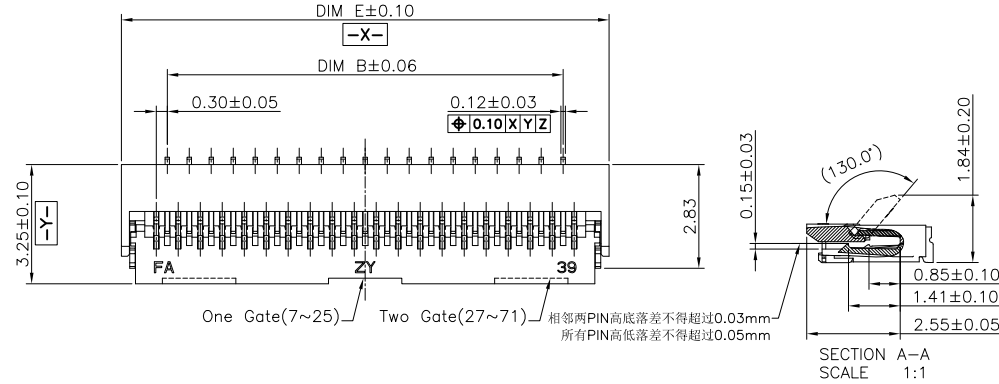

CKTS	DIM A	DIM B	DIM C	DIM D	DIM E
7	1.80	1.20	3.10	2.43	3.70
13	3.60	3.00	4.90	4.23	5.50
15	4.20	3.60	5.50	4.83	6.10
17	4.80	4.20	6.10	5.43	6.70
19	5.40	4.80	6.70	6.03	7.30
21	6.00	5.40	7.30	6.63	7.90
23	6.60	6.00	7.90	7.23	8.50
25	7.20	6.60	8.50	7.83	9.10
27	7.80	7.20	9.10	8.43	9.70
29	8.40	7.80	9.70	9.03	10.30
31	9.00	8.40	10.30	9.63	10.90
33	9.60	9.00	10.90	10.23	11.50
35	10.20	9.60	11.50	10.83	12.10
37	10.80	10.20	12.10	11.43	12.70
39	11.40	10.80	12.70	12.03	13.30
41	12.00	11.40	13.30	12.63	13.90
43	12.60	12.00	13.90	13.23	14.50
45	13.20	12.60	14.50	13.83	15.10
47	13.80	13.20	15.10	14.43	15.70
49	14.40	13.80	15.70	15.03	16.30
51	15.00	14.40	16.30	15.63	16.90
53	15.60	15.00	16.90	16.23	17.50
55	16.20	15.60	17.50	16.83	18.10
57	16.80	16.20	18.10	17.43	18.70
59	17.40	16.80	18.70	18.03	19.30
61	18.00	17.40	19.30	18.63	19.90
63	18.60	18.00	19.90	19.23	20.50
65	19.20	18.60	20.50	19.83	21.10
67	19.80	19.20	21.10	20.43	21.70
69	20.40	19.80	21.70	21.03	22.30
71	21.00	20.40	22.30	21.63	22.90



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0407-1



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME:
FPC 0.3-25P 翻盖下接 H=1.0 SMT 编带

APPD. JM_Zheng

PJ. NO.: 130-2X1-250002-W3G

CHKD. LYX

SIZE: A4 DRW NO.:









DR. GZY

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: AO UNIT: mm PAGE: 1/2



1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE.±0.20mm
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: 0.30 ± 0.05 mm.
6. PACKING LENGTH PER 13" REEL : 40.40METERS.
7. COMPONENT LOAD PER 13" REEL : 5000PCS.
8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~71.4gf).

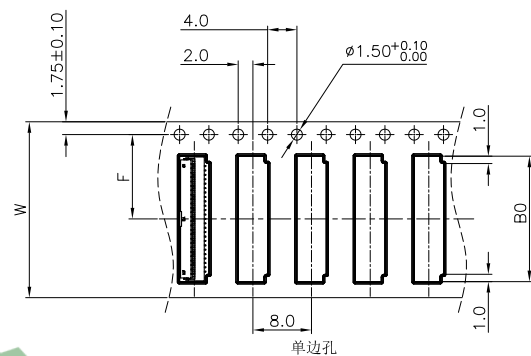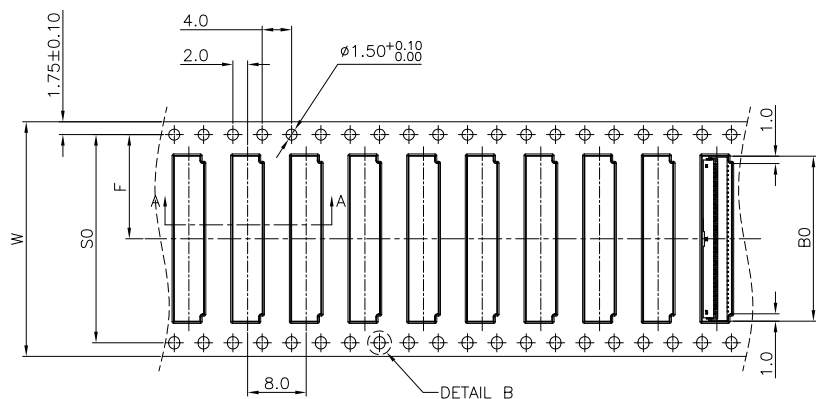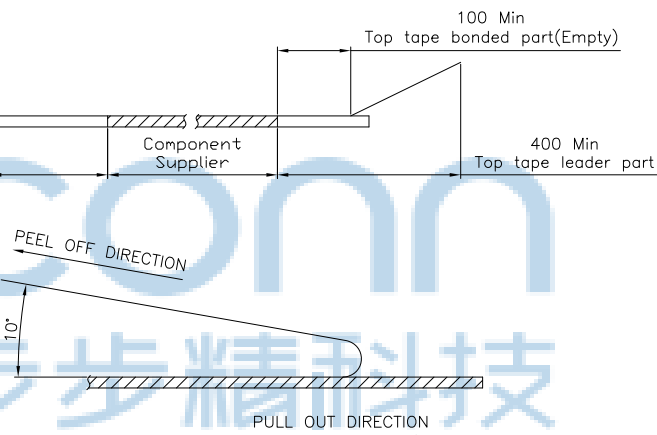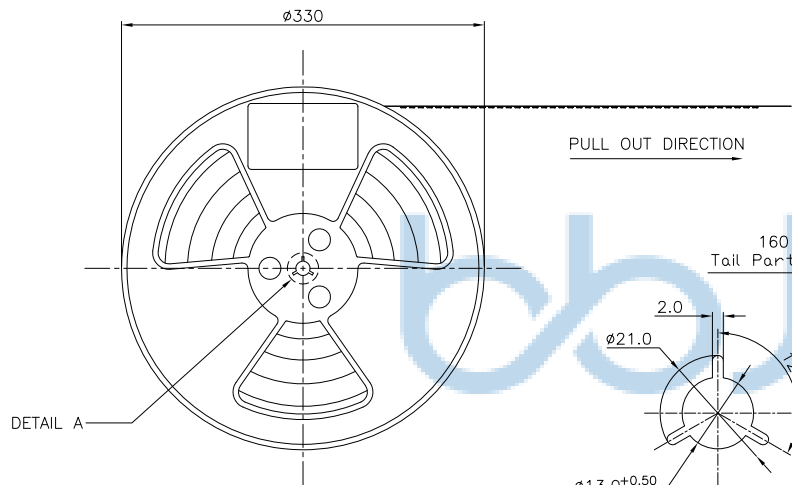

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0407-1



深圳市步步精科技有限公司

.X: ± 0.38	X': $\pm 3^\circ$
.XX: ± 0.25	.X': $\pm 2^\circ$
.XXX: ± 0.13	.XX': $\pm 1^\circ$

NAME:
FPC 0.3-25P 翻盖下接 H=1.0 SMT 编带

APPD.	JM_Zheng
-------	----------

	PJ. NO.: 130-2X1-250002-W3G
--	-----------------------------

CHKD.	LYX
-------	-----

	SIZE: A4	DRW NO.:
	FINISH: SEE NOTES	MAT'L: SEE NOTES

DR.	GZY
-----	-----

FINISH: SEE NOTES	
SCALE: N/A	REV: A

FINISH: SEE NOTES		MAT'L: SEE NOTES	
SCALE: N/A	REV: A0	UNIT: mm	PAGE: 2/2

CKTS	B0±0.10	#	#1	F±0.10	S0±0.10
7	3.90	16±0.3/-0	16.4	7.5	单边孔
9	4.50				
11	5.10				
13	5.70				
15	6.30				
17	6.90				
19	7.50				
21	8.10				
23	8.70				
25	9.30				
27	9.90	24±0.3/-0	24.4	11.5	
29	10.50				
31	11.10				
33	11.70				
35	12.30				
37	12.90				
39	13.50				
41	14.10				
43	14.70				
45	15.30				
47	15.90	32±0.30	32.4	14.2	
49	16.50				
51	17.10				
53	17.70				
55	18.30				
57	18.90				
59	19.50				
61	20.10				
63	20.70				
65	21.30				
67	21.90	44±0.30	44.4	20.2	
69	22.50				
71	23.10	44±0.30	44.4	20.2	40.4