


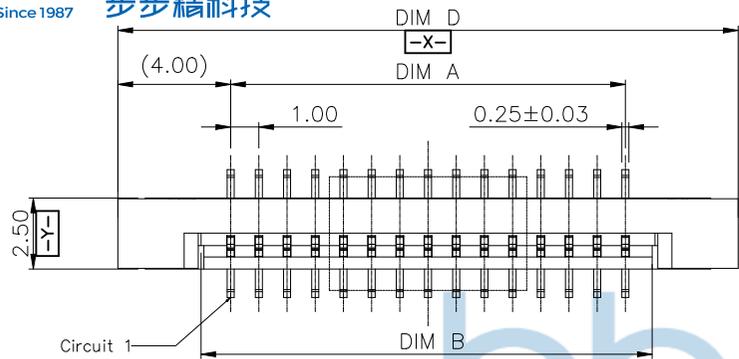
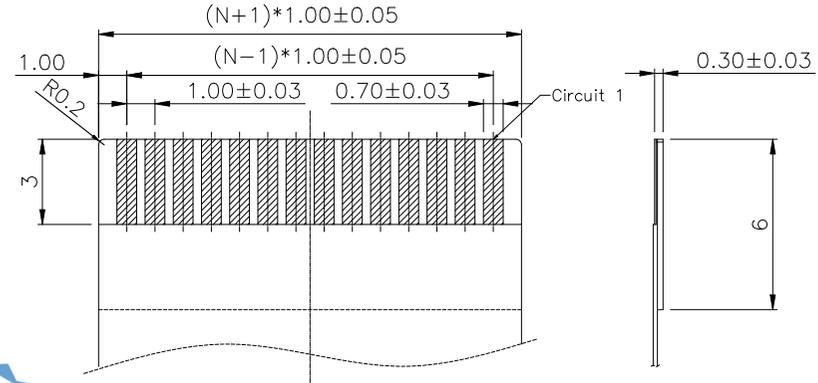
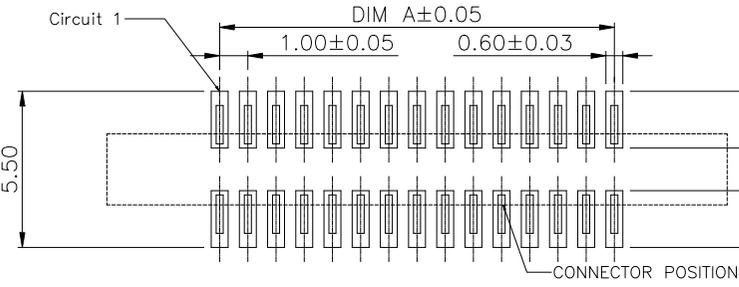
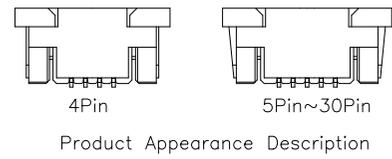


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

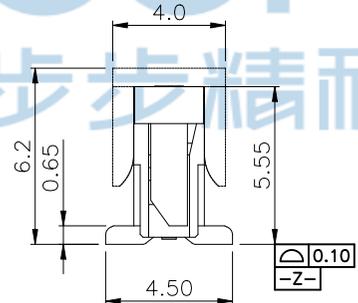

Note:
 1. Material:
 1.1 Housing: thermoplastic high temp.UL94V-0; Color: natural.
 1.2 Latch: thermoplastic high temp.UL94V-0; Color: black.
 1.3 Terminal: copper alloy.
 1.4 Cover: thermoplastic high temp.UL94V-0; Color: black.
 2. Finish:
 2.1 Terminal:
 Underplating: Au/matte Tin overall.
 3. Product must comply HF RoHS specification.

CKTS	DIM A	DIM B	DIM C	DIM D
4	3.00	5.10	9.05	11.00
5	4.00	6.10	10.05	12.00
6	5.00	7.10	11.05	13.00
7	6.00	8.10	12.05	14.00
8	7.00	9.10	13.05	15.00
9	8.00	10.10	14.05	16.00
10	9.00	11.10	15.05	17.00
11	10.00	12.10	16.05	18.00
12	11.00	13.10	17.05	19.00
13	12.00	14.10	18.05	20.00
14	13.00	15.10	19.05	21.00
15	14.00	16.10	20.05	22.00
16	15.00	17.10	21.05	23.00
17	16.00	18.10	22.05	24.00
18	17.00	19.10	23.05	25.00
19	18.00	20.10	24.05	26.00
20	19.00	21.10	25.05	27.00
21	20.00	22.10	26.05	28.00
22	21.00	23.10	27.05	29.00
23	22.00	24.10	28.05	30.00
24	23.00	25.10	29.05	31.00
25	24.00	26.10	30.05	32.00
26	25.00	27.10	31.05	33.00
27	26.00	28.10	32.05	34.00
28	27.00	29.10	33.05	35.00
29	28.00	30.10	34.05	36.00
30	29.00	31.10	35.05	37.00

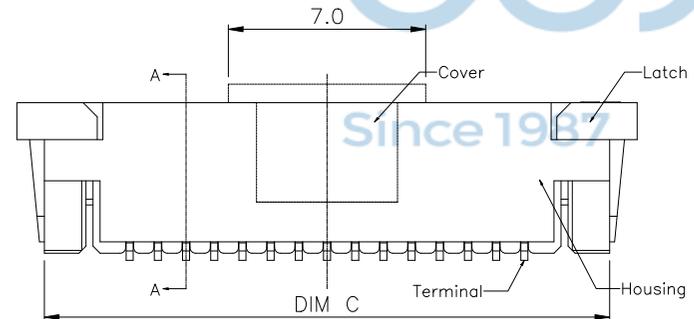

RECOMMENDED P.C.B PATTERN LAYOUT



RECOMMENDED FPC/FFC DIMENSION

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO:0407-1

深圳市步步精科技有限公司

NAME: FPC 1.0-7P 正位立贴 H=5.55 加盖编带 (AFA10)

PJ NO:130-244-070001-W3G

SIZE:A4 | DRW NO:






FINISH:SEE NOTES | MAT'L:SEE NOTES

SCALE:N/A | REV:A0 | UNIT:mm | PAGE:1/2


APPD	JM_Zheng
CHKD	Tang
DR	LYX

REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	LYX

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE.±0.20mm
 2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
 3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
 4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
 5. THICKNESS: 0.50 ± 0.05 mm.
 6. PACKING LENGTH PER 13" REEL:10.20METERS.
 7. COMPONENT LOAD PER 13" REEL:800PCS
 8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~71.4gf).

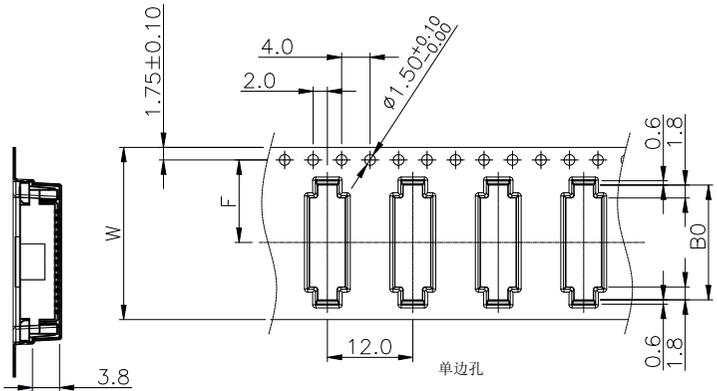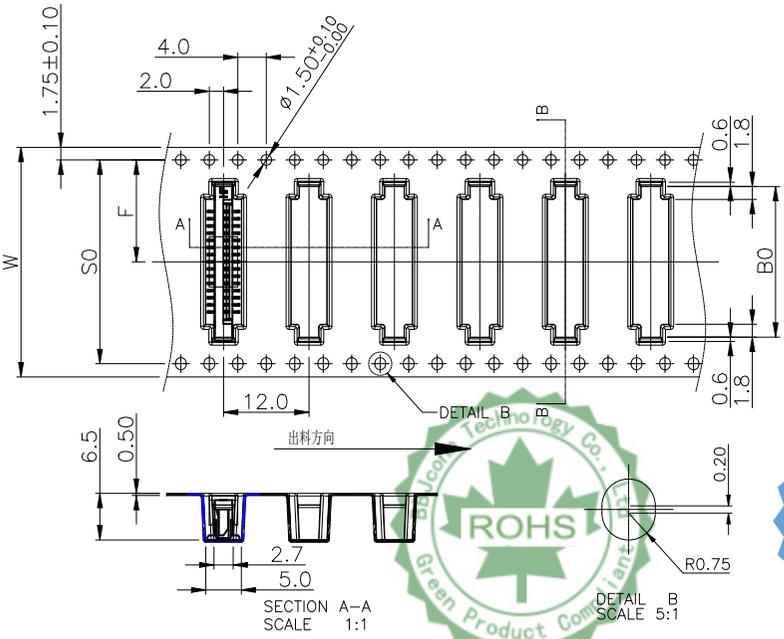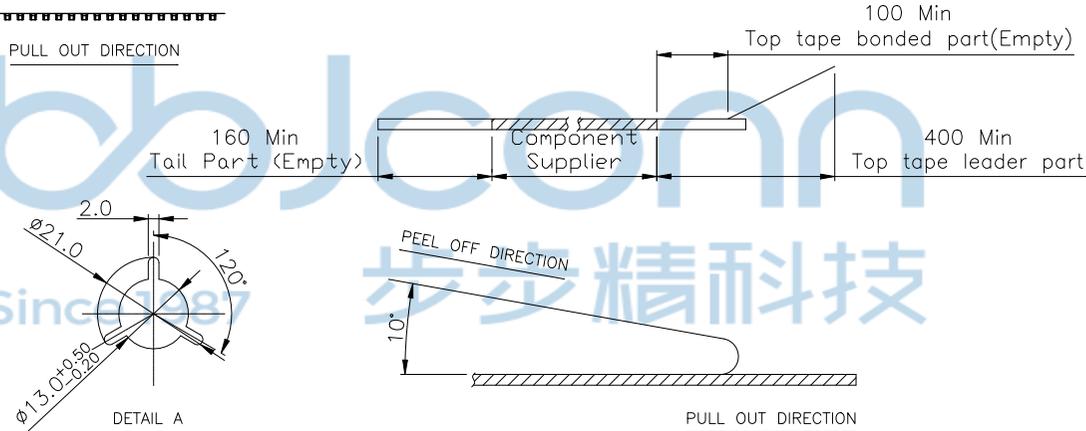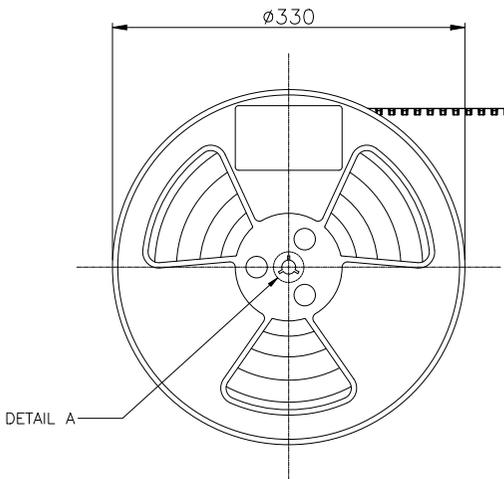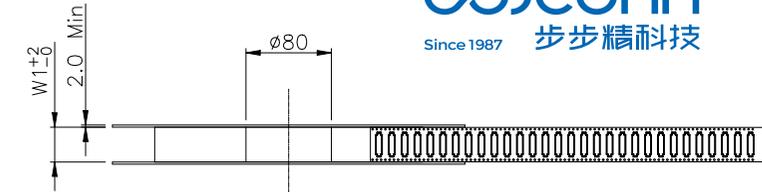

CKTS	B0±0.10	W	W1	F	S0±0.10
4	10.00				
5	11.00				
6	12.00	24±0.15	24.4	11.5±0.10	单边孔
7	13.00				
8	14.00				
9	15.00				
10	16.00	32±0.30	32.4	14.2±0.10	28.4
11	17.00				
12	18.00				
13	19.00				
14	20.00				
15	21.00	44±0.30	44.4	20.2±0.15	40.4
16	22.00				
17	23.00				
18	24.00				
19	25.00				
20	26.00				
21	27.00				
22	28.00				
23	29.00	56±0.30	56.4	26.2±0.15	52.4
24	30.00				
25	31.00				
26	32.00				
27	33.00				
28	34.00				
29	35.00				
30	36.00				



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.

PDWG NO: 0407-1

DR LYX

深圳市步步精科技有限公司

NAME: FPC 1.0-7P 正位立贴 H=5.55 加盖编带 (AFA10)

PJ NO:130-244-070001-W3G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2