





适用线路板 (PCB LAYOUT)


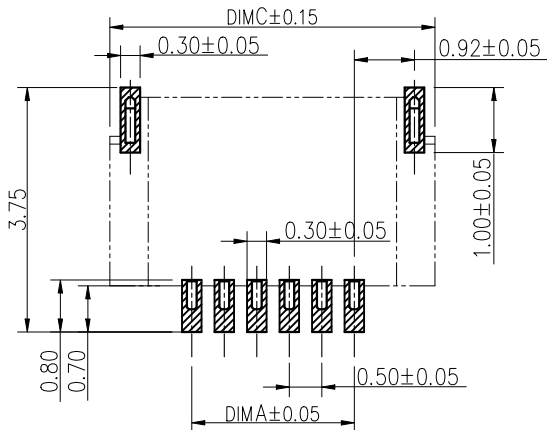


技术指标 (Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
3. 额定电压 (Rated voltage): 50V, AC/DC (=等效).
4. 接触电阻 (Contact resistance): $\leq 0.03\Omega$.
5. 绝缘电阻 (Insulation resistance): $\geq 500\Omega$.
6. 产品料号 (Product material No.):

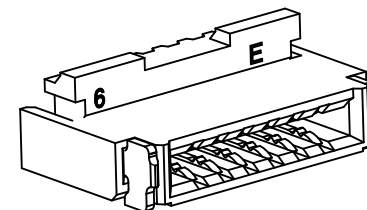


SECTION A-A

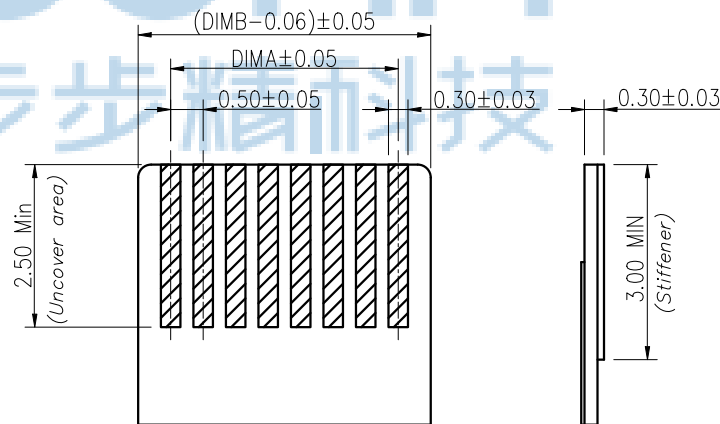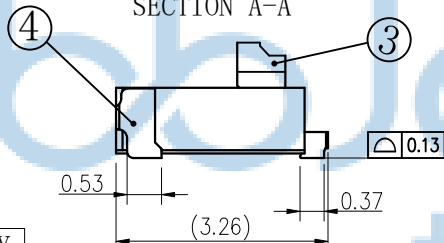

适用扁平线 (Applicable Flat Cable)

CKT	DIMA	DIMB	DIMC	DIMD
4	1.50	2.56	4.00	3.37
5	2.00	3.06	4.50	3.87
6	2.50	3.56	5.00	4.37
8	3.50	4.56	6.00	5.37
10	4.50	5.56	7.00	6.37
12	5.50	6.56	8.00	7.37
14	6.50	7.56	9.00	8.37
16	7.50	8.56	10.00	9.37
18	8.50	9.56	11.00	10.37
20	9.50	10.56	12.00	11.37
22	10.50	11.56	13.00	12.37
24	11.50	12.56	14.00	13.37
26	12.50	13.56	15.00	14.37
28	13.50	14.56	16.00	15.37
30	14.50	15.56	17.00	16.37
32	15.50	16.56	18.00	17.37
34	16.50	17.56	19.00	18.37
40	19.50	20.56	22.00	21.37

SECTION B-B




序号 NO.	品名 TITLE	材质 material	THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0456-1
①	胶芯	LCP UL94V-0 本色	
②	端子	铜合金/表面镀锡	
③	后盖	LCP UL94V-0 黑色	
④	焊片	铜合金/表面镀锡	

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$ X': $\pm 2'$ X': $\pm 1'$	NAME: FPC 0.5-28P 后翻式 H=1.0 编带
APPD CHKD DR	JM_Zheng LYX SGF	PJ NO: 130-221-280001-X3G SIZE: A4 FINISH: SEE NOTES SCALE: N/A
		DRW NO: MAT'L: SEE NOTES REV: A0 UNIT: mm
		PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

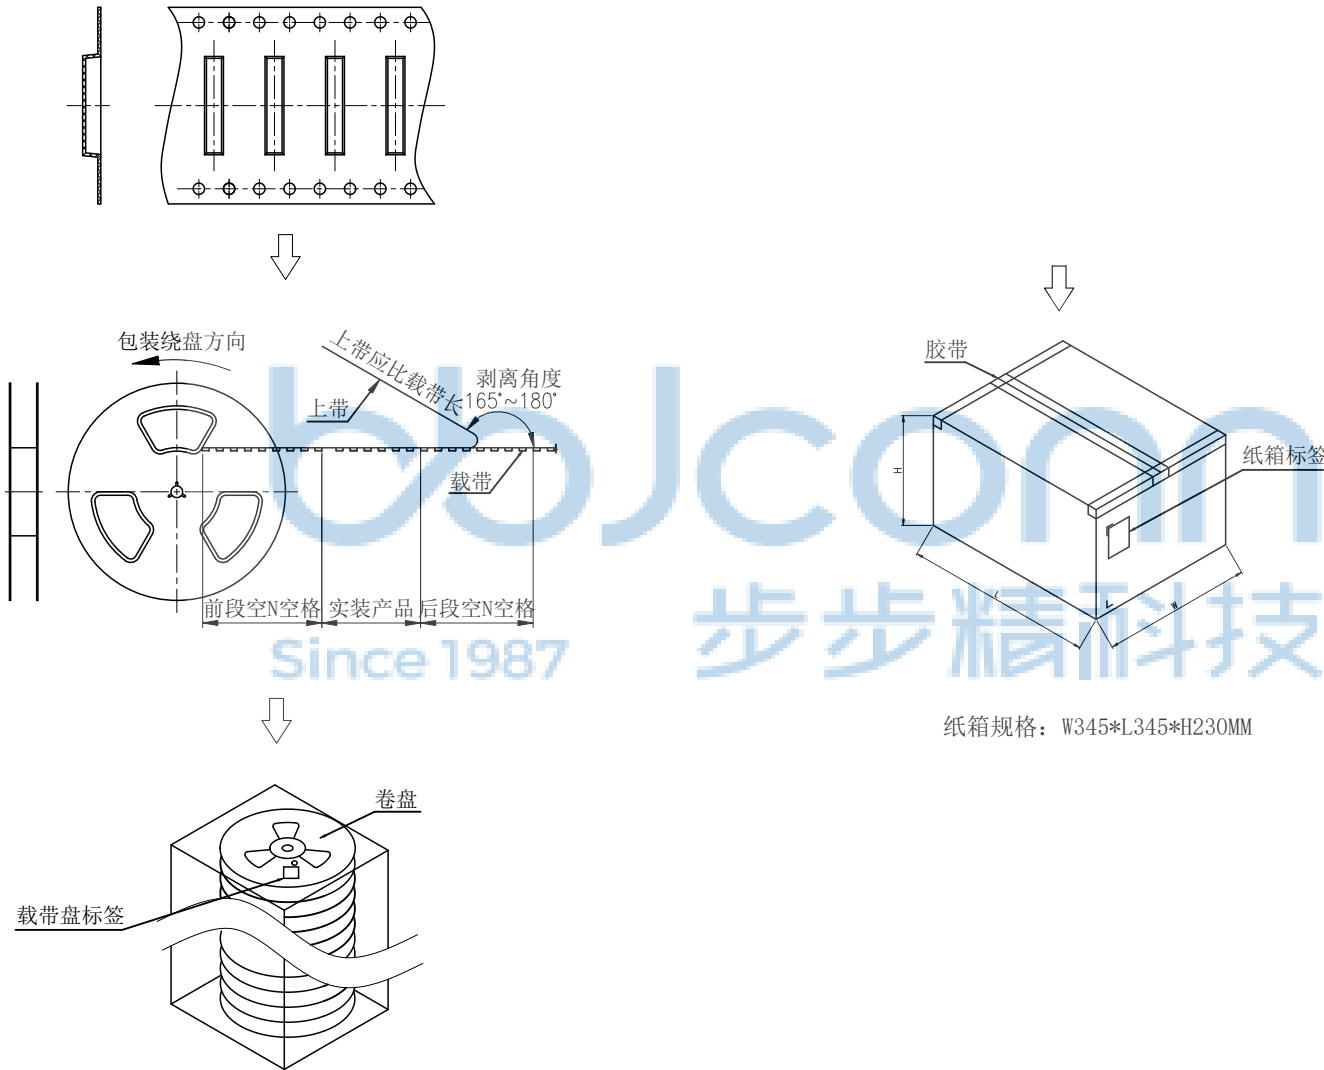

备注:

- 1、包装数量：4000/PCS/卷，10卷/箱。
- 2、包装袋长度：每卷前后各空10-20个空格，中间包装。
- 3、材质：
载体：聚丙烯（PS），阻抗 $10^{6-9} \Omega$
上带：聚乙烯（PET），阻抗 $10^{6-11} \Omega$
卷盘：聚苯乙烯。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0456-1		深圳市步步精科技有限公司		NAME: FPC 0.5-28P 后翻式 H=1.0 编带	
.X: ± 0.38	X': $\pm 3'$	APPD JM_Zheng		PJ NO: 130-221-280001-X3G	
.XX: ± 0.25	X': $\pm 2'$	CHKD LYX		SIZE:A4 DRW NO:	
.XXX: ± 0.13	.XX': $\pm 1'$	DR SGF		FINISH:SEE NOTES MAT'L:SEE NOTES	
				SCALE:N/A REV: A0 UNIT:mm PAGE: 2/2	