
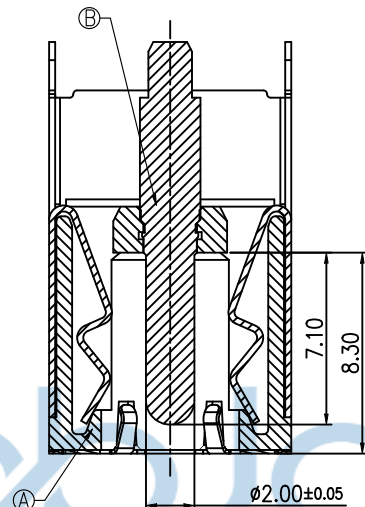






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release		LYX

SPECIFICATION:


1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

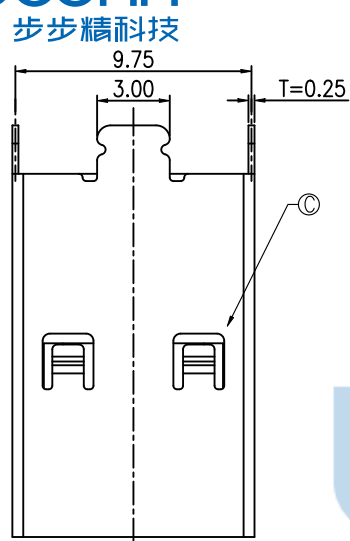



SECTION A-A

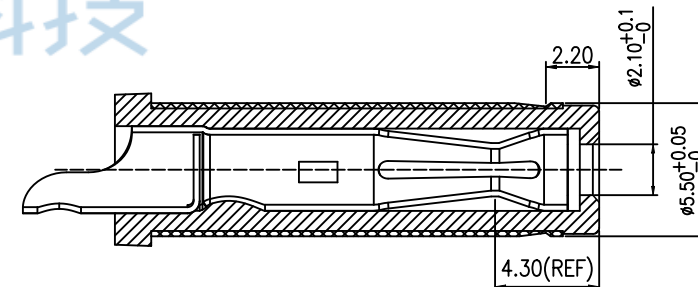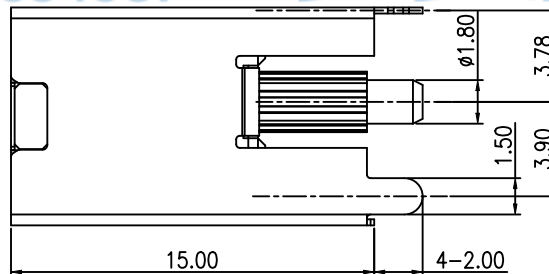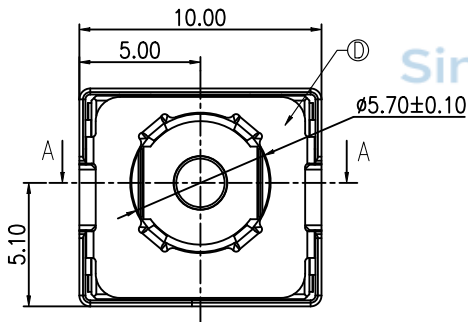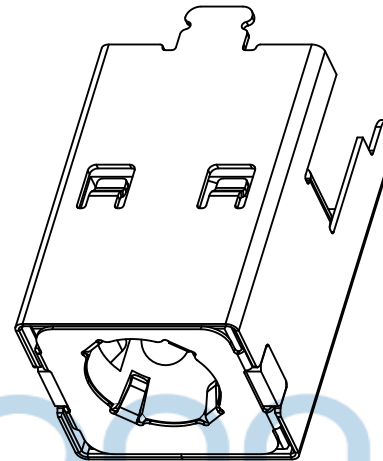

MATING PLUG

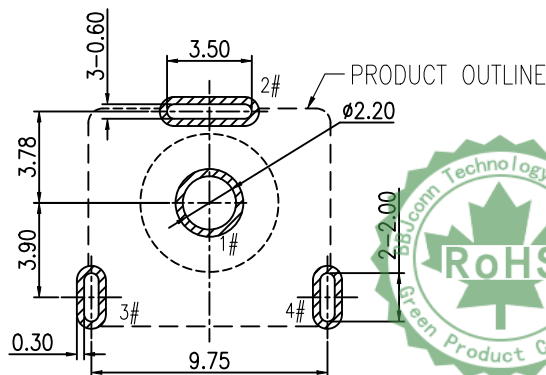

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05




E	COVER			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0386-2


.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		NAME: DC插座 DC550200-1386-20000H 2.0针 180度 H=15.0 三脚插 全铜 加盖编带	
APPD.	JM_Zheng	PJ. NO.:116-309-030004-P1G		SIZE: A4 DRW NO.:	
CHKD.	TSP	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	LYX	SCALE: N/A		REV.: A0 UNIT: mm PAGE: 1/3	

深圳市步步精科技有限公司





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release		LYX

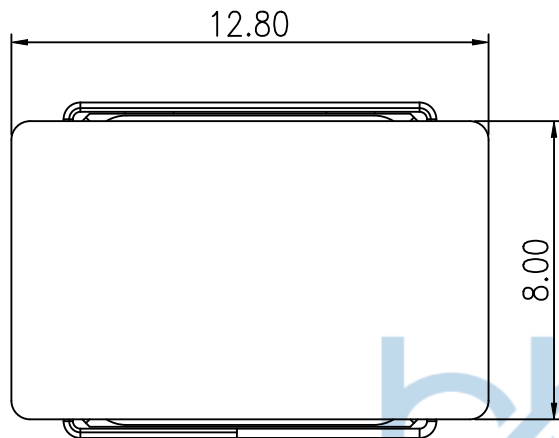

WITH CAP

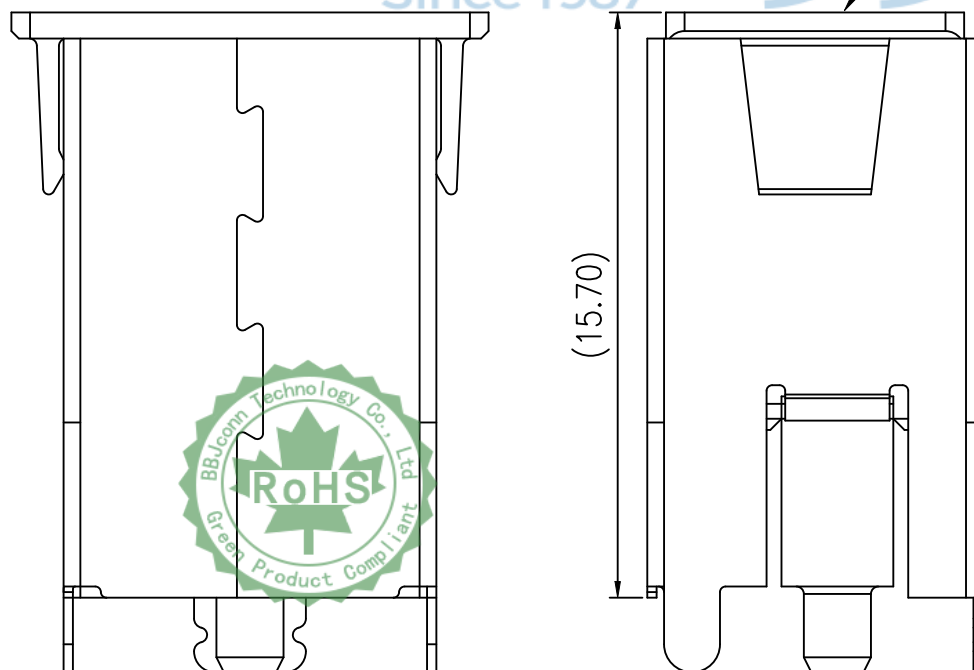

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0386-2		深圳市步步精科技有限公司			
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
	NAME: DC插座 DC550200-1386-20000H 2.0针 180度 H=15.0 三脚插 全铜 加盖编带				
	APPD.	JM_Zheng		PJ. NO.:116-309-030004-P1G	
	CHKD.	TSP		SIZE: A4 DRW NO.:	
	DR.	LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/3

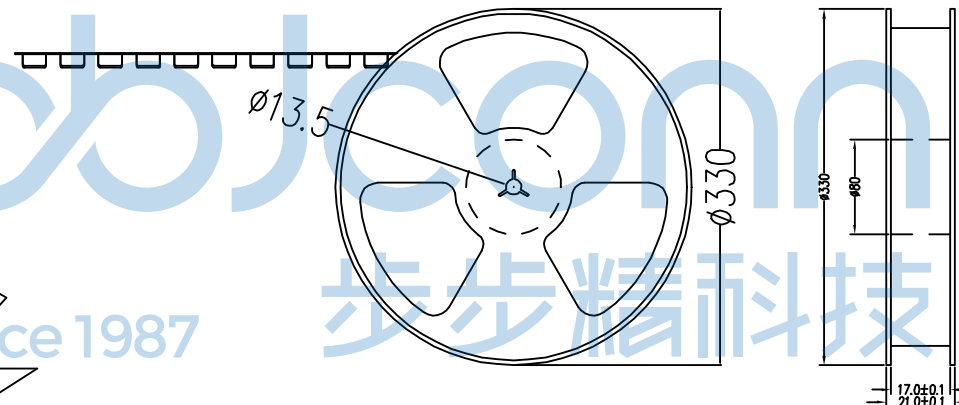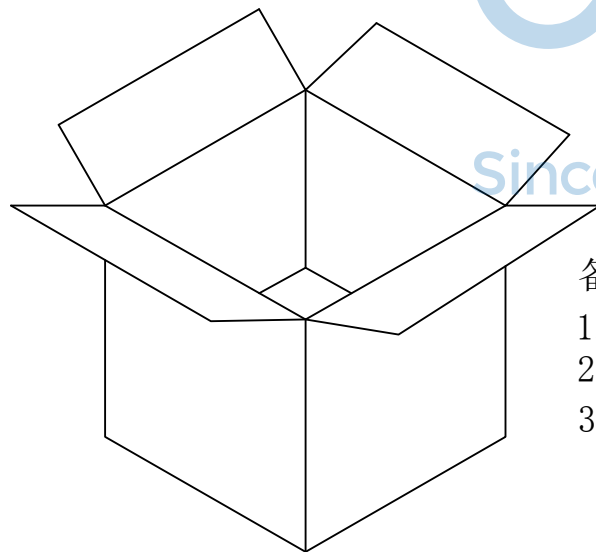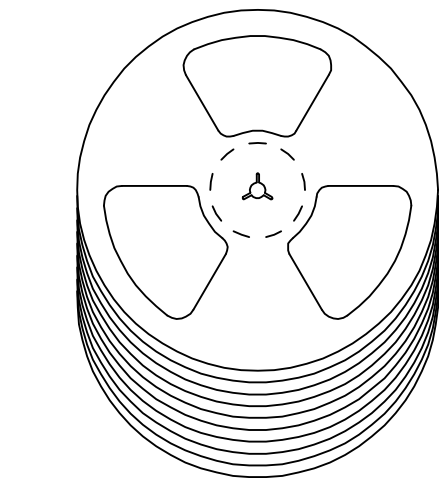

备注:

1. 包装数量: 200/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0386-2			深圳市步步精科技有限公司			
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: DC插座 DC550200-1386-20000H 2.0针 180度 H=15.0 三脚插 全铜 加盖编带	
	APPD.	JM_Zheng			PJ. NO.:116-309-030004-P1G	
	CHKD.	TSP			SIZE: A4 DRW NO.:	
			FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A		REV.: A0	UNIT: mm	PAGE: 3/3
		DR.	LYX			