
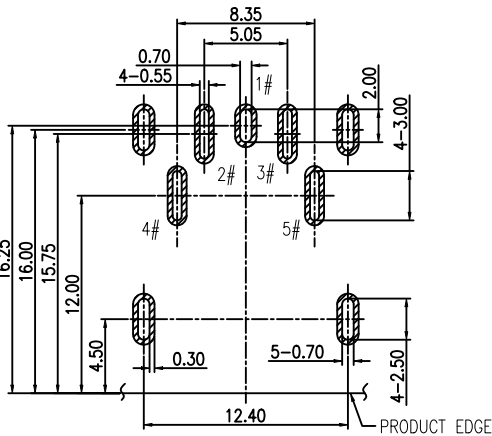

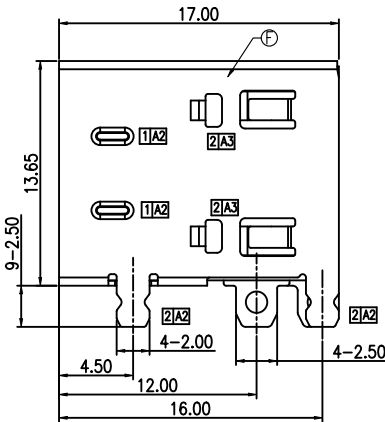
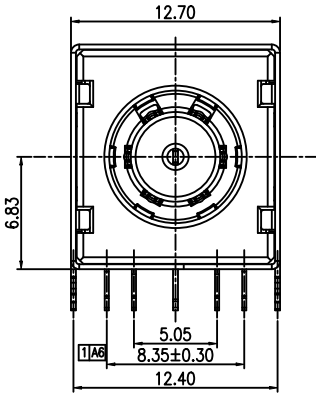





REV.	ECN	NO	CONTENT	DATE	ENGINEER
A0					

SPECIFICATION:

1. RATING: DC 30V 25A
2. CONTACT RESISTANCE:
CENTER PIN: 30mΩ MAX (INITIAL).
40mΩ MAX (FINAL).
DC_IN+/DC_IN-: 15mΩ MAX (INITIAL).
25mΩ MAX (FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 25N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES

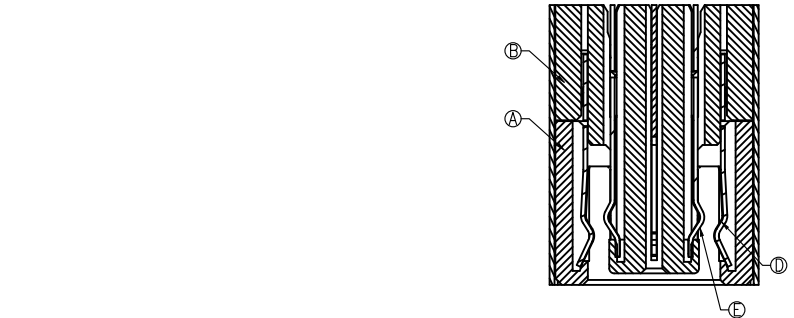

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

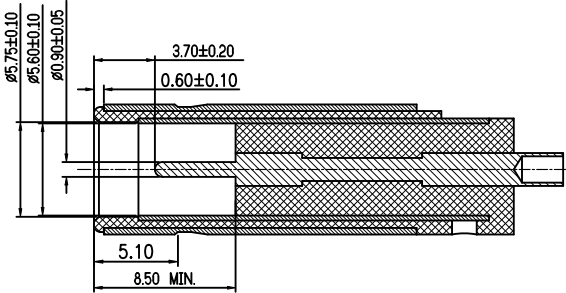



MATING PLUG
DP790090-0145-60000H

SCHEMATIC	
√	2#/3#(+)
>	1#(SIGNAL)
^	4#/5#(-)



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
F	SHELL	SUS 304	Ni 50u" MIN.	1
E	ANODE	C7025	Ni 40u" 11A4	1
D	NEGATIVE	C7025	Ni 40u" 11A4	1
C	CENTER PIN	C5210	Au1u"(CONTACT AREA)/Sn80u"/Ni 40u" 11A3	1
B	COVER	PA10T	BLACK	1
A	HOUSING	PA10T	BLACK	1

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG, NO: 0386-2		深圳市步步精科技有限公司		NAME: DC-790 1.0针 全铜 (DC790090-0289-20000H) (常规款)	
				PJ. NO.: DC. 02. 22-12-G001	
APPD.	JM_Zheng	SIZE: A4		DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	LHC	SCALE: N/A		REV.: A0	UNIT: mm
				PAGE: 1/1	

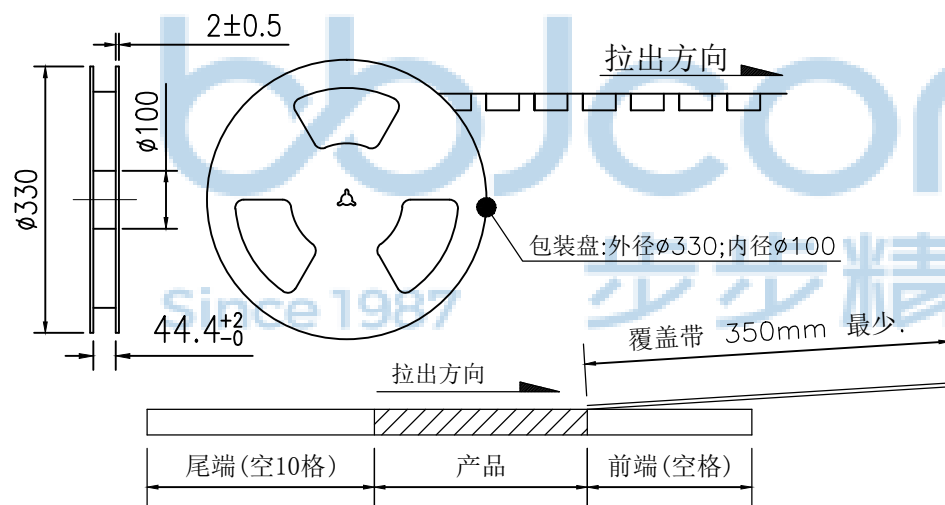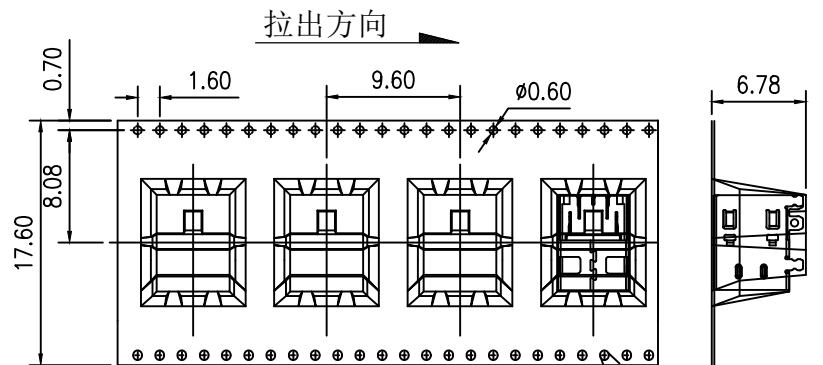

备注:

- 材料规格:
 - 载带: T=0.50mm, 黑色
 - 包装盘: 蓝色
 - 纸箱: L=335, W=335, H=380
- 包装数量:
 - 150PCS/卷, 7卷(1050PCS)/箱
- 上盖带拨离力: 0.1N~0.7N(10~70gf);
拨离角度: 165°~180°;
拨离速度: 300mm/分钟.

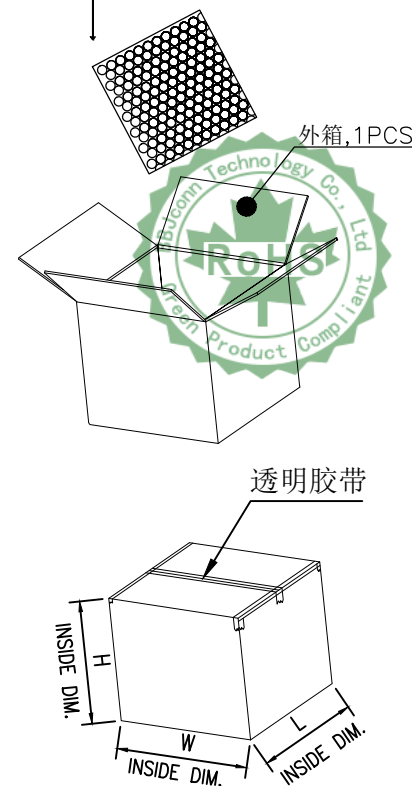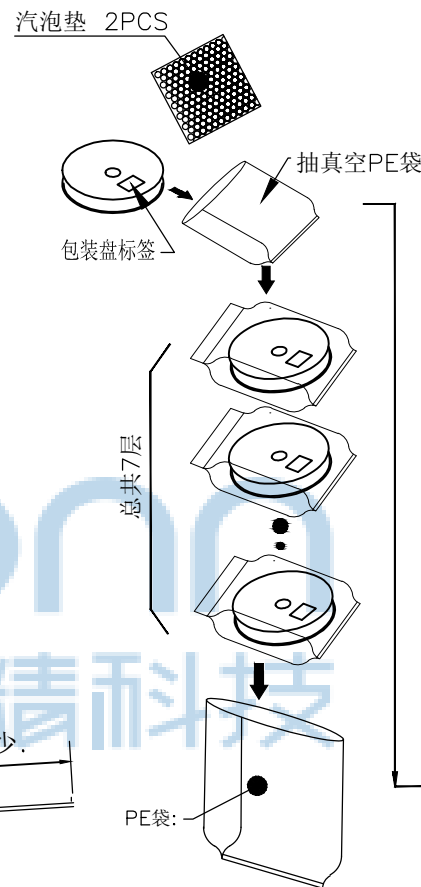

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3° .X*: ±2° .XX*: ±1°		NAME: DC-790 1.0针 全铜 (DC790090-0289-20000H) (常规款)			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: DC. 02. 22-12-G001			
DR. LHC		PDWG.NO: 0386-2		SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2			