

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

NOTES:

1. MATERIAL:

HOUSING: LCP, BK, UL 94V-0
SHELL: SPCC/BRASS C2680
TERMINAL: BRASS C2680

2. CONTACT PLATING:

50u" Min NICKEL UNDERPLATING OVER ALL
GOLD FLASH PLATING AT CONTACT AREA
80u" Min TIN AT SOLDERING AREA
SHELL PLATING: NICKEL 50u" Min

3. ELECTRICAL:



INSULATION RESISTANCE: 100MΩ MIN
CONTACT RESISTANCE: 30mΩ MAX
DIELECTRIC WITHSTAND: 500 VAC FOR 1Min
CURRENT RATING: 0.5A
VOLTAGE RATING: 40V

4. MECHANICAL:





INSERTION FORCE: 4.5 KGF MAX
WITHDRAWAL FORCE: 1.0~4.0 KGF

5. DURABILITY: 10000 CYCLES

6. TEMPERATURE RANGE: -55℃ to +105℃

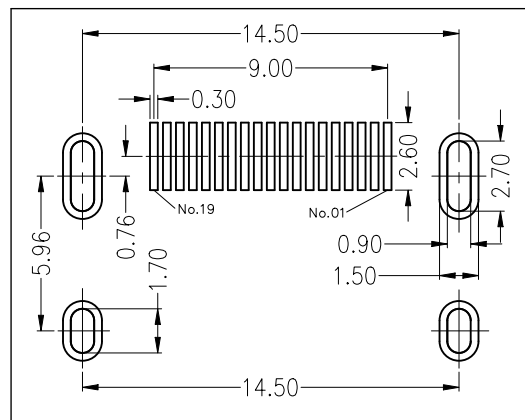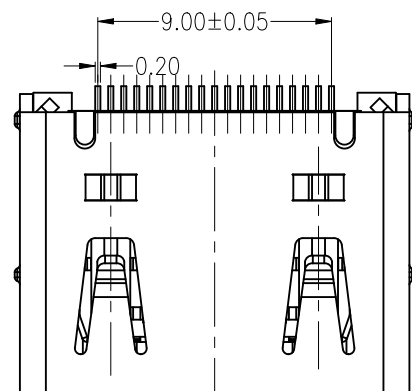

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW (TOLERANCE: +/-0.05)

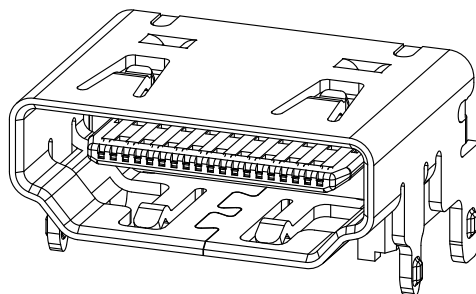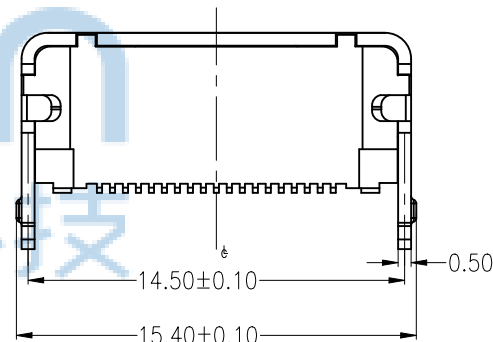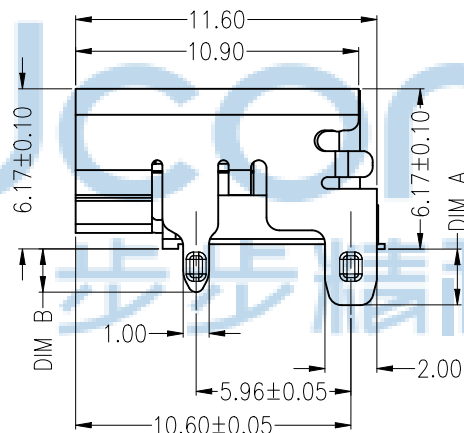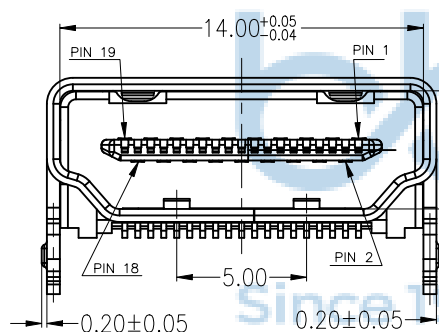

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0100-2



深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X': ±3"
.X': ±2"
.XX': ±1"

NAME: HDMI 19P 2.1版 A型 母座 L=11.60 板上四脚插 平口
铜壳镀镍 带凸点 端子SMT 端子镀金G-F

APPD. JM_Zheng

CHKD. LYX

DR. TSP

PJ. NO.: HD.01.51-24-1001

SIZE: A4 DRW NO.:


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

外壳脚规格:

规格	DIM A	DIM B	外壳脚凸点
1	2.16	1.66	无凸点
2	2.16	1.66	有凸点
3	1.50	1.50	无凸点
4	2.20	2.20	无凸点
5	1.50	1.50	有凸点

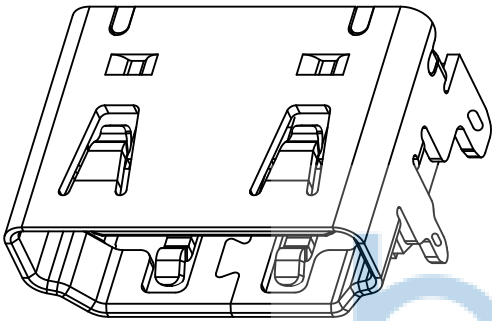


脚有凸点

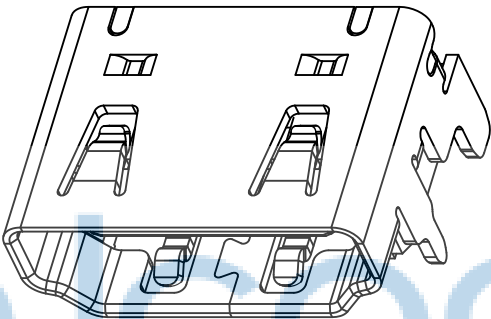


脚无凸点




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
APPD.	JM_Zheng	NAME: HDMI 19P 2.1版 A型 母座 L=11.60 板上四脚插 平口 铜壳镀镍 带凸点 端子SMT 端子镀金G-F	
CHKD.	LYX	PJ. NO.: HD.01.51-24-1001	
DR.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO: 0100-2		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3	

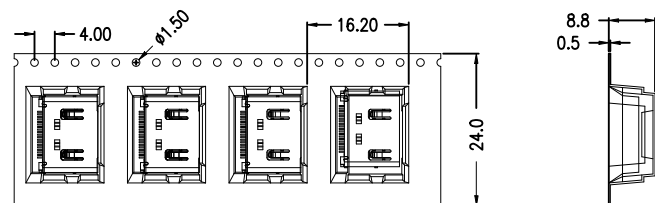

出料方向: 前

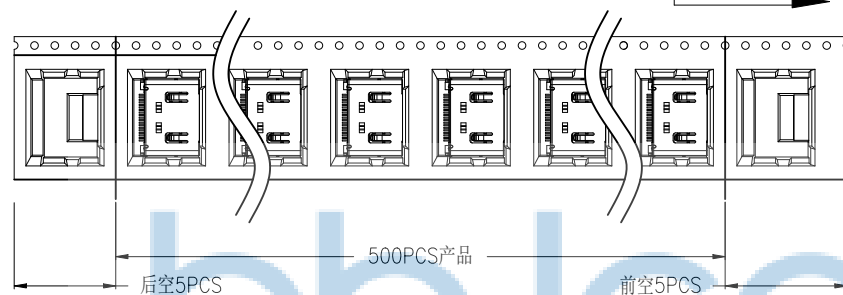

NO. 1

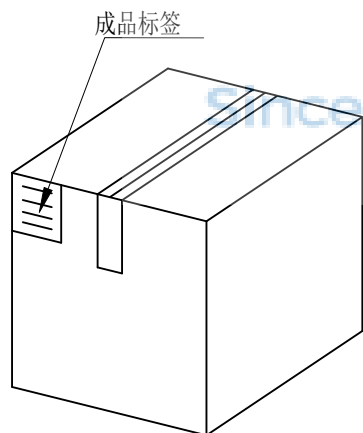

纸箱规格: 33*33*30.5cm


NO. 4

1. 包装要求:


- 1.1 每卷包装500pcs, 卷带前后各空出5pcs位置;
- 1.2 每10盘放一箱, 共计5kset;
- 1.3 纸箱外贴上标签

备注:

1. 若有未装满之零数, 必须用泡棉塞满。
2. 针对于包装方式可根据客户要求包装。

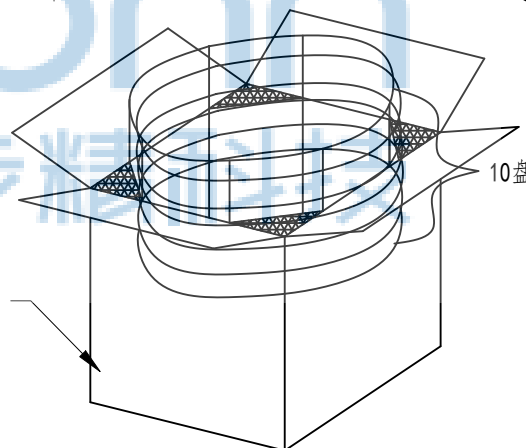

NO. 3

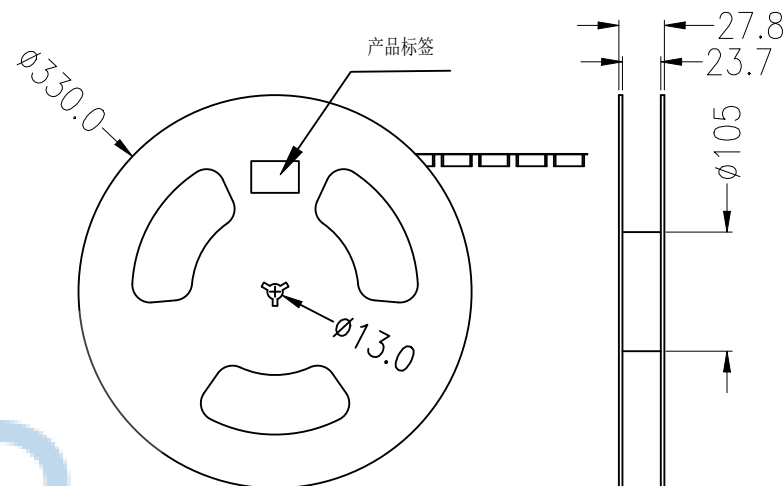

NO. 2



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0100-2			深圳市步步精科技有限公司					
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: HDMI 19P 2.1版 A型 母座 L=11.60 板上四脚插 平口 铜壳镀镍 带凸点 端子SMT 端子镀金G-F			
	APPD.	JM_Zheng			PJ. NO.: HD.01.51-24-1001			
	CHKD.	LYX			SIZE: A4 DRW NO.:			
	DR.		TSP	FINISH: SEE NOTES		MAT'L.: SEE NOTES		
	SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 3/	