
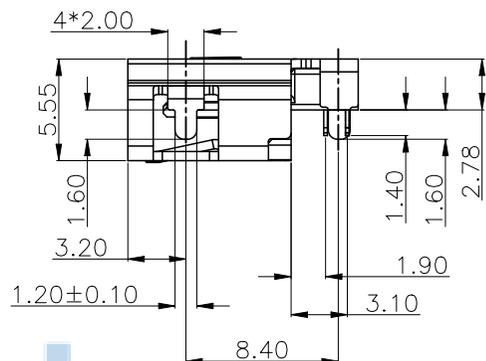




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	LYL

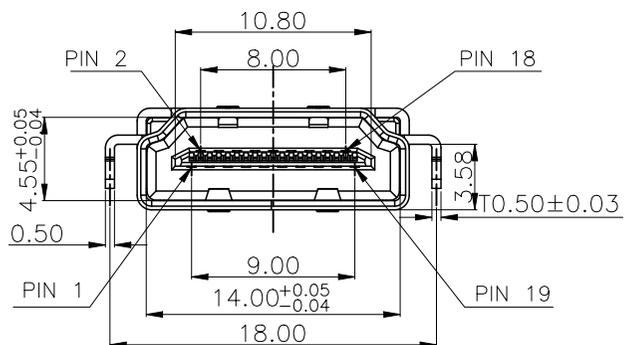

NOTES:



- ELECTRONIC:
CONTACT RESISTANCE: 20mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE: AC 500V,1min.
- MECHANICAL:
DURABILITY: 10000 CYCLE.
- ENVIRONMENT CHARACTERISTICS:
OPERATING TEMPERATURE: -55°C TO +105°C
- RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM
- MATERIAL LIST:

3	SHELL	1	SUS 201 T=0.50	NI PLATED
2	CONTACT	19	COPPER ALLOY T=0.20	AU/TIN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK

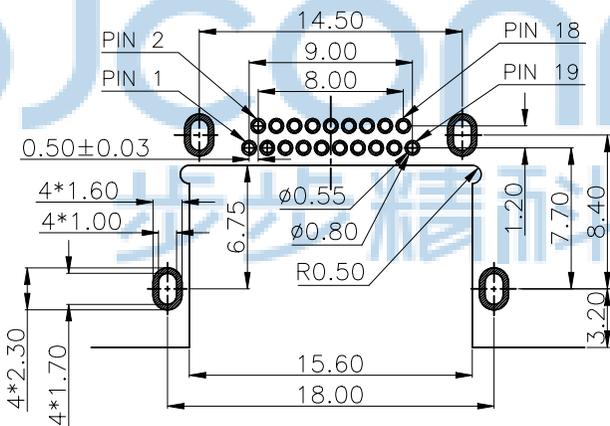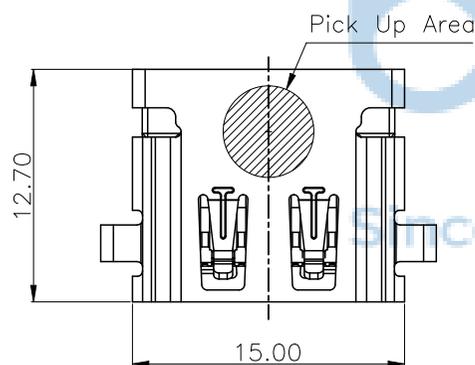


RECOMMENDED PCB LAYOUT T=1.60

GENERAL TOLERANCES:±0.05

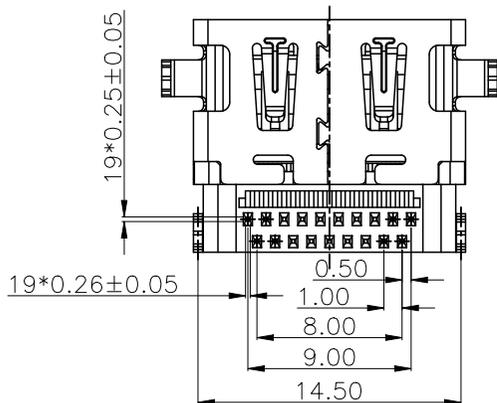

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X": ±2" .XXX: ±0.13 .XX': ±1"	
APPD.	JM_Zheng	NAME: HDMI 19P 母座 L=12.70 反向沉板3.58 四脚插 端子DIP 平口 LCP黑 不锈钢外壳	
CHKD.	LYX	P.J. NO.: HD.01.31-34-K002	
DR.	LYL	SIZE: A4 DRW NO.:	
PDWG.No: 0409-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

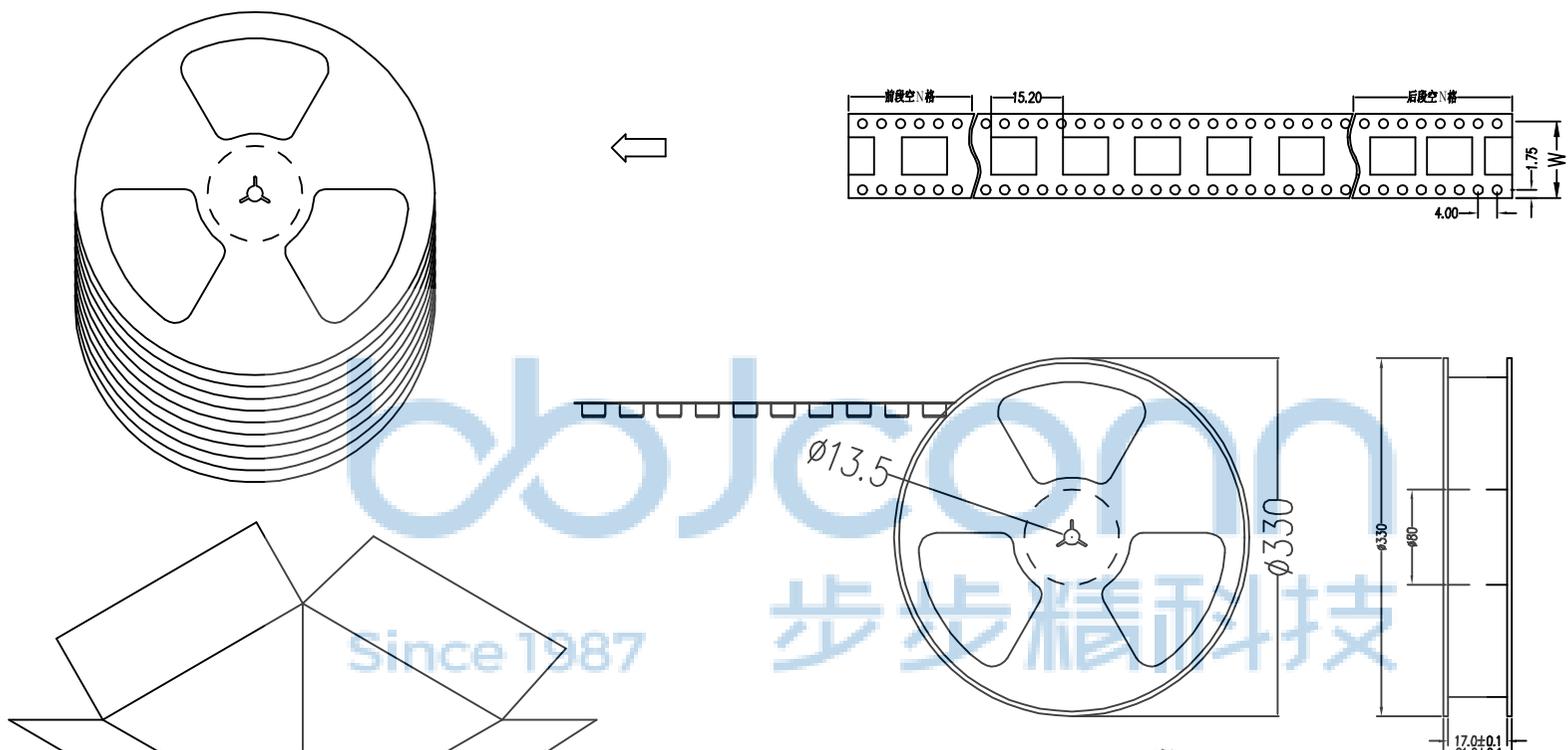

500/PCS卷

备注:

1. 包装数量: 500/PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM
纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" XX': ±1"	
APPD.	JM_Zheng	NAME: HDMI 19P 母座 L=12.70 反向沉板3.58 四脚插 端子DIP 平口 LCP黑 不锈钢外壳	
CHKD.	LYX	P.J. NO.: HD.01.31-34-K002	
PDWG.NO:	0409-1	SIZE: A4 DRW NO.:	
DR.	LYL	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	