

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

NOTES:

1. ELECTRONIC:


CONTACT RESISTANCE: 30mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE: AC 500V, 1min.

2. MECHANICAL:

DURABILITY: 10000 CYCLE.

3. ENVIRONMENT CHARACTERISTICS:

OPERATING TEMPERATURE: -55° C TO +105° C




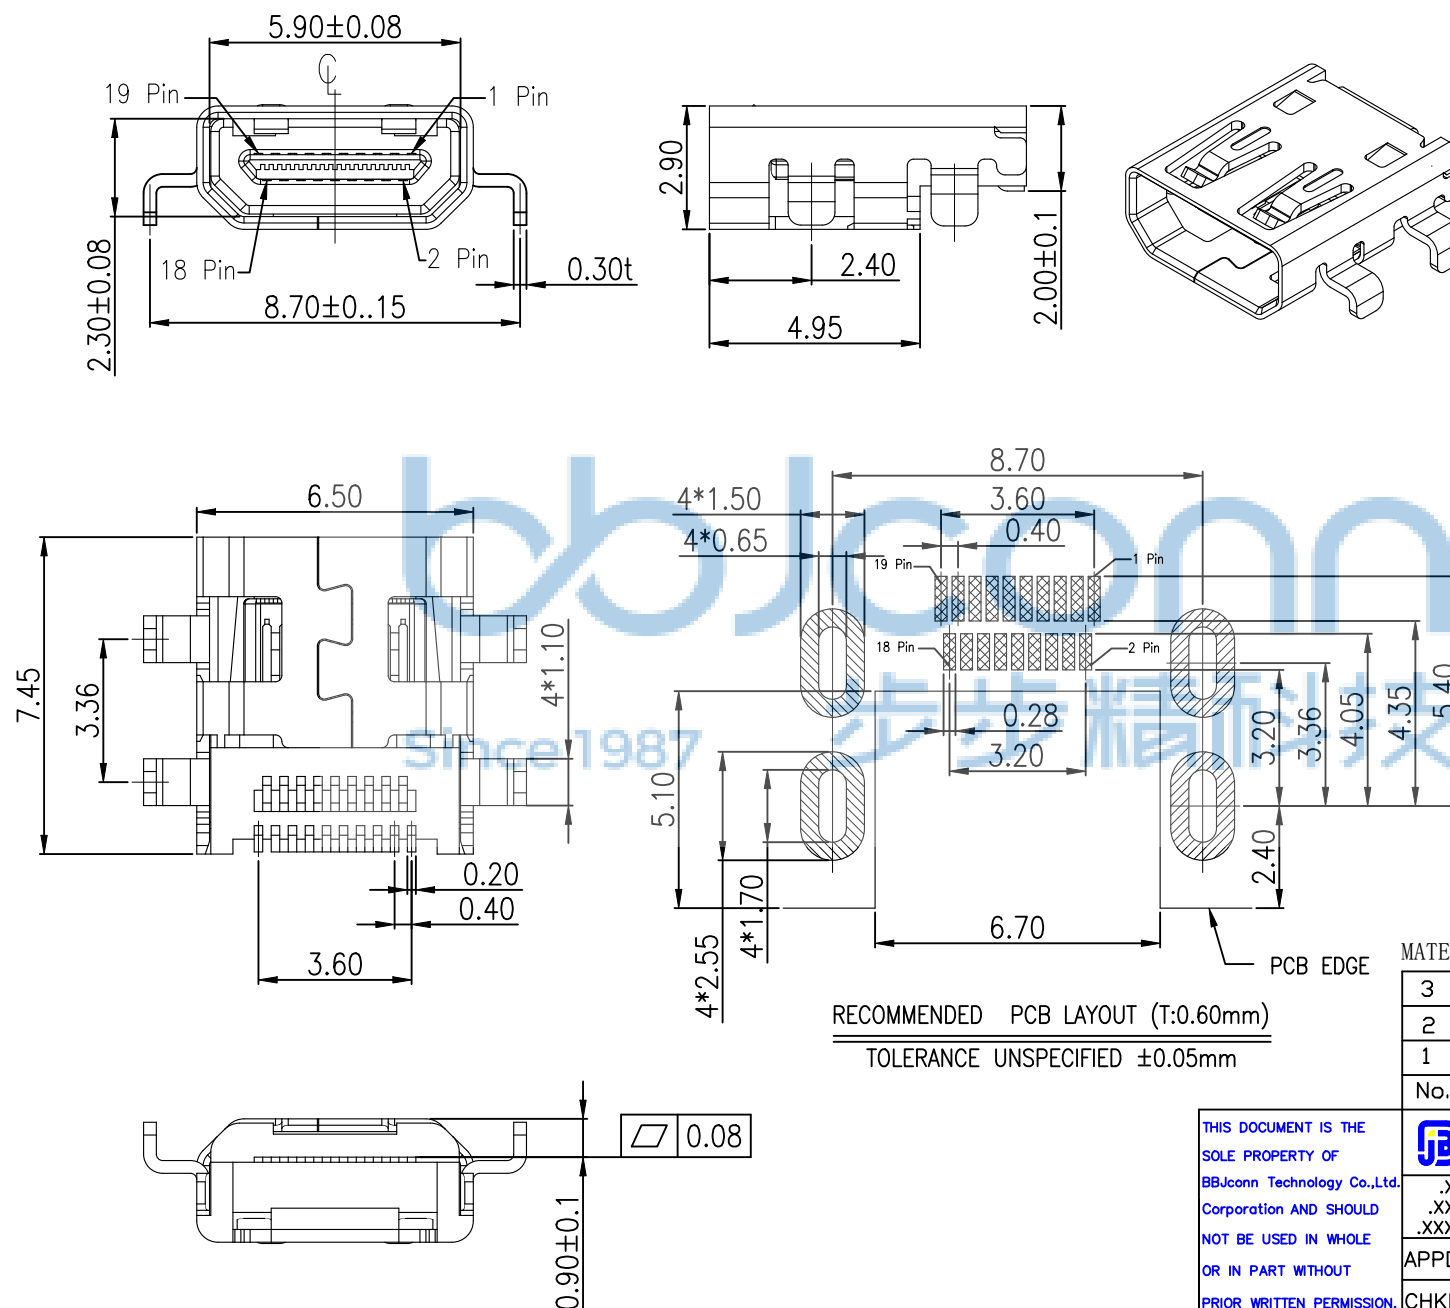


MATERIAL LIST:

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	COPPER ALLOY	NI PLATED
2	CONTACT	19	COPPER ALLOY	AU/TIN PLATED
1	HOUSING	1	LCP BLACK	<UL 94V-0>

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG NO: 0409-1

深圳市步步精科技有限公司		NAME: HDMI D型 19P 母座 四脚插 端子SMT L=7.45 沉板0.90 平口 LCP黑胶 铜壳	
.X: ± 0.38	X*: $\pm 3^*$	PJ. NO.: HD.03.31-24-K001	
.XX: ± 0.25	X*: $\pm 2^*$	SIZE: A4 DRW NO.:	
.XXX: ± 0.13	.XX*: $\pm 1^*$	FINISH: SEE NOTES MAT'L.: SEE NOTES	
APPD. JM_Zheng	CHKD. LYX	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2
DR. TSP			

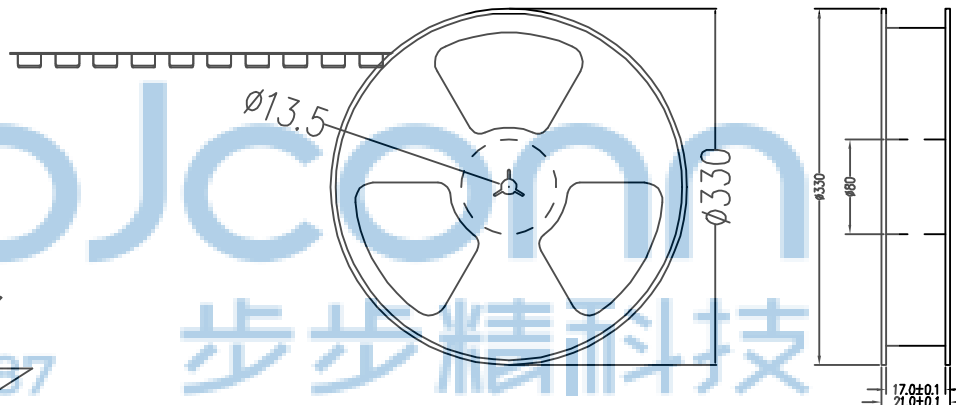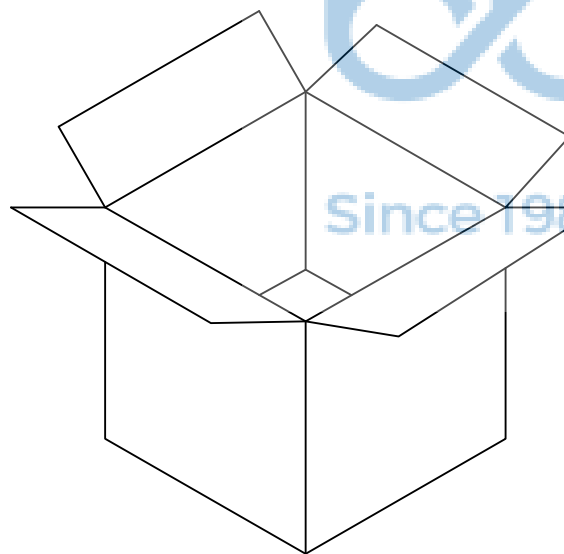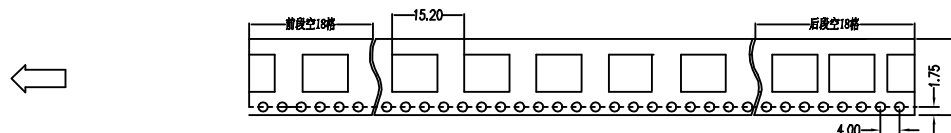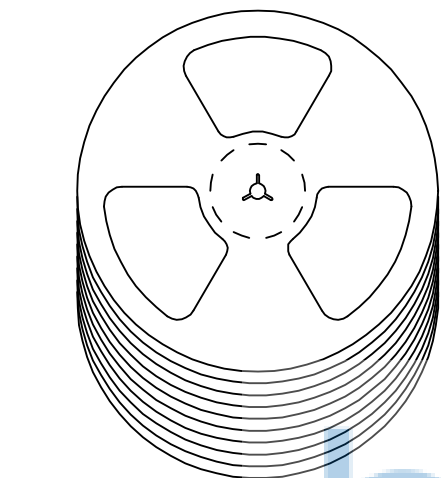

备注:

1. 包装数量: 2200/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: HDMI D型 19P 母座 四脚插 端子SMT L=7.45 沉板0.90 平口 LCP黑胶 铜壳	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	APPD.	JM_Zheng	PJ. NO.: HD.03.31-24-K001	
PDWG.NO: 0409-1	DR.	CHKD.	LYX	SIZE: A4	DRW NO.:
				FINISH: SEE NOTES	MAT'L.: SEE NOTES
				SCALE: N/A	REV.: A0
				UNIT: mm	PAGE: 2/2