
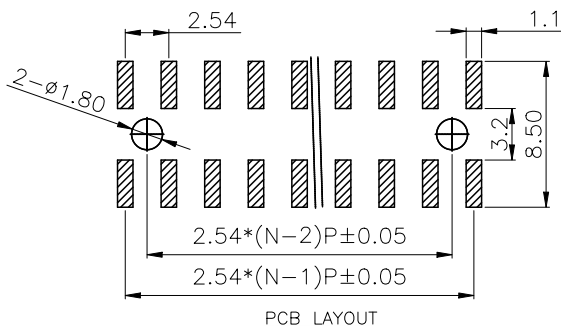
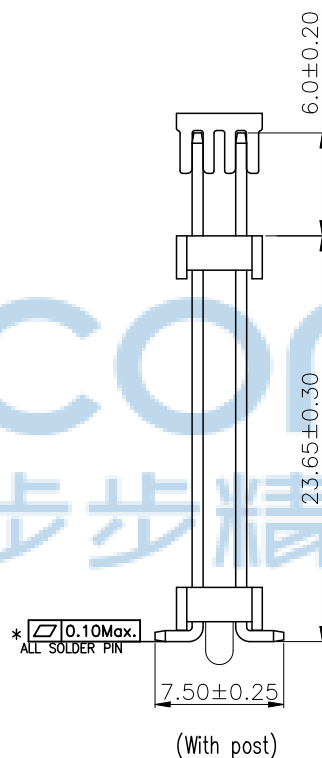
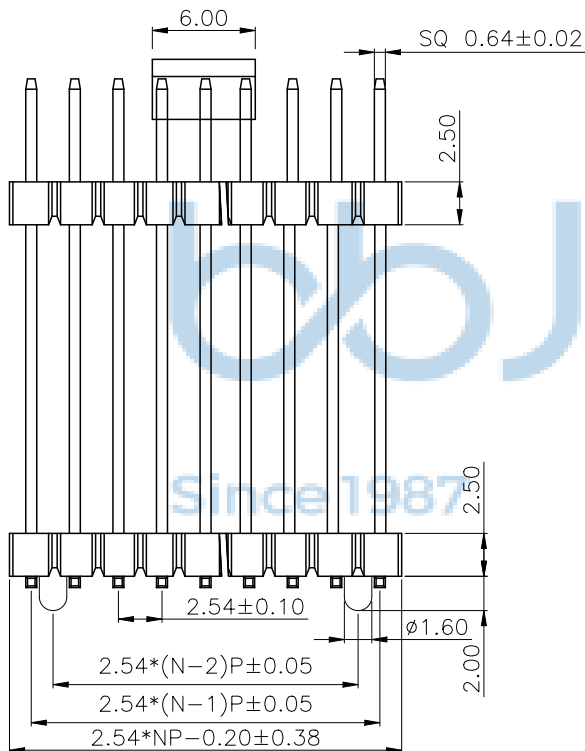


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

Notes:
Rated current:3.0A
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operating Temperature:-40℃ TO +105℃
Contact Material:Brass
Insulator Material: PA6T UL94V-0 BK

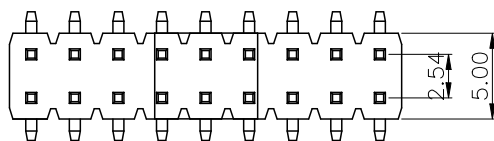

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X'': ±2' XX': ±1'	
APPD	JM_Zheng	NAME: 排针 2.54PH 塑高2.5 双塑 2x10P PA6.0 PB23.65 PC7.5 SMT 带柱	
CHKD	LYX	PJ NO: 121-1A4-200001-J8G SIZE:A4 DRW NO:	
PDWG NO: 0919-1		FINISH:SEE NOTES MAT'L:SEE NOTES SCALE:N/A REV:A0 UNIT:mm PAGE:1/1	
DR	SGF		