
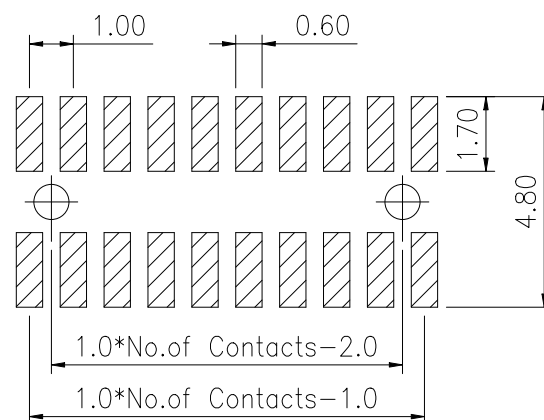
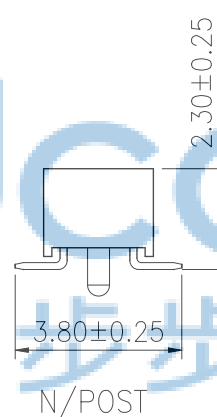
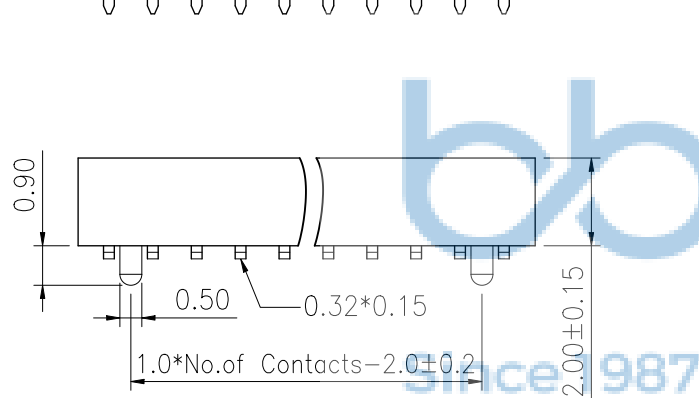


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

SPECIFICATIONS

Current Rating: 1 AMP
 Insulator Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Withstanding Voltage: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° - 260° for 30-60 seconds
 Insulator: Glass filled PA6T (UL94V-0), Black
 Contacts: Brass

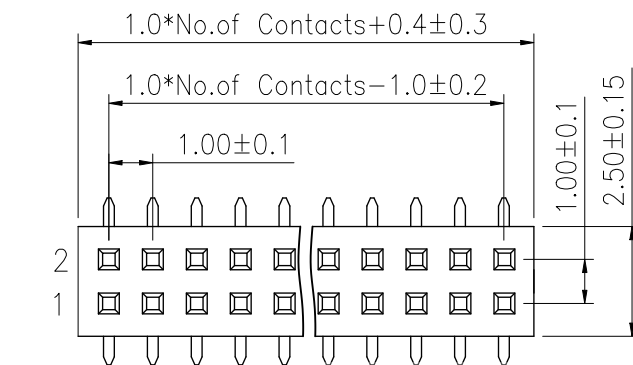

PCB LAYOUT



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
APPD. JM_Zheng		NAME: 排母 1.0FH H2.0 2x12P SMT 带柱 W3.8 PB2.30 PA6T 加盖编带 (AFH10020-212MCM11UR01)	
CHKD. LYX		 PJ. NO.: FH.02.22-13-7001 SIZE: A4 DRW NO.:	
DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1	