

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

Notes:

Rated current:3.0A

Withstand Voltage:500V AC/DC

Contact Resistance:20mΩ Max





Insulation Resistance:1000MΩ Min

Operating Temperature:-40℃ TO +105℃

Contact Material:Brass

Plated: Gold flash

Insulator Material: PA6T UL94V-0 BK

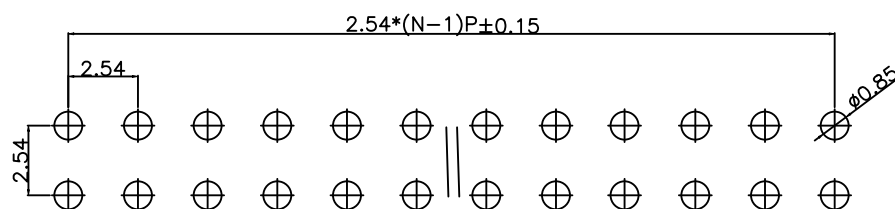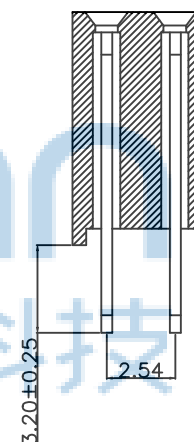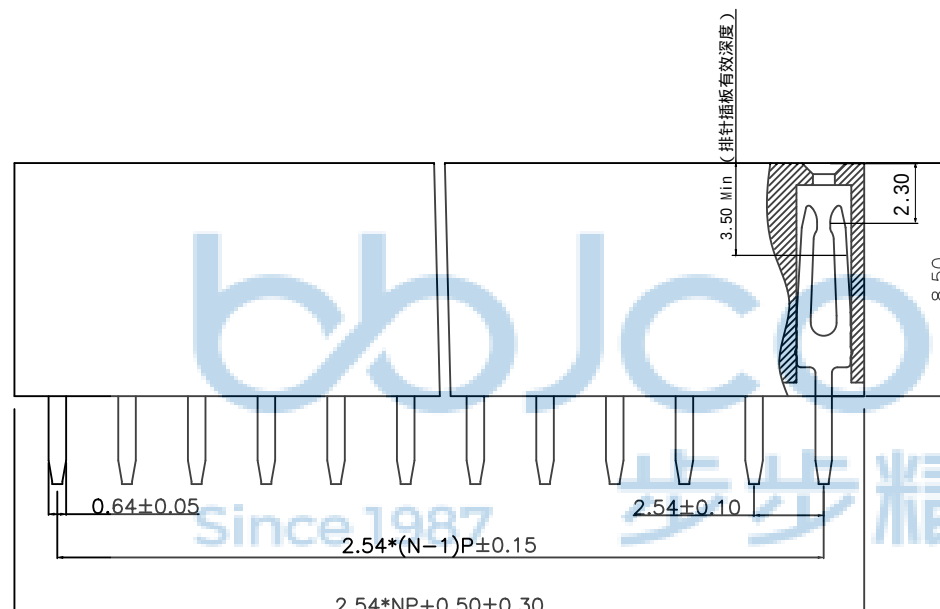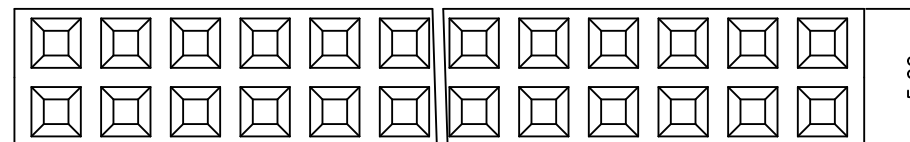

PCB LAYOUT

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0919-1		 深圳市步步精科技有限公司	NAME: 排母 PH2.54 塑高8.50 2X9P PC3.2 Y型 180度 DIP 盒装
APPD.	JM_Zheng		PJ. NO.: 122-2A4-180001-J8G
CHKD.	LYX		SIZE: A4 DRW NO.:
DR.	GZY		FINISH: SEE NOTES MAT'L.: SEE NOTES
			SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1