





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES:

- HOUSING: LCP (UL94V-0), BLACK.
- TERMINAL: COPPER ALLOY C2680
GOLD PLATED ON CONTACT AREA 1u,
TIN PLATED ON SOLDER TAILS.
NICKEL PLATED OVERALL.
- SHELL: COPPER STEEL, T=0.30mm,
NICKEL PLATED OVERALL.

SPECIFICATION

- CURRENT RATING: 0.5A MAX .
- DIELECTRIC WITHSTANDING VOLTAGE:
500V AC R. M. S. FOR ONE MINUTE.
- INSULATION RESISTANCE: 100MΩ MIN. AT 500V DC.
- CONTACT RESISTANCE: 30mΩ MAX.
- OPERATING TEMPERATURE: -25° C TO +85° C.
- DURABILITY: 10000 CYCLES.
- MATING FORCE: 4.5kgf MAX.
- UNMATING FORCE: 1.0kgf MIN.

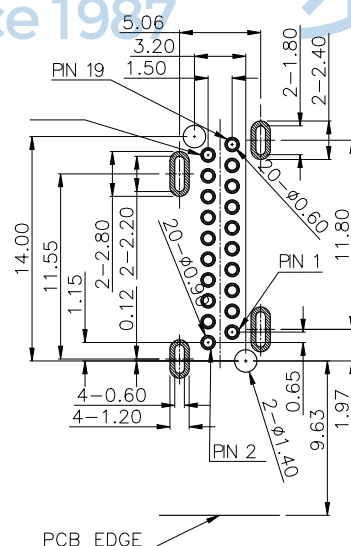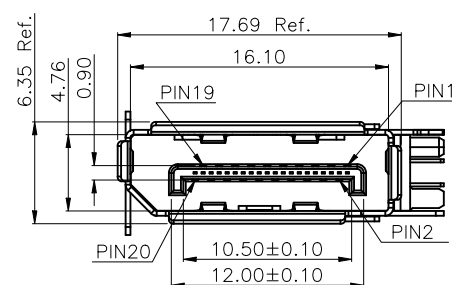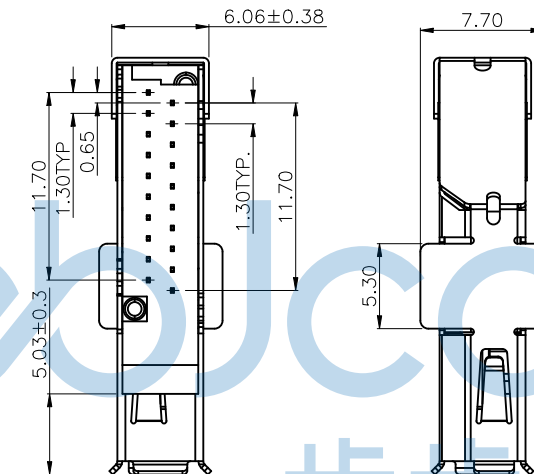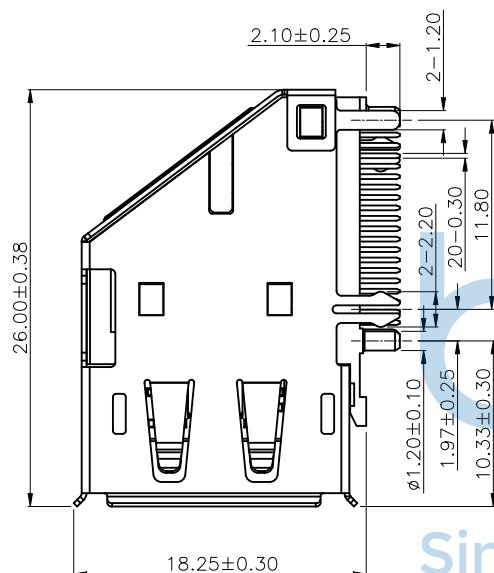

PCB EDGE

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05
TOP VIEW



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: DP 20P 母座 90度 L=26.00 侧插 两直脚 两鱼叉脚 带柱 端子DIP 卷边 LCP黑胶 铜壳	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'		APPD. JM_Zheng	
PDWG.NO: 0215-2		CHKD. LYX		DR. TSP	
				PJ. NO.: 158-222-200001-T2G	
				SIZE: A4 DRW NO.:	
				FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

TAPE & PACKAGE :

MATERIAL :



1. CARRIER TAPE : PS
2. COVER TAPE: PET
3. REEL : PS

QUANTITY:

1. 170 PCS/REEL.
2. 6 REEL/CARTON: 1020PCS.




DIMENSION :

REEL SIZE :
DIA=380.0mm, W=56.0mm
CARTON :
L=400mm, W=400mm, H=400mm

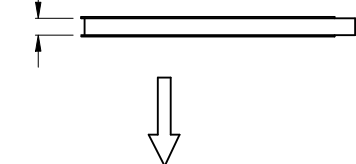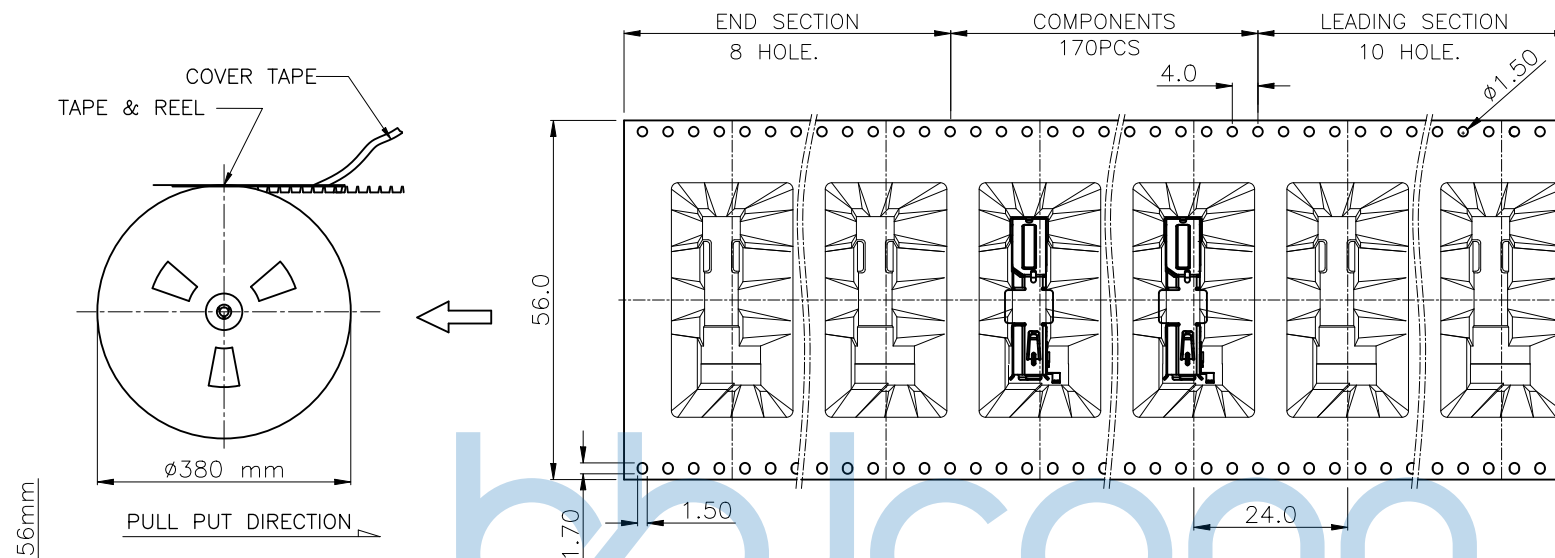


PULL PUT DIRECTION

6 REEL/PE BAG



CARTON

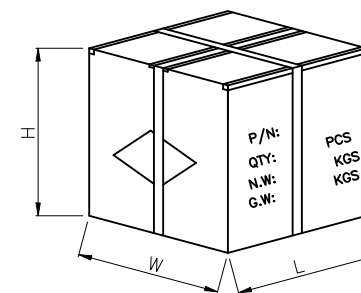

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: DP 20P 母座 90度 L=26.00 侧插 两直脚 两鱼叉脚 带柱 端子DIP 卷边 LCP黑胶 铜壳	
P/WG,NO: 0215-2	APPD. JM_Zheng	CHKD. LYX	DR. TSP	PJ. NO.: 158-222-200001-T2G	SIZE: A4 DRW NO.:
				FINISH: SEE NOTES	MAT'L.: SEE NOTES
				SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2