




REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

SPECIFICATIONS:

- MECHANICAL :
 - INSERTION FORCE :44.1 N MAX
 - WITHDRAWAL FORCE :9.8 N MIN.
AFTER 5,000 CYCLES MATING: 0.5kgf MIN.
- ELECTRICAL :
 - CONTACT CURRENT RATING: 0.5A MIN.
 - VOLTAGE RATING :40V AC (rms)
 - WITHSTANDING VOLTAGE: 500 VAC FOR 1 MINUTE.
 - INSULATION RESISTANCE: 100 MEGAOHMS MIN
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- ENVIRONMENTAL :
 - OPERATING TEMPERATURE:-25°C TO +85°C

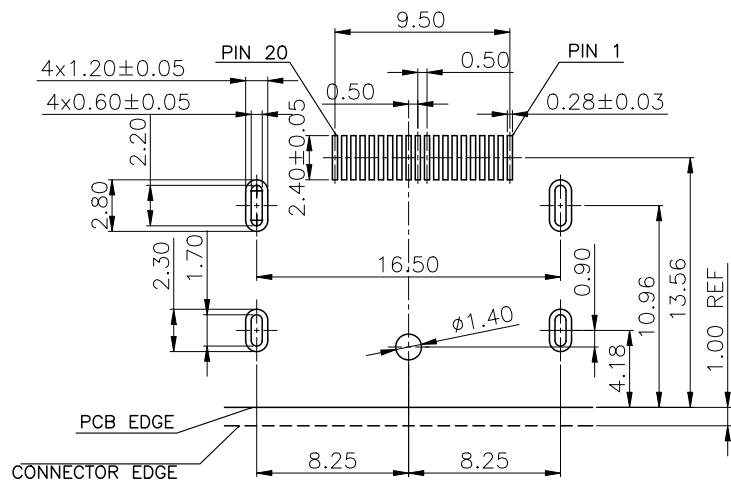

RECOMMENDED PCB LAYOUT
(THICKNESS=1.6±0.15mm)



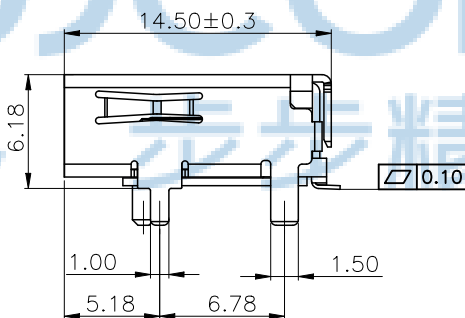
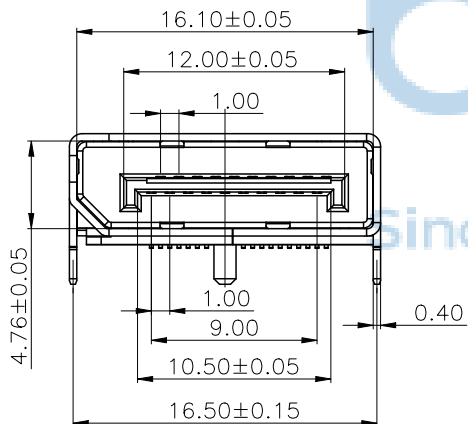


4	COVER	1	LCP BLACK UL94V-0
3	CONTACT	20	COPPER ALLOY, GOLD FLASH PLATED ON CONTACT AREA TIN PLATING ON SOLDER AREA, NI PLATING UNDER OVER ALL
2	HOUSING	1	LCP BLACK UL94V-0
1	SHELL	1	COPPER ALLOY, NI PLATING OVER ALL.
ITEM	PART	QTY'S	SPECIFICATION

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3° .X*: ±2° .XX*: ±1°	NAME: DP 20P 母座 90度 四脚插 L=14.5 SMT 平 口 铜壳 LCP黑胶 带柱 端子镀金GF 编带
APPD	JM_Zheng	PJ NO: 158-221-200005-J8G
CHKD	LYX	SIZE:A4 DRW NO:
PDWG NO: 0873-1	DR	SGF
		FINISH:SEE NOTES MAT'L:SEE NOTES
		SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

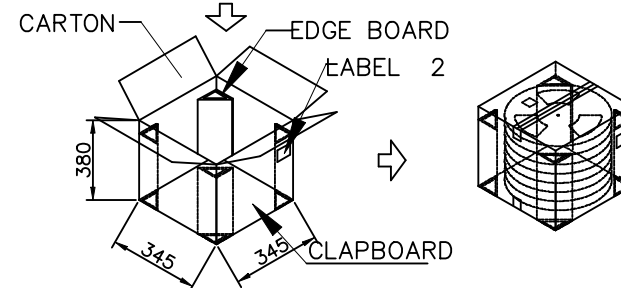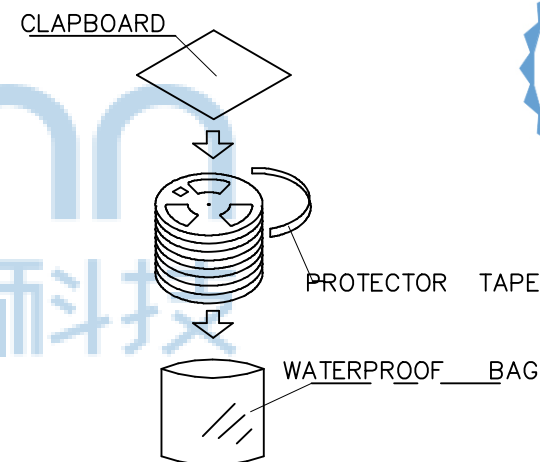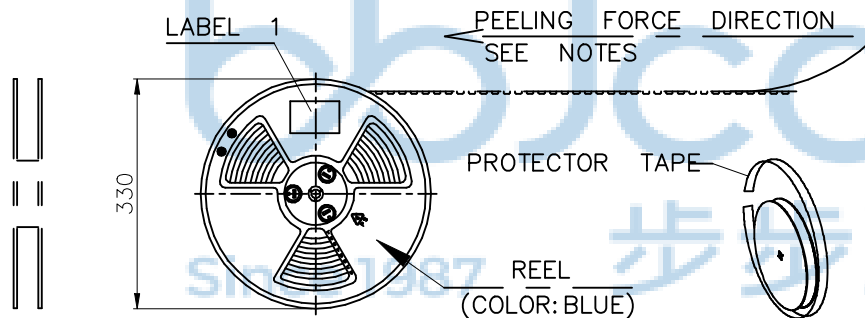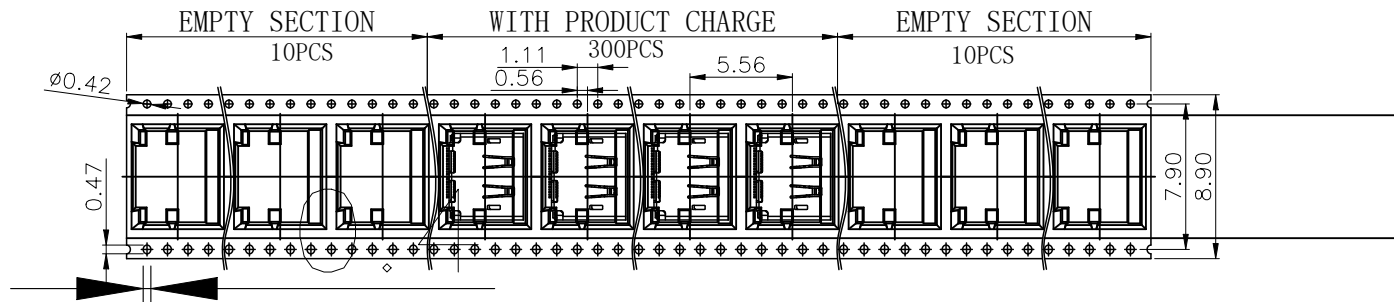

NOTES:

1. DIMNSION:

CARTON: 345*345*380mm,K=K. (1PCS)

2. QUANTITY:

300 PCS/REEL

10 REELS/SHIPPING CARTON

3000 PCS/SHIPPING CARTON



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0873-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 X": ±2"
.XXX: ±0.13 .XX': ±1"

APPD JM_Zheng

CHKD LYX

DR SGF

NAME: DP 20P 母座 90度 四脚插 L=14.5 SMT 平
口 铜壳 LCP黑胶 带柱 端子镀金GF 编带

PJ NO: 158-221-200005-J8G

SIZE:A4 DRW NO:

FINISH:SEE NOTES

SCALE:N/A

MAT'L:SEE NOTES

UNIT:mm

PAGE:2/2