
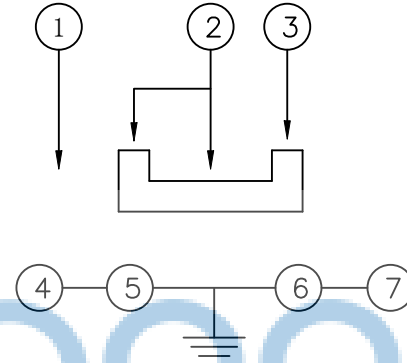






REV.	ECN NO	CONTENT	DATE	ENGINEER
	A0			

项 目	规 格
额定电负荷:	DC12V 50mA
绝缘电阻:	$\geq 100M\Omega$
耐压强度:	AC250V 50Hz/1min
电气寿命:	10000 cycles Min
环境温度:	$-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
相对湿度:	$(40^{\circ}\text{C} \leq 95\%$
接触电阻:	$\leq 100m\Omega$
动作力:	200gf $\pm$ 80gf

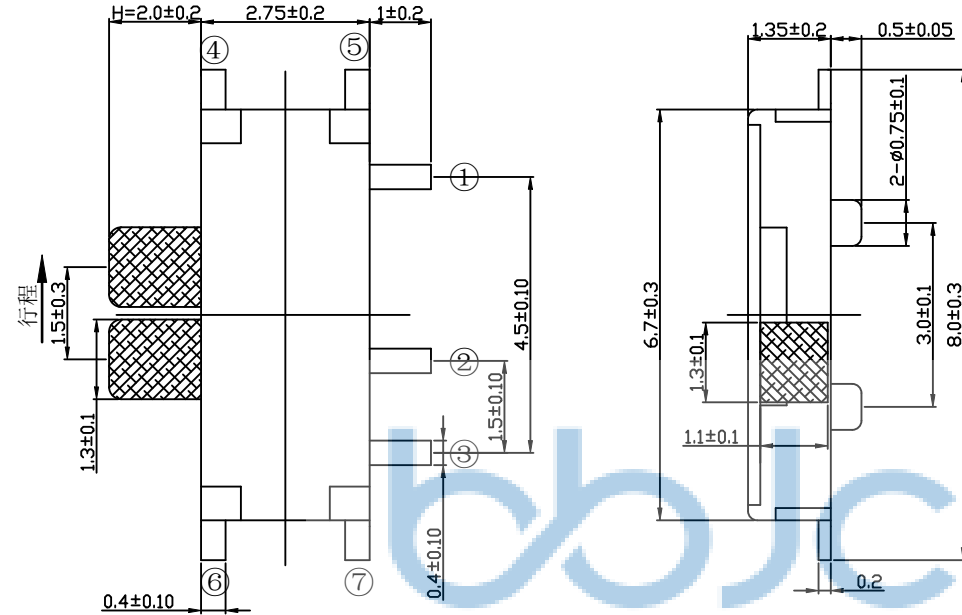

E	弹 条	1	不 锈 钢	银 白 色
D	接 触 簧 片	1	复 银 镀 青 铜	银 白 色 镶 银
C	盖 子	1	黄 铜	银 白 色
B	底 座	1	PPA与黄铜	黑 色 与 镀 银
A	按 柄	1	PA 46	□ 黄 色 □ 蓝 色 □ 黑 色 □ 白 色
序号	名 称	数 量	材 料	镀 涂 颜 色

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0106-1		深圳市步步精科技有限公司 APPD. JM_Zheng CHKD. LYX DR. TSP		NAME: 拨动开关 SK-11-G2.0 侧拨 七脚贴片 带柱 SMT 200gf PJ. NO.: 907-010-020005-Y8G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
---	--	--	--	---	--

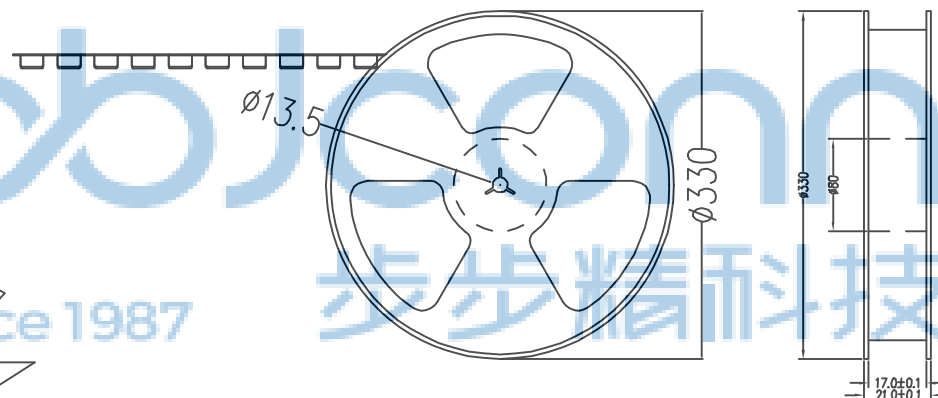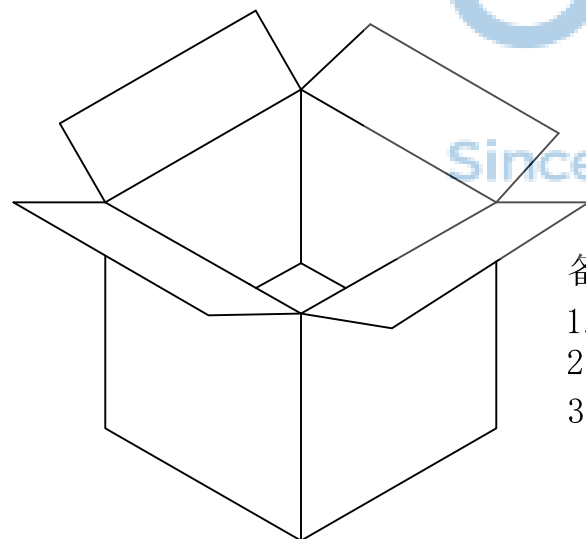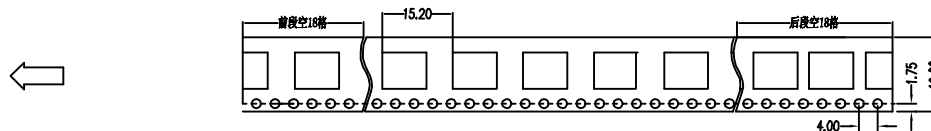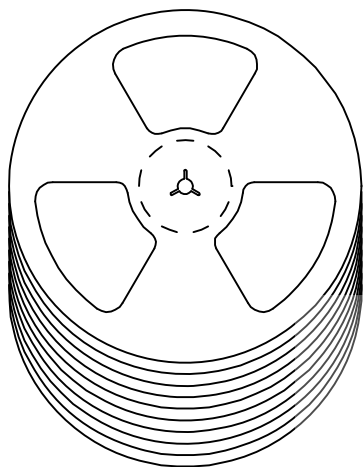

备注:

1. 包装数量: 3000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: 拨动开关 SK-11-G2.0 侧拨 七脚贴片 带柱 SMT 200gf	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		APPD. JM_Zheng CHKD. TSP	
PDWG.NO: 0106-1		DR. LYX		PJ. NO.: 907-010-020005-Y8G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 2/2	