




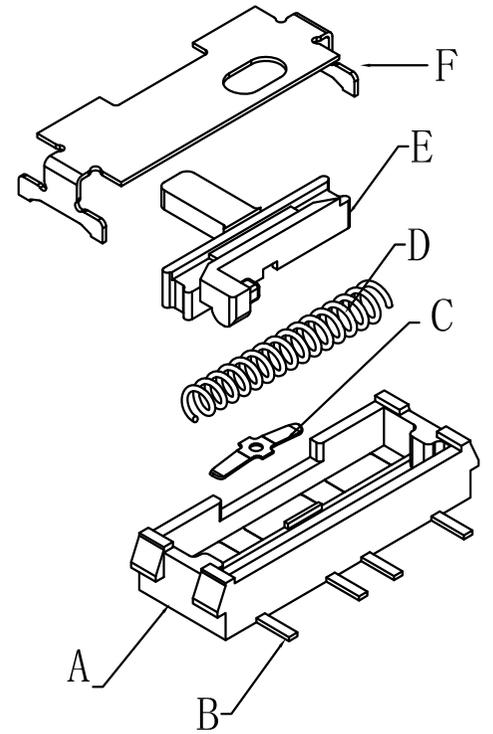

| REV. | ECN NO | CONTENT         | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0   |        | Initial release | /    | SGF      |

| 项 目  | 标 准  |
|------|--|
| 电气性能 | 额定电流 Rated Current: 50mA MAX                 |
|      | 额定电压 Rated voltage: DC 12V                   |
|      | 接触电阻 Contact resistance: ≤100mΩ              |
|      | 绝缘电阻 Insulation Resistance: ≥100MΩ           |
|      | 耐压强度 Compressive strength: AC100V 50Hz/1 min |
| 机械性能 | 操作力度 Operating force: 250±50gf               |
|      | 机械寿命 Mechanical life: 10,000 cycles Min      |
|      | 操作行程 Operation Stroke: 2.5±0.2mm             |
| 环境性能 | 温度范围 Temperature Range: -30°C ~ +85°C        |

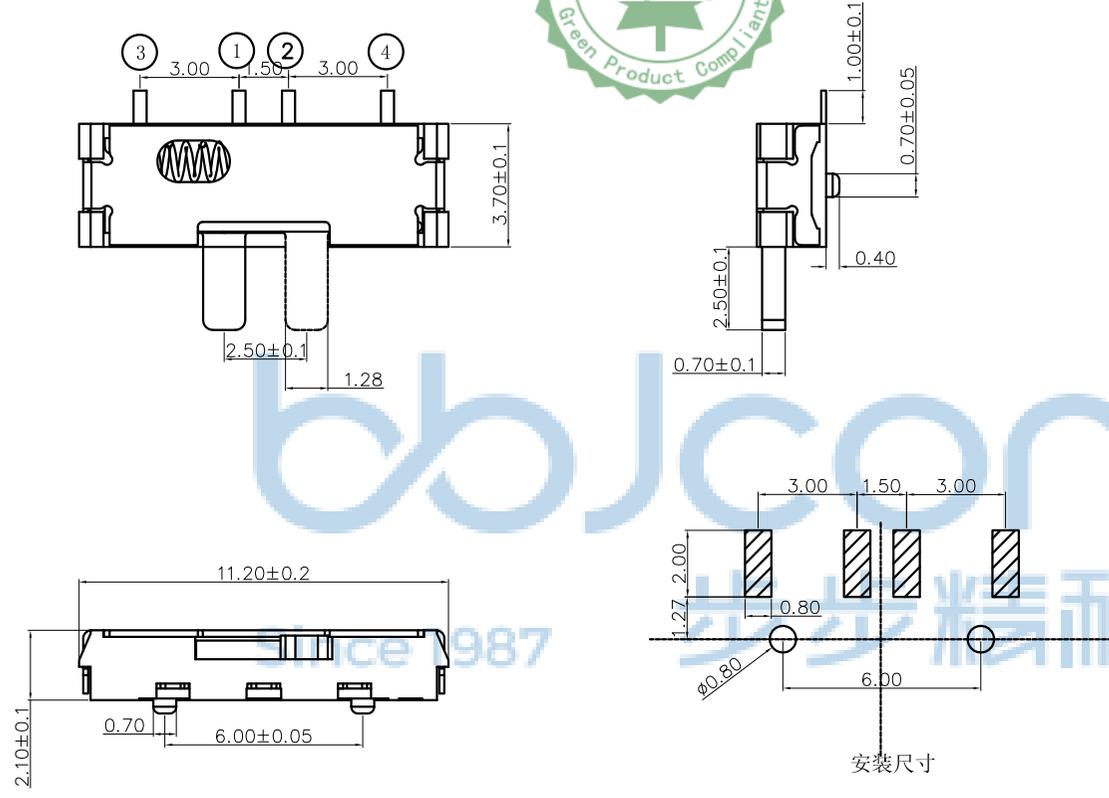

| NO. | 零件名称 Part Name | QTY | 材料 Material | 镀涂 Plating coating | 颜色 colour | 备注 Remarks |
|-----|----------------|-----|-------------|--------------------|-----------|------------|
| F   | 盖板             | 1   | SUS304      | 整体清洗               | 银灰色       |            |
| E   | 手柄             | 1   | 高温尼龙        | /                  | 黑色        |            |
| D   | 弹簧             | 1   | SUS304      | 整体清洗               | 银白色       |            |
| C   | 簧片             | 1   | 镀青铜         | 整体镀银               | 银白色       |            |
| B   | 嵌件             | 1   | C5191       | 整体镀银               | 银白色       |            |
| A   | 底座/基座          | 1   | PA46        | /                  | 黑色        |            |

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0124-1 DR. SGF

APPD. JM\_Zheng

CHKD. LYX

深圳市步步精科技有限公司






NAME: 拨动开关 SK-06A 侧拨 四脚贴片 带柱 端子SMT 260gf 编带

PJ. NO.: 907-010-030001-J8G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

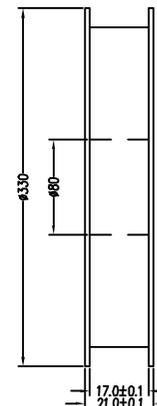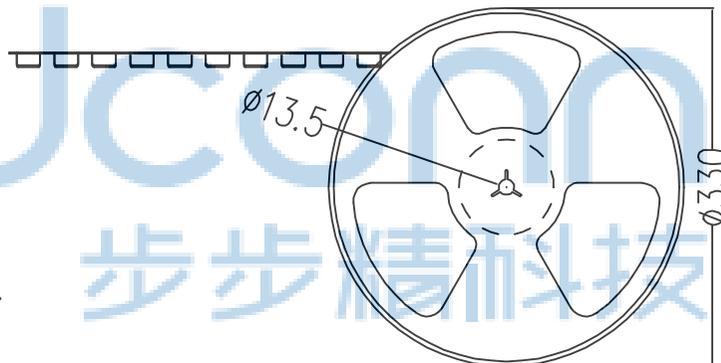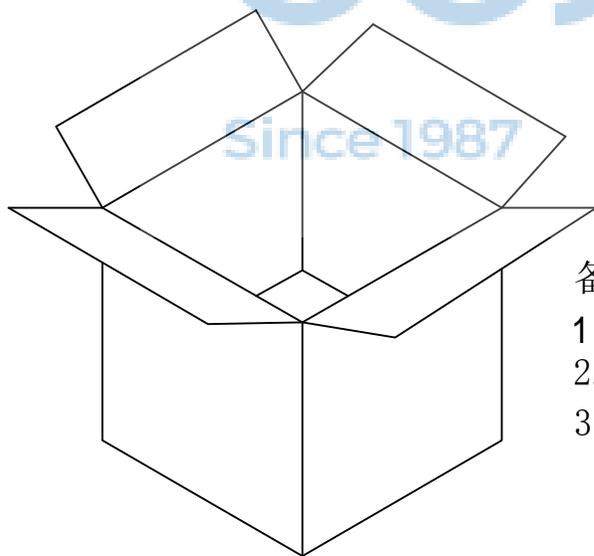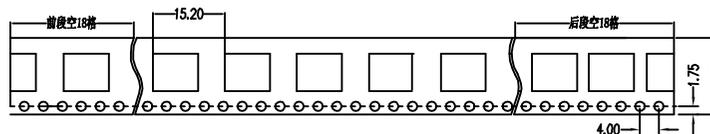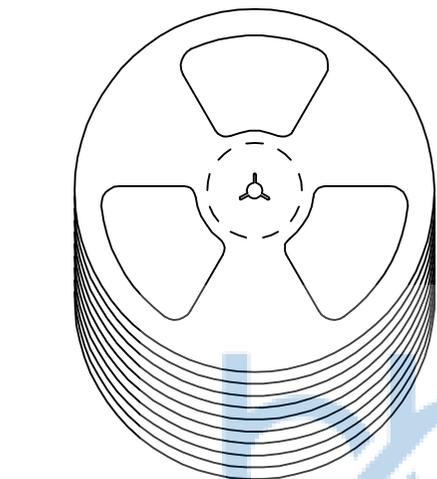

备注:

1. 包装数量：2000/PCS/卷，10卷/箱。
2. 包装袋长度：每卷前后各空10-20个空格，中间包装。
3. 材质：  
载体：聚丙烯（PS），阻抗 $10^{6-9} \Omega$   
上带：聚乙烯（PET），阻抗 $10^{6-11} \Omega$   
卷盘：聚苯乙烯。

纸箱规格：345\*345\*23MM

纸箱规格：345\*345\*35MM

|  |          |  |     |   |           |
|--|----------|--|-----|---|-----------|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |          | 深圳市步步精科技有限公司<br>.X: ±0.38    .X': ±3'<br>.XX: ±0.25    .X'': ±2'<br>.XXX: ±0.13    .XX': ±1' |     | NAME: 拨动开关 SK-06A 侧拨 四脚贴片 带柱 端子SMT 260gf 编带 |           |
| APPD.  | JM_Zheng | PJ. NO.: 907-010-030001-J8G  |     | SIZE: A4   DRW NO.:                         |           |
| CHKD.  | LYX      | FINISH: SEE NOTES  |     | MAT'L.: SEE NOTES                           |           |
| PDWG.NO:   | 0124-1   | DR.  | SGF | SCALE: N/A                                  | REV.: A0  |
|  |          |  |     | UNIT: mm                                    | PAGE: 2/2 |