


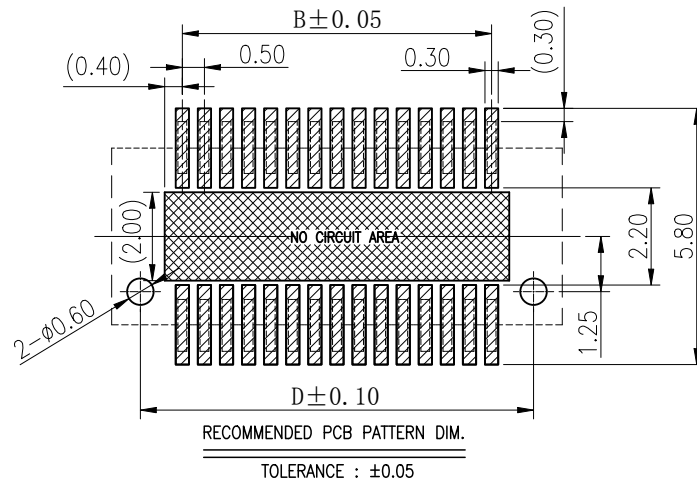
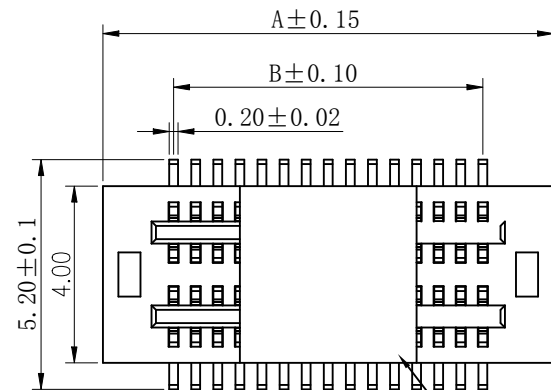

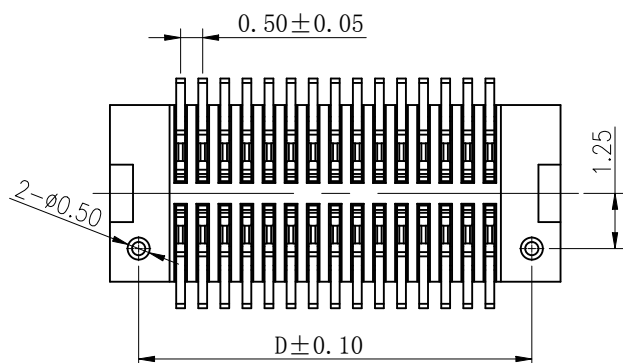




CAP



3D VIEW

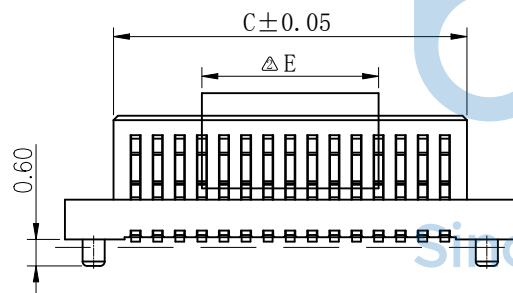

NOTES:

1. HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR: BLACK
2. TERMINAL: PHOSPHOR BRONZE
PLATING: 1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.

NO. of contacts	Dimensions					NO. of contacts	Dimensions				
	A.	B.	C.	D.	E.		A.	B.	C.	D.	E.
4	3.70	0.50	1.50	2.40	4.00	54	16.20	13.00	14.00	14.90	8.00
6	4.20	1.00	2.00	2.90		56	16.70	13.50	14.50	15.40	
8	4.70	1.50	2.50	3.40		58	17.20	14.00	15.00	15.90	
10	5.20	2.00	3.00	3.90		60	17.70	14.50	15.50	16.40	
12	5.70	2.50	3.50	4.40		62	18.20	15.00	16.00	16.90	
14	6.20	3.00	4.00	4.90		64	18.70	15.50	16.50	17.40	
16	6.70	3.50	4.50	5.40		66	19.20	16.00	17.00	17.90	
18	7.20	4.00	5.00	5.90		68	19.70	16.50	17.50	18.40	
20	7.70	4.50	5.50	6.40		70	20.20	17.00	18.00	18.90	
22	8.20	5.00	6.00	6.90		72	20.70	17.50	18.50	19.40	
24	8.70	5.50	6.50	7.40	8.00	74	21.20	18.00	19.00	19.90	
26	9.20	6.00	7.00	7.90		76	21.70	18.50	19.50	20.40	
28	9.70	6.50	7.50	8.40		78	22.20	19.00	20.00	20.90	
30	10.20	7.00	8.00	8.90		80	22.70	19.50	20.50	21.40	
32	10.70	7.50	8.50	9.40		82	23.20	20.00	21.00	21.90	
34	11.20	8.00	9.00	9.90		84	23.70	20.50	21.50	22.40	
36	11.70	8.50	9.50	10.40		86	24.20	21.00	22.00	22.90	
38	12.20	9.00	10.00	10.90		88	24.70	21.50	22.50	23.40	
40	12.70	9.50	10.50	11.40		90	25.20	22.00	23.00	23.90	
42	13.20	10.00	11.00	11.90		92	25.70	22.50	23.50	24.40	
44	13.70	10.50	11.50	12.40		94	26.20	23.00	24.00	24.90	
46	14.20	11.00	12.00	12.90		96	26.70	23.50	24.50	25.40	
48	14.70	11.50	12.50	13.40		98	27.20	24.00	25.00	25.90	
50	15.20	12.00	13.00	13.90		100	27.70	24.50	25.50	26.40	

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	E
3.0	0.8	2.2	1.6
3.5	1.3	2.2	1.6
4.0	1.0	3.0	1.9
4.5	1.0	3.5	1.9
5.0	1.0	4.0	1.9
5.5	1.0	4.5	1.9
6.0	2.0	4.0	1.9
6.5	2.0	4.5	1.9

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
CORPORATION AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG. NO: 0335-1
APPD. JM_Zheng
CHKD. LYX
DR. TSP



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"
.XX: ±0.25 .X": ±2"
.XXX: ±0.13 .X": ±1"

NAME: 板对板连接器 公座 0.5-2x5P 双槽BTB PLUG
合高H=4.0 SMT 带柱 (LB210-G10P-ROR)

PJ. NO.: △123-121-100002-W1G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2



NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
- 2.Carrier camber is within 1mm in 100mm.
- 3.Material: black conductive polystyrene alloy.
- 4.Material Thickness: 0.3 ± 0.05 mm.
- 5.All dimensions meet EIA-481-B requirements.
- 6.1000pcs Pef Reel.
- 7.For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.



Tape width 16 and 24 mm

Tape width 32 and 44 mm

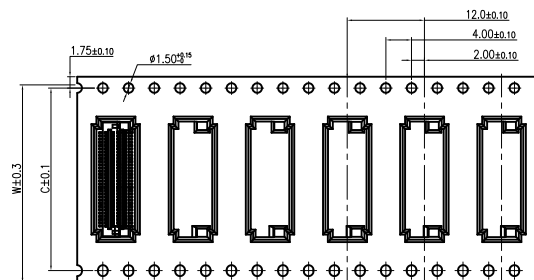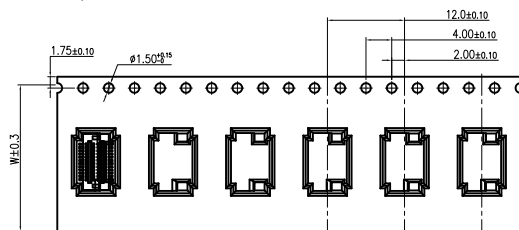

PULL OUT DIRECTION

PULL OUT DIRECTION

COVER TAPE
(上盖带)

PULL OUT DIRECTION


165°~180°
(PEELING ANGLE)

CARRIER TAPE
(下载带)

SAFE TAPE
(安全带L=1750mm Ref)

REEL
(胶盘)



GP LABLE
(环保标签)
(1PCS)

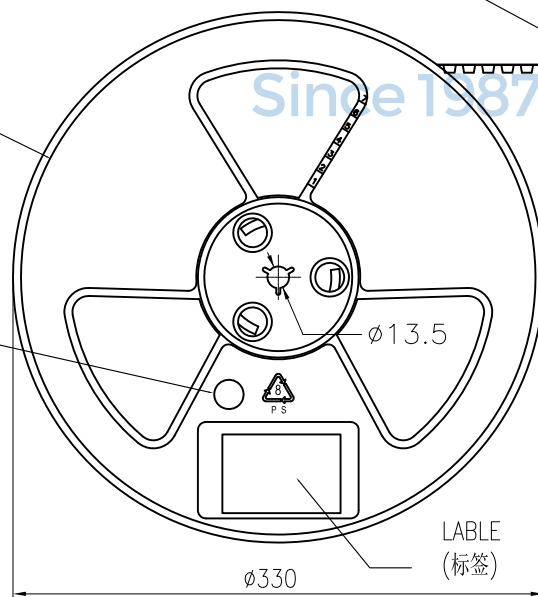

LABLE
(标签)



SCALE 1:4

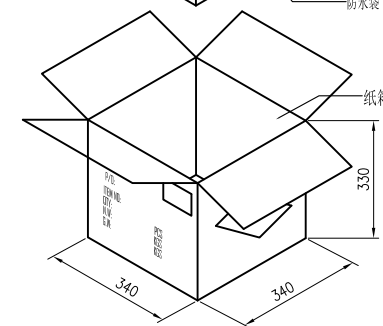

W	PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
4PIN~20PIN	16	—	—	1000	15	15000
22PIN~52PIN	24	—	—	1000	10	10000
54PIN~70PIN	32	28.4	—	1000	8	8000
72Pin~100PIN	44	40.4	—	1000	6	6000

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0335-1

 深圳市步步精科技有限公司						
.X: ±0.38		X': ±3°		NAME: 板对板连接器 公座 0.5-2x5P 双槽BTB PLUG 合高H=4.0 SMT 带柱 (LB210-G10P-ROR)		
.XX: ±0.25		X': ±2°				
.XXX: ±0.13		XX': ±1°				
APPD. JM_Zheng			PJ. NO.: △123-121-100002-W1G			
CHKD. LYX			SIZE: A4		DRW NO.:	
DR. TSP			FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A		REV.: A0	UNIT: mm	PAGE: 2/2