
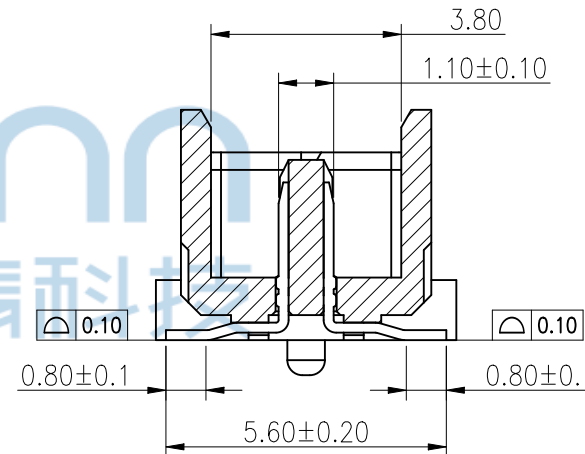



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP


NOTES:

- 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1*''GOLD FLASH OVERALL 50~100*''NICKEL UNDER PLATED.


3D VIEW

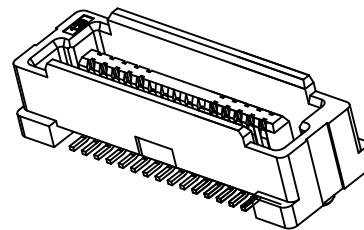

SECTION: A-A
SCALE 2:1

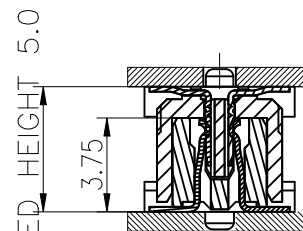

MATED HEIGHT

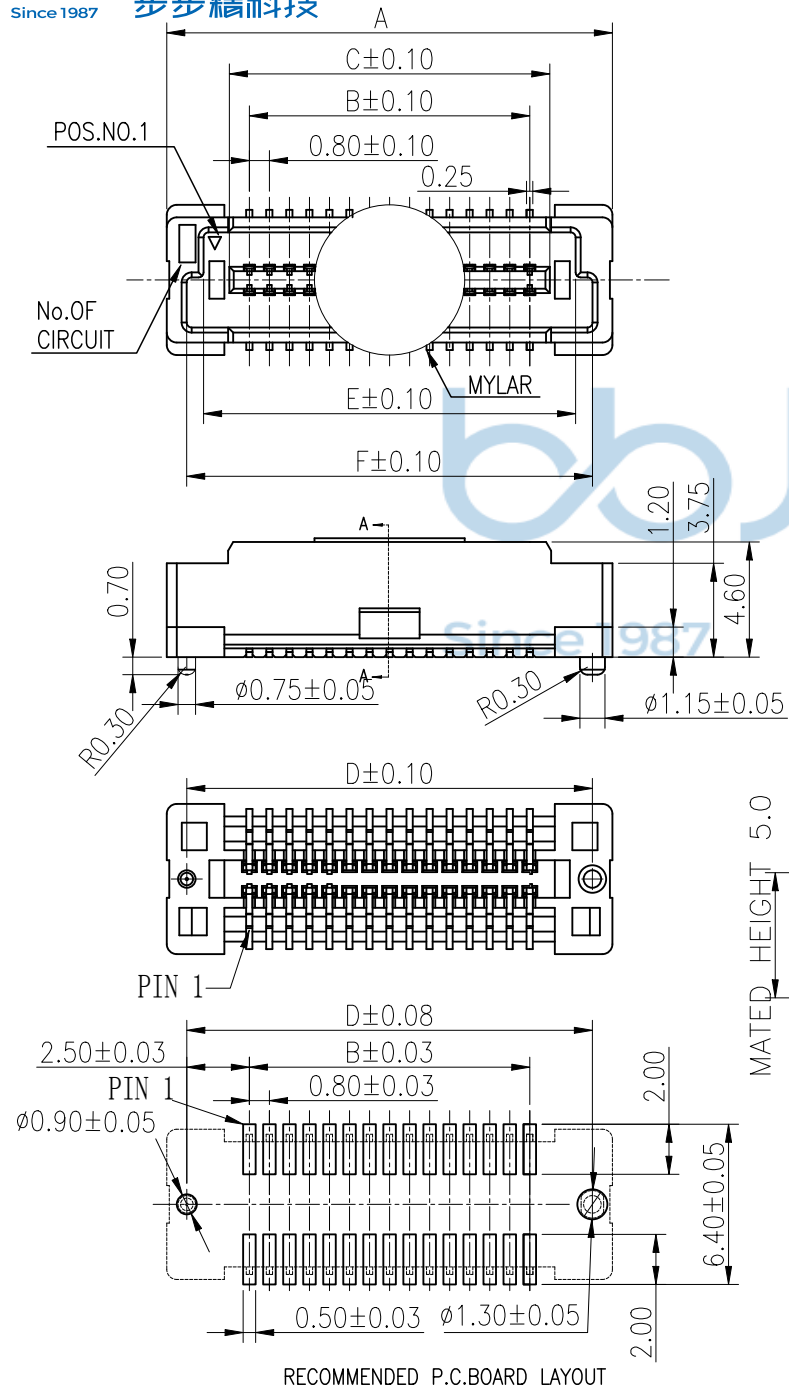


NO.of contacts	Dimensions					
	A	B	C	D	E	F
20	13.80	7.20	8.80	12.20	10.86	12.21
30	17.80	11.20	12.80	16.20	14.86	16.21

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.			深圳市步步精科技有限公司		
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'		NAME: 板对板连接器 公座 0.80-2x15P AMP BTB PLUG SMT 带柱 H=4.70 合高H=5.0	
APPD.	JM_Zheng	PJ. NO.: △123-134-300001-W1G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0335-1	DR.	TSP	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2




REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	GZY

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20
- 2.Carrier camber is within 1mm in 100mm.
- 3.Material: black conductive polystyrene alloy.
- 4.Material Thickness: 0.35 ± 0.05 mm.
- 5.For tape width(dim W)44 and 72mm pilot holes are provided on one sides.

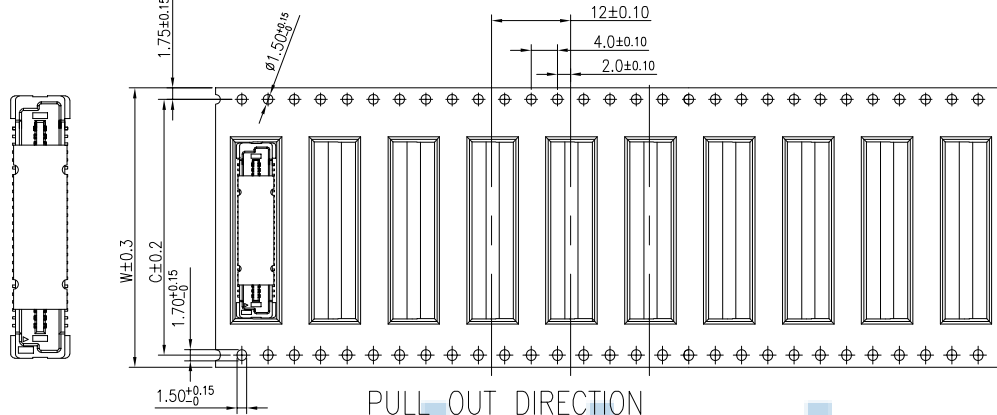

COVER TAPE (上盖带)
PULL OUT DIRECTION
(PEELING ANGLE)
CARRIER TAPE (下载带)

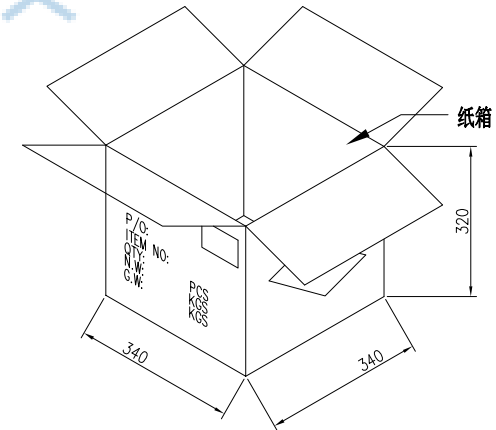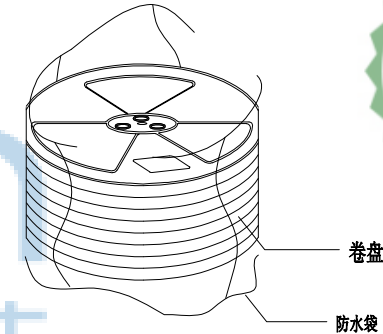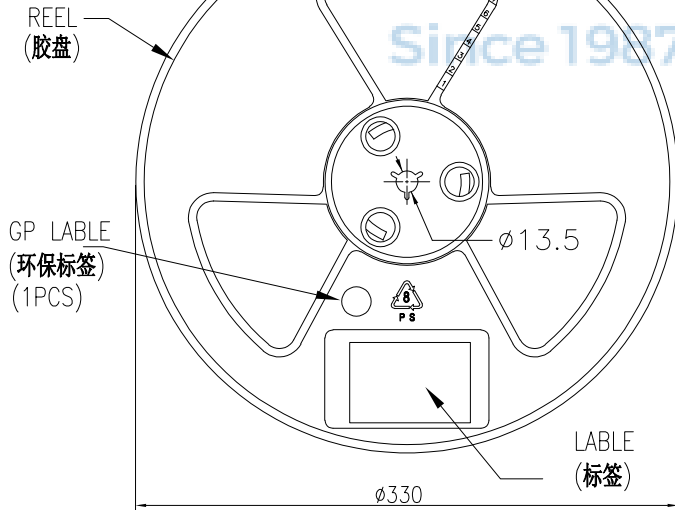

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
20~30PIN	32	28.4	1000	8	8000
40~60PIN	44	40.4	1000	6	6000
70~100PIN	56	52.4	1000	5	5000
120~140PIN	72	68.4	1000	4	4000

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.			深圳市步步精科技有限公司		
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13			NAME: 板对板连接器 公座 0.80-2x15P AMP BTB PLUG SMT 带柱 H=4.70 合高H=5.0		
APPD JM_Zheng			PJ NO:		
CHKD LYX			SIZE:A4 DRW NO:		
PDWG NO: 0335-1			FINISH:SEE NOTES MAT'L:SEE NOTES		
DR TSP			SCALE:N/A REV:A0 UNIT:mm PAGE:1/2		