






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES:


- 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1*''GOLD FLASH OVERALL 50~100*''NICKEL UNDER PLATED.

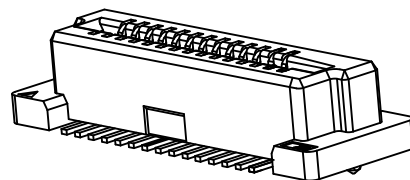


3D VIEW

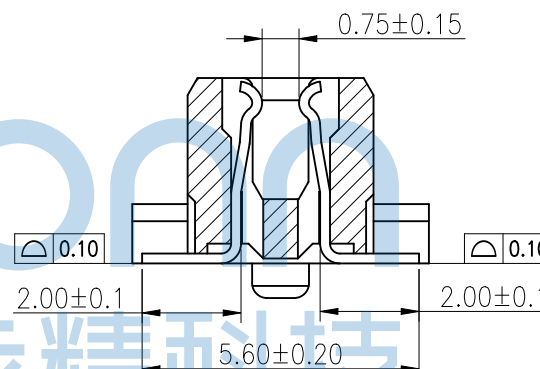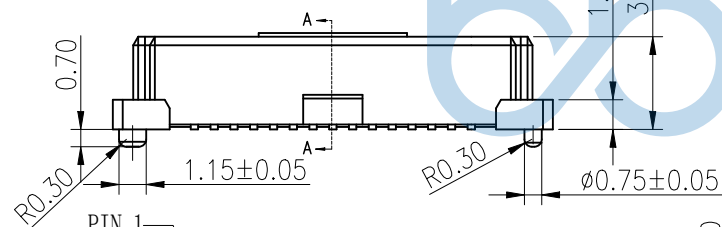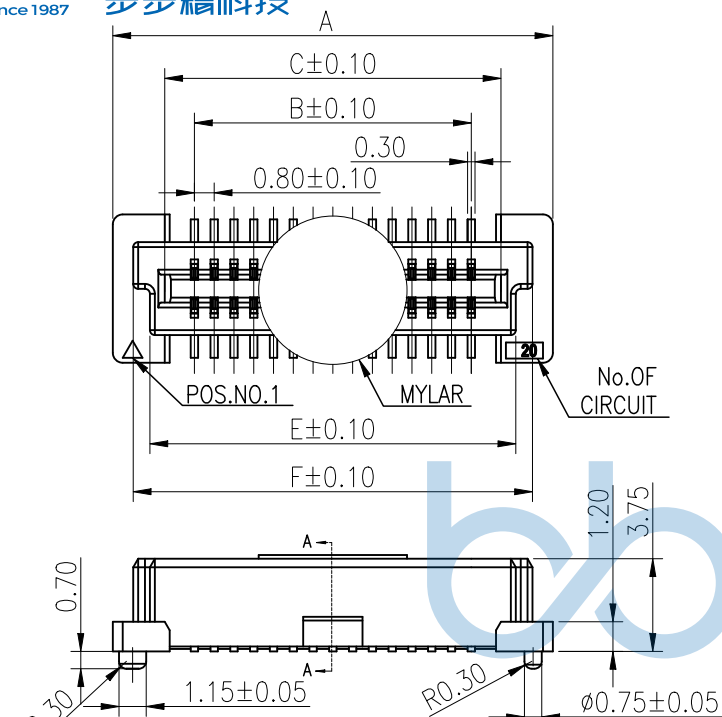

SECTION: A-A
SCALE 2:1

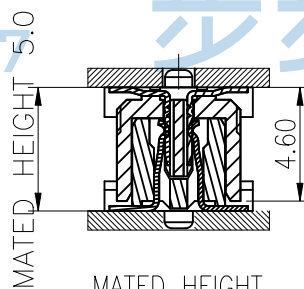

MATED HEIGHT

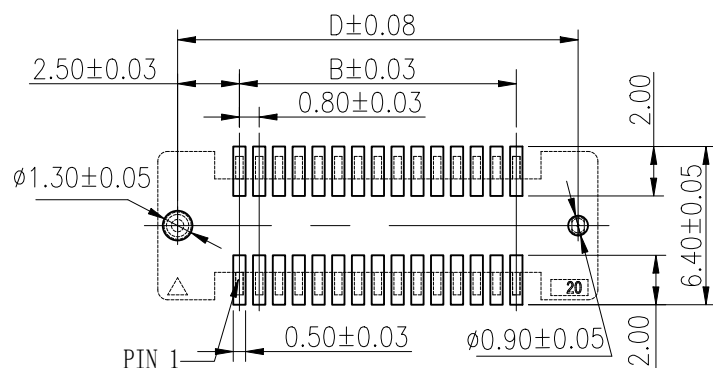

RECOMMENDED P.C.BOARD LAYOUT



NO.of contacts	Dimensions					
	A	B	C	D	E	F
20	13.80	7.20	9.60	12.20	10.80	12.15
30	17.80	11.20	13.60	16.20	14.80	16.15

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0335-1



深圳市步步精科技有限公司


.X: ± 0.38
.XX: ± 0.25
.XXX: ± 0.13

X': ± 3
X'': ± 2
X'': ± 1

NAME: 板对板连接器 母座 0.80-2x15P AMP BTB
SOCKET SMT 带柱 H=3.70 合高H=5.0



APPD. JM_Zheng
CHKD. LYX
DR. TSP

PJ. NO.: $\Delta 123-234-300001-W1G$
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

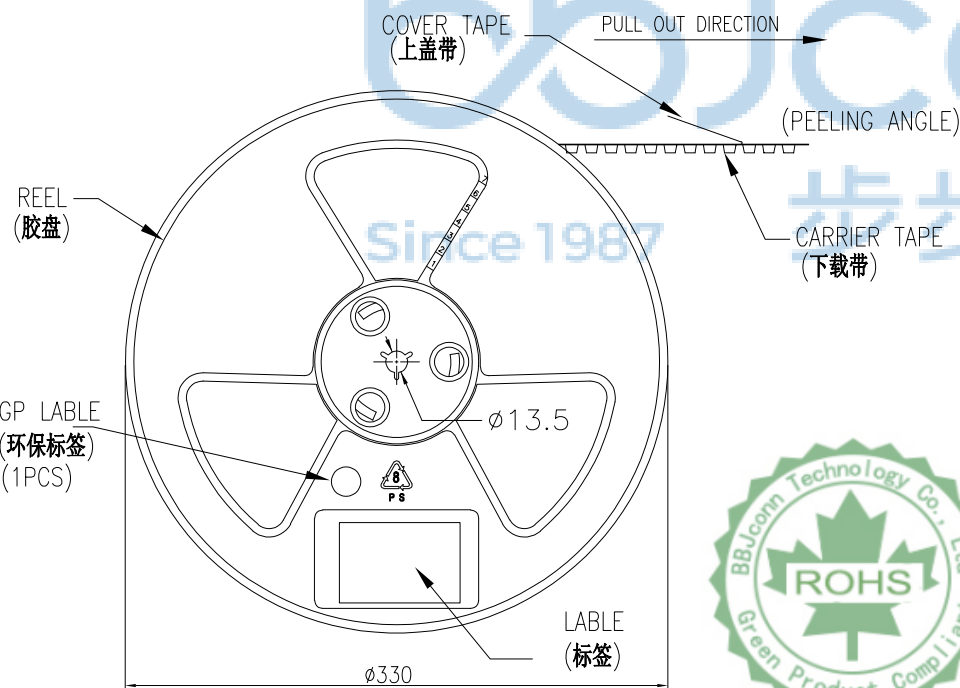

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
20~30PIN	32	28.4	1000	8	8000
40~60PIN	44	40.4	1000	6	6000
70~80PIN	56	52.4	1000	5	5000
100~140PIN	72	68.4	1000	4	4000

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness: 0.35 ± 0.05 mm.
5. For tape width (dim W) 44 and 72mm pilot holes are provided on one sides.

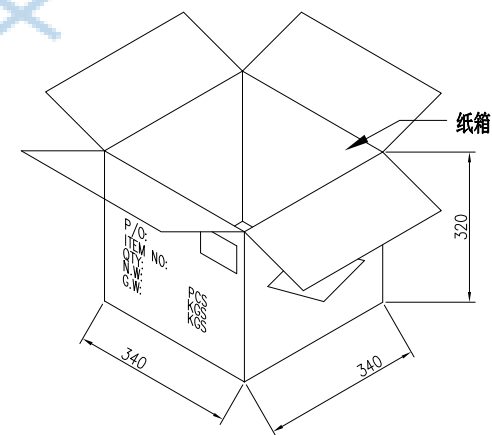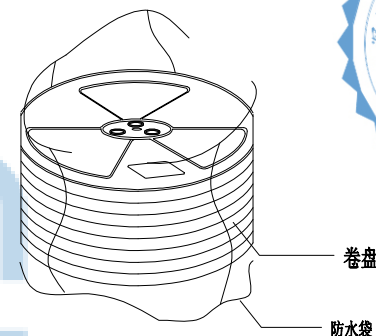

深圳市步步精科技有限公司

NAME: 板对板连接器 母座 0.80-2x15P AMP BTB
SOCKET SMT 带柱 H=3.70 合高H=5.0

	PJ NO:
---	--------

	SIZE:A4	DRW NO:
--	---------	---------

FINISH:SEE NOTES	MAT'L:SEE NOTES
------------------	-----------------

SCALE:N/A	REV:A0	UNIT:mm	PAGE:1/2
-----------	--------	---------	----------

