

Note:

1. Material:







- 1.1 Housing: PA9T
- 1.2 Contact:C7025,T=0.15mm
- 1.3 Shell: SUS304 T=0.3mm

2. ELECTRICAL:

- 2-1: CURRENT RATING:
VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;
- 2-2: INITIAL CONTACT RESISTANCE :40 MEGOHMS
- 2-3: DIELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;

3. MECHANICAL CHARACTERISTICS:




- 3-1: MATING FORCE:5~20N
- 3-2: UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)
- 3-3: FREQUENCY: 200±50 CYCLES / HOUR,
10000 CYCLES
- 3-4: OPERATING TEMPERATURE ; -40°~80°.

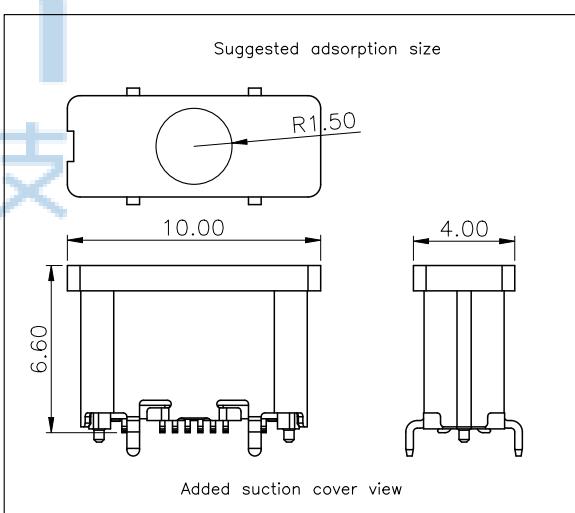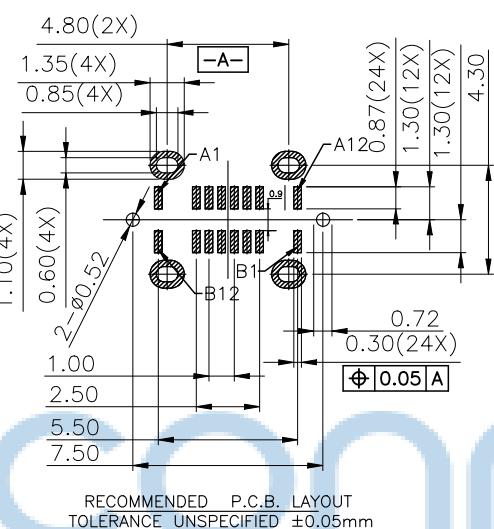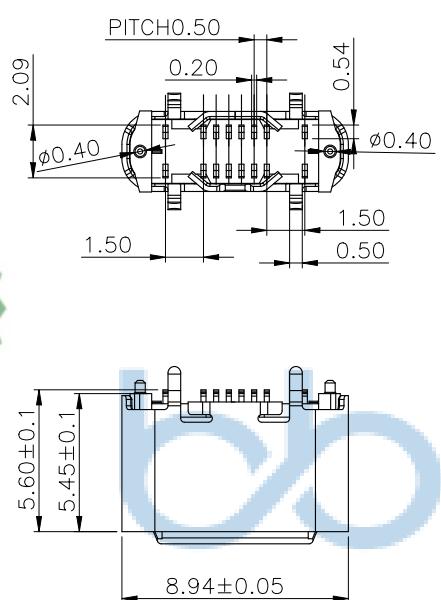



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

THIS DOCUMENT IS THE
SOLE PROPERTY OF
bbjconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0366-2

JB 深圳市步步精科技有限公司
X: ±0.38 X': ±3°
XX: ±0.25 X': ±2°
XXX: ±0.13 X': ±1°
NAME: TYPE-C 母座 16P 直立式 四脚插 端子SMT 带柱 舌
片外露 0.48 H=5.60 不锈钢外壳 PA9T黑胶 带盖编带
APPD JM_Zheng PJ NO: 126-224-160013-N5G
CHKD LYX SIZE:A4 DRW NO:
FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

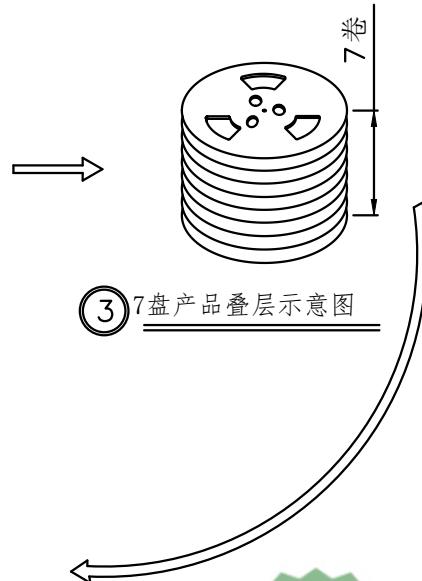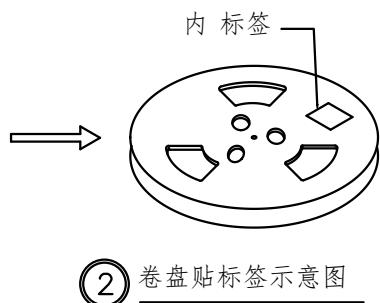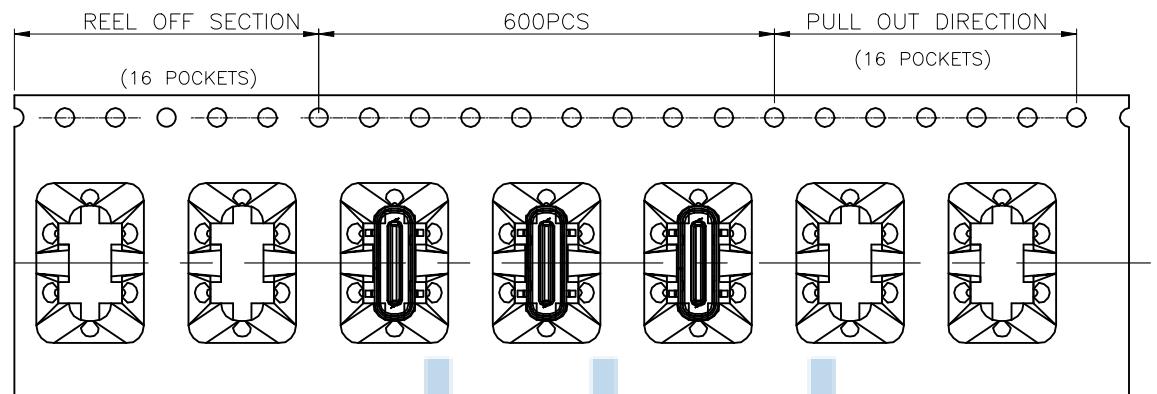


① 产品入载带示意图

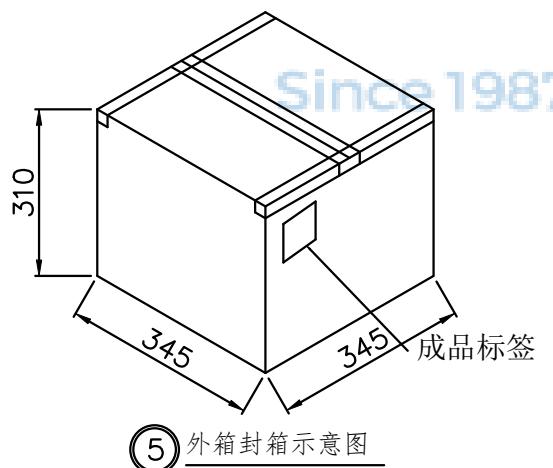

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装600PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠;具体如图三所示
4. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
- (产品包装的标签,如客户有要求,请按客户要求包装出货)
5. 载带前面留16PCS空格,后面留16PCS空格
6. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,
剥离角度:165° -180°

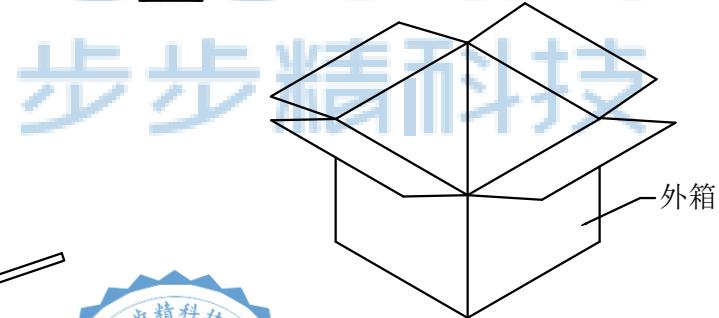

CONNECTOR (PCS)	REEL	CARTON
600	4200	

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0366-2



深圳市步步精科技有限公司
NAME: TYPE-C 母座 16P 直立式 四脚插 端子SMT 带柱 舌
.X: ±0.38 X: ±3°
.XX: ±0.25 .X: ±2°
.XXX: ±0.13 .XX: ±1°
APPD JM_Zheng PJ NO: 126-224-160013-N5G
CHKD LYX SIZE:A4 DRW NO:
FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV: A0 UNIT: mm PAGE: 2/2