


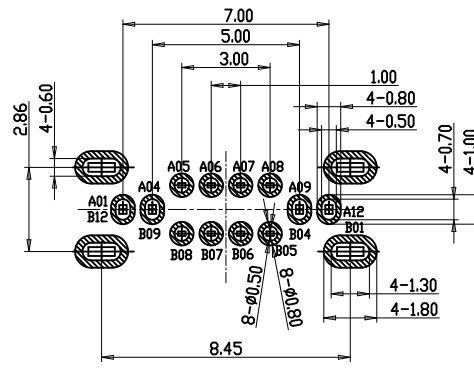


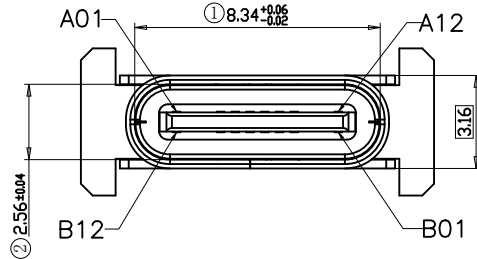

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

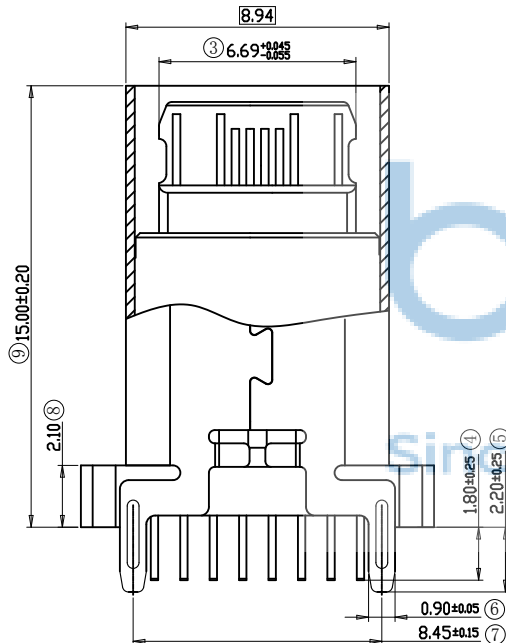

剖视图

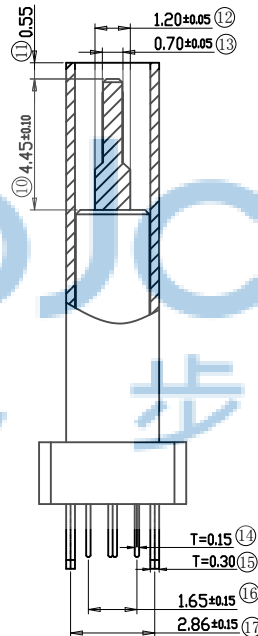

剖视图



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0366-2

深圳市步步精科技有限公司

NAME: TYPE-C 16P 母座 直立式 四脚插 端子DIP H=15.0 LCP蓝胶

PJ. NO.:126-225-160002-N5G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				


特性:

- 电气性能: ELECTRICAL
 - 额定电流: 5.0A
 - 接触阻抗: 40 MILLIOHMS MAX
 - 耐电压: 150V AC / 1 mA MAX
 - 绝缘阻抗: 150V DC/100 MEGA OHMS MIN
- 机械性能:
 - 插入力: 5~20N
 - 拨出力: 8~20N
 - 使用寿命: 10000次、拨出力 5N MIN
- 材料: MATERIAL
 - 塑胶: LCP/PA9T UL94V-0
 - 端子: C7025/C1814 T=0.15MM
 - 外壳: SUS304 T=0.30MM
 - 卡勾: SUS304 T=0.15MM
- 电镀: FINISH
 - 端子: 接触点镀金3U"MIN
PIN脚焊接区域镀金1U"MIN.
 - 外壳: 镀镍80U"MIN (盐雾48H)
- 电镀品需做粘锡测试: 粘锡面积达到95%以上。
- SMT回流焊 (峰值260° C±5° C) 不能起泡、
熔胶、变色不良 (变形在公差范围以内)
- 工作温度: -55° C~+85° C
- 盐雾测试: 通过48H在浓度为5±1%盐水的盐雾
测试无生锈现象

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

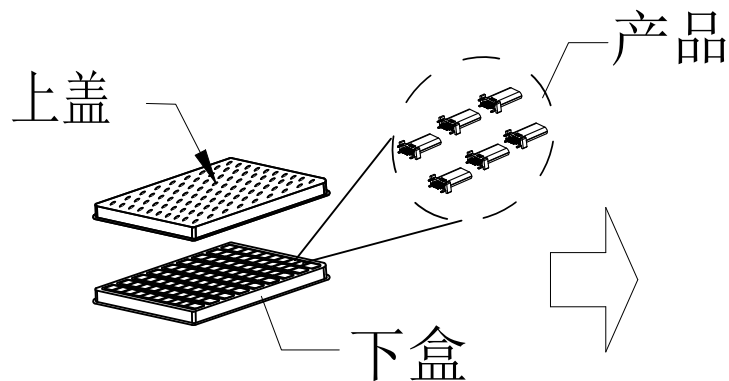

1 PE真空盒(1Set).




2 100Pcs/盒

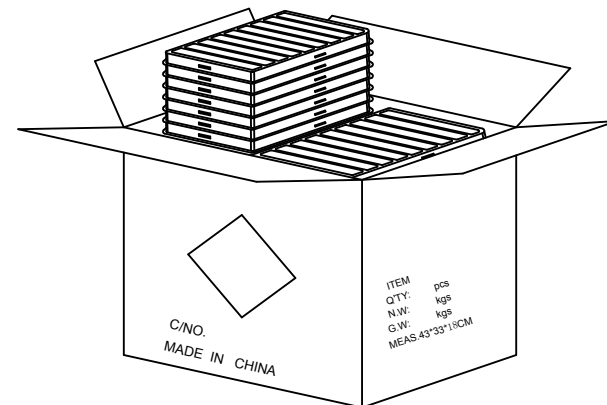


3 50盒/箱(5k).


外箱物料标签

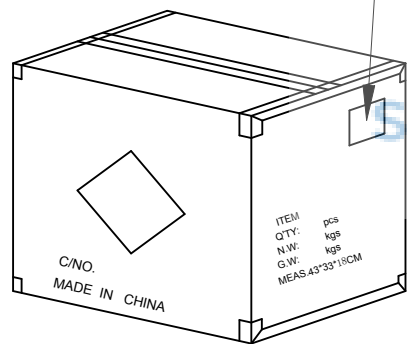

6 依图示粘贴产品或ROHS标签.

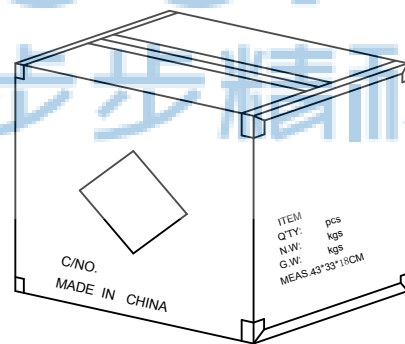

5 外箱用透明胶纸带封"工"字型.

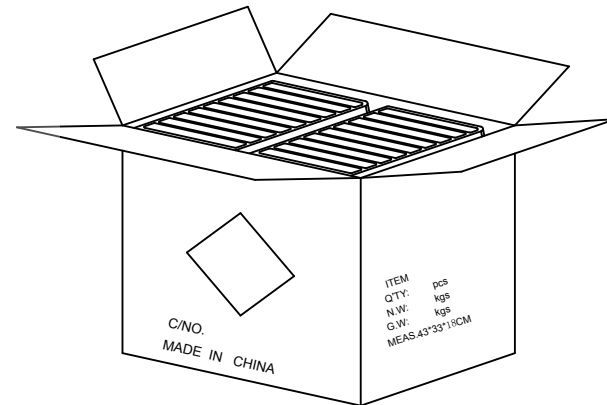

4 每箱横放25盒*2, 若尾数箱在空间处加装填充物.

备注:
1. PE真空盒1set
2. 每盒装成品100Pcs
3. 每箱数量5K
4. 外箱尺寸与规格: 43*33*18CM
5. 外箱用透明胶纸带封"工"字型;



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.		深圳市步步精科技有限公司	
Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$
APPD.	JM_Zheng	NAME:	TYPE-C 16P 母座 直立式 四脚插 端子DIP H=15.0 LCP蓝胶
CHKD.	LYX	PJ. NO.:	126-225-160002-N5G
DR.	TSP	SIZE:	A4
PDWG.NO:	0366-2	FINISH:	SEE NOTES
		MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	A0
		UNIT:	mm
		PAGE:	2/2