



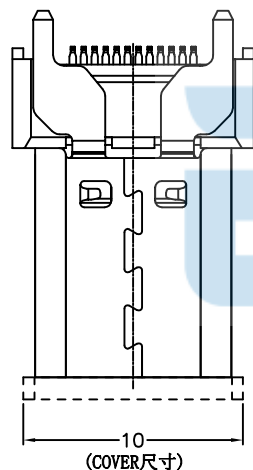
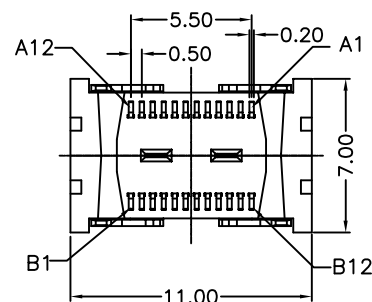
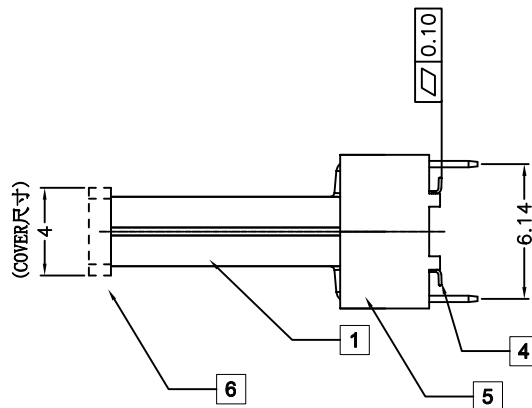





WITHOUT COVER

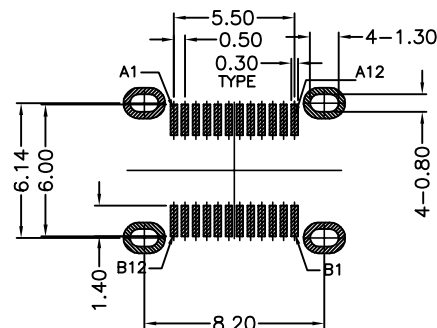

WITH COVER

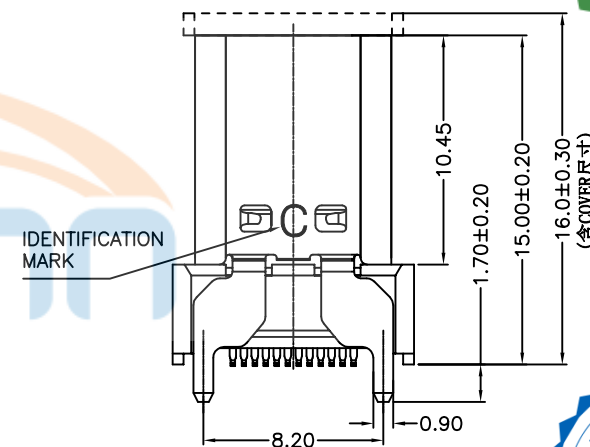

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05
KEEP OUT AREA




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

1. Contact Resistance: 40mOHM Max.;
2. Dielectric Withstanding Voltage: 100V AC For 1 Minute;
3. Insulation Resistance: 100M OHM Min.;
4. Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
6~20N AFTER TEST;
5. Durability: 10000 Cycles;



Item	Title	Material	Dispose	Q'TY
1	Shell	SUS304	Ni:30u" Min.	1PCS
2	GND Plate	SUS301		2PCS
3	Mid Plate	SUS301		1PCS
4	Contact	C7025	Mating Area: See P/N Solder Tails: Matt Tin	2PCS
5	Insert Molding	LCP E6808	UL 94V-0 Black	1PCS
6	COVER	LCP E6808	UL 94V-0 Black	1PCS

X. ± 0.50 X.* $\pm 2^{\circ}$.X ± 0.30 .X.* $\pm 1^{\circ}$.XX ± 0.25 .XX.* $\pm 0.5^{\circ}$.XXX ± 0.15				深圳市步步精科技有限公司			
TITLE: TYPE-C 24P 母座 直立式 四脚插 带四方柱 H=15.0 端子SMT							
DRAWN/ DATE	设计	LHC	SIZE:A4	UNIT:MM.	PART.NO: UC.01.52-1W-0042		
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本		
APPROVED/ DATE	核准	LJP	DWG. PATH	0366-2	SHEET: 页码		

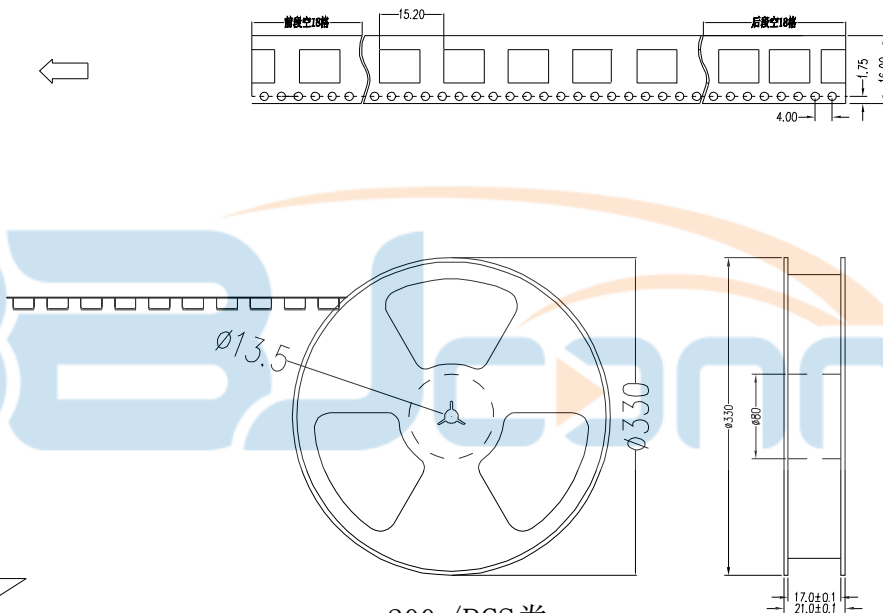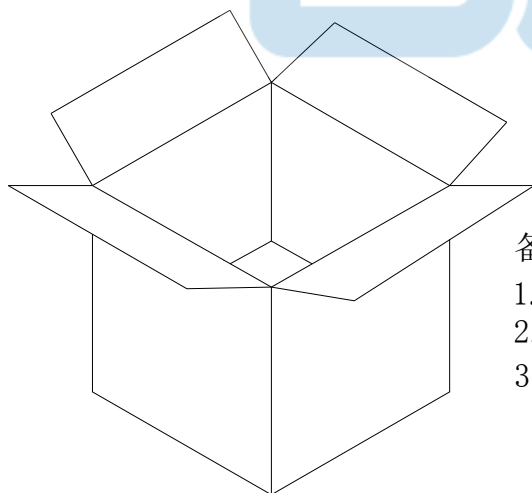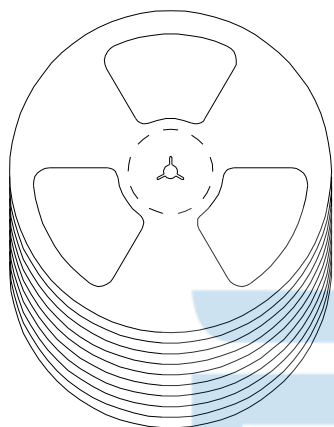

200 /PCS卷

备注:

1. 包装数量: 200 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



深圳市步步精科技有限公司

TITLE:
TYPE-C 24P 母座 直立式 四脚插 带四方柱 H=15.0 端子SMT

TOLERANCE UNSPECIFIED	
.0	±0.35
.00	±0.25
.000	±0.15
X. °	±2.00°
CUSTOMER DRAWING	
DRAWN/ DATE	设计 LHC
CHECKED/ DATE	审核 LYX
APPROVED/ DATE	核准 LJP

SIZE:A4	UNIT:MM.	PART. NO: UC.01.52-1W-0042	
SCALE: 1:1		PROJECTION	REV.: 版本
DWG. PATH		0366-2	SHEET: 页码